

Qwest Corporation Technical Publication

Unbundled Dedicated Local Interoffice Transport

**Copyright 1998, 1999, 2000, 2001, 2003, 2005
Qwest Communications International Inc.
All Rights Reserved**

**77389
Issue H
January 2005**

NOTICE

This publication provides technical information about the Unbundled Network Element *Unbundled Dedicated Interoffice Transport* (UDIT). This Unbundled Network Element is available to Competitive Local Exchange Carriers from Qwest. Network Channel and Network Channel Interface codes are included to describe and specify the transport channels.

Qwest Corporation reserves the right to revise this document for any reason, including but not limited to, conformity with standards promulgated by various governmental or regulatory agencies; utilization of advances in the state of the technical arts; or to reflect changes in the design of equipment, techniques, or procedures described or referred to herein.

Liability to anyone arising out of use or reliance upon any information set forth herein is expressly disclaimed, and no representation or warranties, expressed or implied, are made with respect to the accuracy or utility of any information set forth herein.

This document is not to be construed as a suggestion to any manufacturer to modify or change any of its products, nor does this publication represent any commitment by Qwest Corporation to purchase any specific products. Further, conformance to this publication does not constitute a guarantee of a given supplier's equipment and/or its associated documentation.

Ordering information for Qwest Publications can be obtained from the Reference Section of this document.

If further information is required, please contact:

Qwest Corporation
Manager – New Services Planning
700 W. Mineral Ave. IA H12.21
Littleton, CO 80120
(303) 707-9498 Fax #
E-mail: techpub@qwest.com

Throughout this publication, the term Qwest signifies Qwest Communications International Inc.

COMMENTS on PUB 77389

PLEASE SEND YOUR COMMENTS/SUGGESTIONS TO:

Qwest Corporation
Manager – New Services Planning
700 W. Mineral Ave. IA H12.21
Littleton, CO 80120
(303) 707-9498 Fax #
E-mail: techpub@qwest.com

Information from you helps us to improve our Publications. Please take a few moments to answer the following questions and send to the above address.

| | |
|--|--------------------|
| Was this Publication valuable to you in understanding the technical parameters of our service? | YES _____ NO _____ |
| Was the information accurate and up-to-date? | YES _____ NO _____ |
| Was the information easily understood? | YES _____ NO _____ |
| Were the contents logically sequenced? | YES _____ NO _____ |
| Were the tables and figures understandable and helpful | YES _____ NO _____ |
| Were the pages legible? | YES _____ NO _____ |

If you answered NO to any of the questions and/or if you have any other comments or suggestions, please explain:

(Attach additional sheet, if necessary)

Name _____ Date _____

Company _____

Address _____

Telephone Number _____

E-Mail _____

CONTENTS

| Chapter and Section | Page |
|---|------|
| 1. Introduction..... | 1-1 |
| 1.1 General..... | 1-1 |
| 1.2 Reason for Reissue | 1-1 |
| 1.3 Related Elements, Services and Supporting Documentation | 1-1 |
| 1.4 Tariffs, Catalogs and Contracts..... | 1-1 |
| 1.5 Document Organization..... | 1-2 |
| 2. Element Descriptions..... | 2-1 |
| 2.1 Unbundled Dedicated Interoffice Transport (UDIT) -- General..... | 2-1 |
| 2.2 Two-Point UDIT Channel..... | 2-1 |
| 2.2.1 UDIT-Interoffice Facility: UDIT-IOF..... | 2-2 |
| 2.2.2 Extended UDIT: E-UDIT..... | 2-2 |
| 2.2.3 Split UDIT: S-UDIT..... | 2-3 |
| 2.2.4 Meet Point UDIT: M-UDIT..... | 2-4 |
| 2.3 UDIT Multiplexer..... | 2-4 |
| 2.3.1 General Description..... | 2-4 |
| 2.3.2 High-Level Channel..... | 2-5 |
| 2.3.3 Low-Level Channel..... | 2-5 |
| 2.4 UDIT Element Applications..... | 2-6 |
| 2.5 "Design-To" Points and Interconnection Arrangements..... | 2-6 |
| 2.6 Connections with Other Local Exchange Carriers (LECs) using M-UDIT | 2-7 |
| 2.7 Synchronization..... | 2-7 |
| 2.8 Testing..... | 2-8 |
| 3. Network Channel/Network Channel Interface Codes..... | 3-1 |
| 3.1 Network Channel (NC) Codes..... | 3-1 |
| 3.1.1 General..... | 3-1 |
| 3.1.2 Format..... | 3-1 |
| 3.2 Network Channel Interface (NCI) Codes..... | 3-2 |
| 3.2.1 General..... | 3-2 |
| 3.2.2 Format..... | 3-2 |
| 3.3 Application of NC and NCI Codes..... | 3-5 |
| 3.4 NC and NCI Codes for Jumpers..... | 3-6 |

CONTENTS (Continued)

| Chapter and Section | Page |
|--|------|
| 4. DS3 Unbundled Dedicated Interoffice Transport (UDIT)..... | 4-1 |
| 4.1 Unbundled Network Element (UNE) Description..... | 4-1 |
| 4.2 Network Interfaces and Network Channel Interface (NCI) Codes..... | 4-1 |
| 4.3 Network Channel (NC) Codes..... | 4-2 |
| 4.4 DS3 Two-Point UDIT UNE..... | 4-3 |
| 4.5 DS3 UDIT Multiplexer UNE..... | 4-4 |
| 4.6 Valid NC and NCI Code Combinations..... | 4-5 |
| 4.7 DS1 Low-Level Channels and Options..... | 4-6 |
| 5. DS1 Unbundled Dedicated Interoffice Transport | 5-1 |
| 5.1 Unbundled Network Element (UNE) Description..... | 5-1 |
| 5.2 Network Channel (NC) and Network Channel Interface (NCI) Codes..... | 5-1 |
| 5.3 DS1 Level Network Channel (NC) Codes..... | 5-2 |
| 5.4 DS1 Two-Point UDIT UNE..... | 5-3 |
| 5.5 DS1 UDIT Multiplexer UNE..... | 5-3 |
| 5.6 Valid DS1 NC and NCI Code Combinations..... | 5-5 |
| 5.7 DS0/Voice Level Channels..... | 5-5 |
| 5.7.1 Analog Voice Channels..... | 5-5 |
| 5.7.2 Digital Data Channels..... | 5-7 |
| 5.7.3 Basic Rate ISDN Channels..... | 5-10 |
| 5.8 Application Example..... | 5-10 |
| 5.9 Generic Channel Unit Descriptions..... | 5-11 |
| 5.9.1 Foreign Exchange (2FXOG, 2FXSG) | 5-12 |
| 5.9.2 Transmission Only (ETO2G, ETO4) | 5-13 |
| 5.9.3 Dial Pulse (DPO, DPTG) | 5-14 |
| 5.9.4 Office Channel Unit-Data Port (OCU-DP) | 5-15 |
| 5.9.5 Digital Signal Level Zero-Data Port (DS0-DP)..... | 5-16 |
| 5.9.6 ISDN “U” Interface Channel Unit | 5-17 |
| 5.10 Application Example -- Continued..... | 5-19 |

CONTENTS (Continued)

| Chapter and Section | Page |
|--|-------------|
| 6. DS0 Unbundled Dedicated Interoffice Transport | 6-1 |
| 6.1 General Description..... | 6-1 |
| 6.2 Valid Network Channel/Network Channel Interface Combinations..... | 6-1 |
| 6.3 Application Examples | 6-3 |
| 6.3.1 Analog Voice Example | 6-3 |
| 6.3.2 Digital Data Example..... | 6-3 |
| 7. Unbundled Customer Controlled Reconfiguration Element..... | 7-1 |
| 7.1 Element Description | 7-1 |
| 7.2 Types of Ports..... | 7-1 |
| 7.3 Types of Digital Cross-Connect Systems..... | 7-2 |
| 7.4 Terminations and Design Issues..... | 7-3 |
| 7.5 Applicable Network Channel and Network Channel Interface Codes..... | 7-3 |
| 7.5.1 DS1 Ports..... | 7-3 |
| 7.5.2 DS3 Ports..... | 7-4 |
| 7.5.3 Virtual Ports..... | 7-5 |
| 7.5.4 Summary of NC/NCI codes..... | 7-5 |
| 7.6 Establishing a Customer Network..... | 7-5 |
| 8. OC-n Unbundled Dedicated Interoffice Transport (UDIT) | 8-1 |
| 8.1 General Description..... | 8-1 |
| 8.2 Network Interfaces and Network Channel Interface (NCI) Codes..... | 8-1 |
| 8.2.1 Optical Network Interfaces -- General..... | 8-3 |
| 8.2.2 OC-3 Interface..... | 8-3 |
| 8.2.3 OC-12 Interface..... | 8-3 |
| 8.2.4 OC-48 Interface..... | 8-4 |
| 8.2.5 OC-192 Interface..... | 8-4 |
| 8.2.6 Four Fiber OC-n Interfaces..... | 8-4 |
| 8.2.7 Optical "Design-To" Point..... | 8-4 |
| 8.3 OC-n Two-Point UDIT Elements..... | 8-5 |
| 8.4 Protection Configuration | 8-6 |
| 8.5 Application Example..... | 8-6 |

CONTENTS (Continued)

| Chapter and Section | Page |
|---|------|
| 9. Extended-UDIT (E-UDIT) | 9-1 |
| 9.1 Introduction | 9-1 |
| 9.2 General Description | 9-1 |
| 9.3 Basic Transport Facility | 9-4 |
| 9.3.1 Establishing the Facility | 9-4 |
| 9.3.2 Description of Optical Interfaces | 9-5 |
| 9.3.3 Description of DS1 Metallic Interfaces | 9-6 |
| 9.3.4 NCI Codes in Qwest Wire Center | 9-7 |
| 9.3.5 Channel/Interface Level Relationships | 9-8 |
| 9.4 Compatible NC and NCI Codes | 9-8 |
| 9.5 E-UDIT Parameters | 9-8 |
| 9.6 Entrance to Other Carrier's Wire Center | 9-8 |
| 9.7 Example of NC and NCI Code Usage | 9-9 |
| 9.8 SONET Optical Multiplexer Configuration NCI Codes | 9-11 |
| 10. Definitions | 10-1 |
| 10.1 Acronyms | 10-1 |
| 10.2 Glossary | 10-2 |
| 11. References | 11-1 |
| 11.1 American National Standards Institute Documents | 11-1 |
| 11.2 Telcordia Documents | 11-1 |
| 11.3 Qwest Technical Publications | 11-1 |
| 11.4 Ordering Information | 11-2 |
| 11.5 Trademarks | 11-3 |

| Appendix | Page |
|--|------|
| A. Combining Unbundled Network Elements | A-1 |
| A.1 General | A-1 |
| A.2 Example 1 -- Loop Only, Connection to Collocated Equipment | A-2 |
| A.3 Example 2 -- Non-Loaded Loop Only For DS1 Transport | A-3 |
| A.4 Example 3 -- Loop and DS1 Transport with Collocation | A-4 |
| A.5 Example 4 -- Loop, Collocated Equipment and Finished Service | A-5 |
| A.6 Example 5 -- Loop, Multiplexers and DS3 Transport | A-6 |
| A.7 Example 6 -- Loop, Switch and DS1 Transport | A-8 |
| A.8 Typical Ordering Process -- An Example | A-10 |
| A.8.1 General | A-10 |
| A.8.2 The Steps -- Single Collocation Example | A-10 |
| A.8.3 The Steps -- Collocation in Both Wire Centers Example | A-13 |

CONTENTS (Continued)

| Figures | Page |
|---|-------------|
| 2-1 UDIT Two-Point Channel..... | 2-2 |
| 2-2 UDIT Multiplexer..... | 2-4 |
| 3-1 Format Structure for NC Codes..... | 3-1 |
| 3-2 Format Structure for NCI Codes..... | 3-2 |
| 3-3 Code Application -- Two-Point Element..... | 3-5 |
| 3-4 Code Application -- Multiplexer Element | 3-5 |
| 4-1 Typical DS3 Two-Point UDIT..... | 4-4 |
| 4-2 Typical DS3 Unbundled Multiplexing..... | 4-5 |
| 5-1 Typical DS1 Two-Point UDIT..... | 5-3 |
| 5-2 Typical DS1 Unbundled Multiplexing..... | 5-4 |
| 5-3 DS1 UDIT Example Configuration..... | 5-12 |
| 5-4 Worst Case ISDN Basic Access Configuration | 5-18 |
| 6-1 DS0 Level UDIT UNE..... | 6-1 |
| 6-2 Open End -- Closed End | 6-2 |
| 7-1 Unbundled Customer Reconfiguration Element Port | 7-2 |
| 7-2 Example of Customer Network..... | 7-7 |
| 8-1 Optical Interface Arrangements..... | 8-2 |
| 8-2 OC-n Two-Point UDIT Element..... | 8-5 |
| 8-3 OC-n UDIT Application Example | 8-6 |
| 9-1 Typical E-UDIT Arrangement..... | 9-2 |
| 9-2 Typical E-UDIT Plus UDIT Arrangement | 9-3 |
| 9-3 Example -- Jointly Provided Facility..... | 9-11 |
| A-1 Unbundled Loop to Collocated Equipment..... | A-2 |
| A-2 Unbundled Loop for DS1 and Collocation..... | A-3 |
| A-3 Unbundled Loop, Collocation and DS1 UDIT..... | A-4 |
| A-4 Connections With Finished Services..... | A-5 |
| A-5 Loop, Multiplex and DS3 Transport Example..... | A-7 |
| A-6 Loop, Switch and DS1 Transport Example | A-9 |
| A-7 Typical Ordering Process Example | A-11 |

CONTENTS (Continued)

| Tables | Page |
|---|-------------|
| 3-1 NCI Impedance Values | 3-3 |
| 3-2 NCI Transmission Levels..... | 3-4 |
| 3-3 NC and NCI Codes for Ordering Jumpers..... | 3-6 |
| 3-4 NC Code Definitions for Jumpers | 3-7 |
| 3-5 NCI Code Definitions for Jumpers..... | 3-7 |
| 4-1 Applicable DS3 Network Channel Interface Codes -- DS3 UDIT..... | 4-1 |
| 4-2 Applicable DS3 Network Channel Codes -- DS3 UDIT | 4-3 |
| 4-3 Applicable DS1 Level Codes -- DS3 UDIT Multiplexer..... | 4-6 |
| 5-1 Applicable DS1 Network Channel Interface Codes -- DS1 UDIT..... | 5-1 |
| 5-2 Applicable DS1 Level Network Channel Codes -- DS1 UDIT..... | 5-2 |
| 5-3 Transmission Level Point Limits | 5-5 |
| 5-4 Analog Channel Applications..... | 5-6 |
| 5-5 Digital Data Channel Applications..... | 5-9 |
| 5-6 Basic Rate ISDN Channel Applications..... | 5-10 |
| 5-7 DS1 UDIT Example Low Level (DS0) Circuits | 5-11 |
| 5-8 Typical FXOG/FXSG Channel Unit Options..... | 5-13 |
| 5-9 Typical ETO2G Channel Unit Options..... | 5-14 |
| 5-10 Typical ETO4 Channel Unit Options..... | 5-14 |
| 5-11 Typical DPO/DPTG Channel Unit Options..... | 5-15 |
| 5-12 Typical OCU-DP Channel Unit Options | 5-16 |
| 5-13 Typical DS0-DP Channel Unit Options..... | 5-17 |
| 5-14 Typical ISDN "U" Interface Channel Unit Options..... | 5-18 |
| 6-1 DS0 UDIT NC/NCI Combinations..... | 6-2 |
| 7-1 DS1 Port Network Channel Codes..... | 7-4 |
| 7-2 Compatible NC and NCI Codes..... | 7-6 |
| 8-1 OC-n UDIT Network Interface Availability..... | 8-1 |
| 8-2 Interface Combinations..... | 8-2 |
| 8-3 Minimum Fixed Optical Power Point | 8-4 |
| 8-4 Two-Point OC-n UDIT Network Channel Codes | 8-5 |
| 8-5 OC-n UDIT Network Channel Interface Codes..... | 8-5 |

CONTENTS (Continued)

| Tables | Page |
|---|-------------|
| 9-1 Optical Interface NCI Codes (SONET) | 9-5 |
| 9-2 DS1 Metallic NCI Codes..... | 9-7 |
| 9-3 NCI Codes in Qwest Wire Center..... | 9-7 |
| 9-4 E-UDIT Compatible NC and NCI Codes..... | 9-9 |
| 9-5 UNEs Ordered by CLEC -- Jointly Provided Facility..... | 9-10 |

CONTENTS

| Chapter and Section | Page |
|--|-------------|
| 1. Introduction..... | 1-1 |
| 1.1 General | 1-1 |
| 1.2 Reason for Reissue | 1-1 |
| 1.3 Related Elements, Services and Supporting Documentation..... | 1-1 |
| 1.4 Tariffs, Catalogs and Contracts..... | 1-1 |
| 1.5 Document Organization..... | 1-2 |

1. Introduction

1.1 General

This publication provides technical information about the Unbundled Network Element *Unbundled Dedicated Interoffice Transport* (UDIT). This Unbundled Network Element is available to Certified Local Exchange Carriers from Qwest. Network Channel and Network Channel Interface codes are included to describe and specify the transport channels. Product definitions for UDIT and Extended UDIT (E-UDIT) vary by jurisdiction. See state specific Statement of Generally Available Terms and Conditions (SGAT) for availability.

1.2 Reason for Reissue

This publication is being revised to:

- **Sec. 2.2.3, Para 4.5, Para 8.1, Para 9.1, and Para 9.3:** Eliminated non-technical terms and conditions that are already more appropriately defined in other documents (i.e. the PCAT)
- **Para 2.3.2 & 2.3.3:** Provided clarity for the description of High-Side and Low-Side channels for multiplexing functionality associated with UDIT.
- **Para 4.3:** Eliminated redundant verbiage
- **Para 5.7.1:** Move a DS0 figure, Figure 5-3 and corresponding paragraph to Chapter 6, DS0 UDIT
- **Para 6.1:** Added DS0 figure from chapter 5
- **Para 7.1** Modified statement to be in alignment with current UCCRE product offering.
- **Para 8.4:** Eliminated redundant verbiage that is not relevant to UDIT.
- **Para 8.6:** Moved OCn UDIT NCI code descriptions and options from Chapter 9, Extended UDIT, to Chapter 8, OCn UDIT.
- **Para 9.1, Para 9.3, and Para 9.5:** Removed redundant verbiage that is not relevant to E-UDIT
- **Para 9.7:** Moved OCn UDIT NCI code descriptions and options from Chapter 9, Extended UDIT, to Chapter 8, OCn UDIT.

1.3 Related Elements, Services and Supporting Documentation

Competitive Local Exchange Carriers (CLECs) purchasing UDIT will normally use the Unbundled Network Element (UNE) to connect to collocated equipment or other UNEs. Several of these are mentioned in this publication.

This UNE is to be used by the CLEC for the transport of local services and should not be confused with Special Access Private Line Service.

CLECs that choose to collocate Qwest should consult PUB 77386, *Interconnection and Collocation for Transport and Switched Unbundled Network Elements and Finished Services*. This publication describes the technical issues related to collocation and describes connections with other services or UNEs.

Qwest's Unbundled Loop is described in PUB 77384, *Interconnection - Unbundled Loop*. Qwest's Unbundled Switch Elements are described in PUB 77391, *Unbundled Switch Elements*.

1.4 Tariffs, Catalogs and Contracts

Further information about the UDIT may be found in tariffs, catalogs or contracts. Such jurisdiction- or customer-specific descriptions supersede the information in this publication.

Some contracts and state regulatory orders may require that Qwest place the jumpers on the InterConnection Distribution Frame (ICDF) cross-connect frame. The jumpers will be placed when the CLEC orders the Expanded Interconnection Channel Terminations. The text in this technical publication and the attached appendices may not always reflect this situation.

1.5 Document Organization

This document is organized as follows:

| <u>Chapter</u> | <u>Contents</u> |
|-----------------------|---|
| 1 | Introduction |
| 2 | General description of the UNEs |
| 3 | General information about Network Channel and Network Channel Interface Codes |
| 4 | DS3 UDIT |
| 5 | DS1 UDIT |
| 6 | DS0 UDIT |
| 7 | Unbundled Customer Controlled Rearrangement Element |
| 8 | OC-n Level UDIT |
| 9 | Extended-UDIT, Connections with other carriers |
| 10 | Glossary |
| 11 | References and Trademarks |
| Appendix A | Examples of proper Network Channel and Network Channel Interface code usage when combining UNEs |

CONTENTS

| Chapter and Section | Page |
|---|------|
| 2. Element Descriptions | 2-1 |
| 2.1 Unbundled Dedicated Interoffice Transport (UDIT) -- General..... | 2-1 |
| 2.2 Two-Point UDIT Channel | 2-1 |
| 2.2.1 UDIT-Interoffice Facility: UDIT-IOF | 2-2 |
| 2.2.2 Extended UDIT: E-UDIT..... | 2-2 |
| 2.2.3 Split UDIT: S-UDIT..... | 2-3 |
| 2.2.4 Meet Point UDIT: M-UDIT..... | 2-4 |
| 2.3 UDIT Multiplexer | 2-4 |
| 2.3.1 General Description..... | 2-4 |
| 2.3.2 High-Level Channel..... | 2-5 |
| 2.3.3 Low-Level Channel | 2-5 |
| 2.4 UDIT Element Applications..... | 2-6 |
| 2.5 “Design-To” Points and Interconnection Arrangements..... | 2-6 |
| 2.6 Connections with Other Local Exchange Carriers (LECs) using M-UDIT | 2-7 |
| 2.7 Synchronization..... | 2-7 |
| 2.8 Testing..... | 2-8 |

Figures

| | |
|----------------------------------|-----|
| 2-1 UDIT Two-Point Channel | 2-2 |
| 2-2 UDIT Multiplexer | 2-4 |

2. Element Descriptions

2.1 Unbundled Dedicated Interoffice Transport (UDIT) -- General

UDIT is an Unbundled Network Element (UNE) available to registered Competitive Local Exchange Carriers (CLECs). UDIT is available as a two-point channel. Stand alone multiplexing is also offered associated with the UDIT product. Unbundled Customer Controlled Reconfiguration Element (UCCRE) is described in Chapter 7.

The two-point UDIT provides an unchannelized transport channel between two Qwest wire centers. These interoffice transport channels are available at Optical Carrier, DS3 signal levels, DS1 signal levels, and DS0/Voice levels. Optical Carrier includes OC-3 through OC-192 bandwidth and such high capacity transports as evolve over time, where facilities are available. UDIT is offered between Qwest wire centers in the same Local Access and Transport Area (LATA) and state. A UDIT may also go between a Qwest wire center and another Local Exchange Carrier's (LEC) wire center located outside Qwest's exchange area. Section 2.7 contains further information.

A variation, called Extended UDIT (E-UDIT), is available to provide a UDIT-like channel between another carrier's wire center located within Qwest's exchange area and an adjacent Qwest wire center. An Extended UDIT and a UDIT can be ordered together. This type of single circuit includes a channel from the CLEC's wire center, through the Qwest serving wire center and on to the CLEC's established collocation in a distant Qwest wire center. See Chapter 9 for further information about Extended UDIT.

Multiplexing is available at 3/1 and 1/0 levels. . General information about the UNE described in this publication may be limited or modified in specific jurisdictions as described in tariffs, catalogs or contracts.

2.2 The UDIT Channel

Figure 2-1 illustrates a point-to-point UDIT channel. The channel connects two Network Interfaces (NIs) located in different wire centers.

The NI is at the InterConnection Distribution Frame (ICDF) cross-connect frame. The ICDF and the "Design-To" Points are described in PUB 77386. The ICDF serves as the NI between the UDIT channel and the CLEC's Interconnector Designated Equipment or other UNEs. Further information about the NIs may be found in Chapter 3.

The CLEC identifies the ICDF Alternate Point of Termination (APOT) when ordering UDIT elements. The APOT is provided by Qwest when collocation is established. .

Specific information about the different level UDIT channels may be found in subsequent chapters.

UDIT is a point-to-point channel between two network sites, generally central office buildings. UDIT is transported on any available interoffice facility. No special protection such as diversity is provided other than what might be included with the facility. Product distinctions for UDIT are described below.

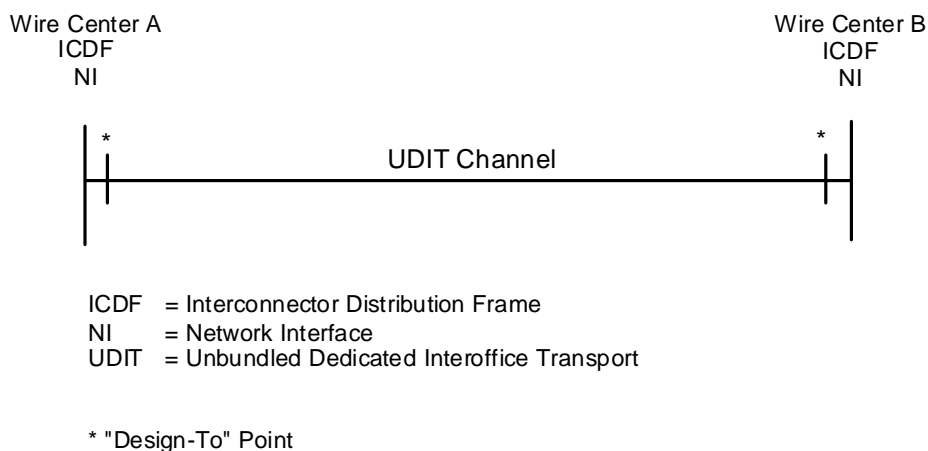


Figure 2-1: UDIT Channel

2.2.1 UDIT-Interoffice Facility: UDIT-IOF

UDIT provides a single transmission path between Qwest end office switches, serving wire centers or tandem switches in the same LATA and state. UDIT is a bandwidth-specific interoffice transmission path designed to a DSX panel (or equivalent) in each central office building. The CLEC must have collocation in each Qwest wire center and have requested termination capacity through the collocation process. UDIT is available in DS0, DS1, DS3, OC-3, OC-12, OC48 and such higher capacities as evolve over time where facilities are available. . It is the CLEC's responsibility to design from the DSX to the demarcation point.

2.2.2 Extended UDIT: E-UDIT

Extended UDIT (E-UDIT) provides a band-width specific transmission path between a Qwest central office building and the central office building of a CLEC or an Interexchange Carrier (IXC) Point Of Presence (POP) within the same Qwest Serving Wire Center area.. The interface point distant from the Qwest central office building must be distinct from an End User and within Qwest territory. E-UDIT cannot traverse a Qwest wire center. The location of the other carrier will be considered a carrier wire center only if it meets certain criteria: 1) Its location has V&H coordinates, 2) The wire center contains a device that switches traffic, or a node leading to such a switch, 3) The switch is registered with a CLLI code listed in the LERG.

E-UDIT is available in DS1, DS3, OC-3, OC-12, OC-48, and OC-192. Where Qwest facilities exist to carry the desired bandwidth and must be jointly engineered with

Qwest. The CLEC will provide required terminating equipment at its wire center or the IXC POP. Qwest will provide terminating equipment at its serving wire center and the transmission media to the interface at the CLEC wire center or IXC POP. One end of the E-UDIT must terminate in the Qwest serving wire center. The CLEC must have collocation in the Qwest serving wire center and have requested termination capacity through the collocation process.

All other procedures and appropriate termination information (e.g., CFA) and NC/NCI codes (Network Channel Codes/Network Channel Interface Codes) remain the same as a UDIT-IOF. The E-UDIT is identical to the UDIT-IOF in provisioning specifications.

2.2.3 Split UDIT: S-UDIT

Split-UDIT (S-UDIT) enables a CLEC to order a UDIT from their collocation in a Qwest wire center to the collocation of a different CLEC in a different Qwest wire center in the same LATA and state. Both the originating and terminating locations must have CLEC collocation established along with proper ICDF terminations, e.g., DS0, DS1, DS3, OCnetc.

All other procedures and appropriate termination information (e.g., CFA) and NC/NCI codes (Network Channel Codes/Network Channel Interface Codes) remain the same as a UDIT. The S-UDIT is identical to the UDIT in specifications.

2.2.4 Meet Point UDIT: M-UDIT

Meet Point-UDIT (M-UDIT) provide a dedicated transmission path between a Qwest wire center and a mutually agreed meet point with another ILEC not in Qwest territory. The CLEC must be collocated in a Qwest wire center and have requested termination capacity through the collocation process. Qwest provides the interoffice facility up to the meet point. It is the CLEC's responsibility to design from the DSX to the demarcation point.

2.3 Multiplexing Associated with UDIT

2.3.1 General Description

Figure 2-2 illustrates the basic multiplexing arrangement. The multiplexing functionality consists of one high-level channel and several ("n") low-level channels.

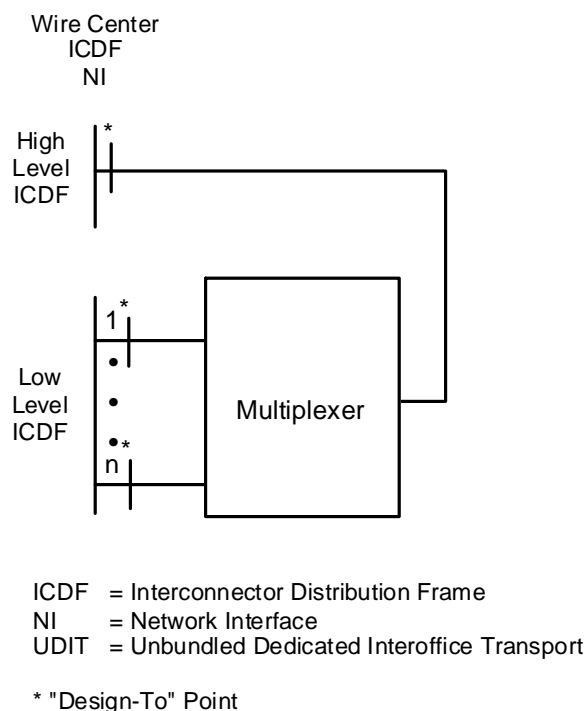


Figure 2-2: UDIT Multiplexing Arrangement

The value of “n” in the figure depends on the type of multiplexing. DS3 Multiplexing, for example, has 28 low-level channels. In this example, the “High Level” would be DS3 and the “Low Level” would be DS1. Each channel must be terminated on the appropriate ICDF.

2.3.2 High-Side Channel

The DS1 or DS3 high side channel is the connection between the central office multiplexing functionality and a DS1 or DS3 termination at the CLEC’s collocation in the same wire center.

The Network Channel codes are used to describe the arrangement. Network Channel Interface (NCI) codes apply at the high-level ICDF.

2.3.3 Low-Side Channel

The DS1 or DS0 low side channels are the connections between the central office multiplexing functionality and the DS1 or DS0 terminations at the CLEC’s collocation in the same wire center.

One other major difference between the unbundled multiplexing and Qwest finished services that include multiplexing is that the CLEC will select the proper lower-level plugs and set their options. This is done by the use of proper Network Channel codes and NCI codes. This selection and option setting process is required to allow the multiplexing to properly work with the facilities and equipment to which the CLEC connects to the ends of the low side channels.

Subsequent chapters in this publication will provide generic information about the available low-level plugs, their technical parameters and their options.

2.4 UDIT Element Applications

A CLEC may use UDIT channels and multiplexing by connecting them together and/or to the CLEC's Interconnector Designated Equipment. The CLEC may be also connect these UDIT channels to other UNEs or Finished Services purchased from Qwest. The overall design of any network formed by these connections is the responsibility of the CLEC. The CLEC also has the responsibility to design the connections and use these UNEs in a manner consistent with this and other appropriate technical publications.

2.5 “Design-To” Points and Interconnection Arrangements

PUB 77386 identifies the ICDF and the Dedicated ICDF Interconnection arrangements. The ICDF is the NI of the UDIT. See PUB 77386 for further information.

Figures 2-1 and 2-2 include a “Design-To” point. The “Design-To” point is a cross-connect frame (or the functional equivalent) in the Qwest wire center. This cross-connect frame, for example, will be a DSX-1 or DSX-3 cross-connect frame for DS1 or DS3 UDIT UNEs respectively. **The “Design-To” cross-connect frame and the ICDF NI are frequently the same frame.**

This issue is being raised in this publication to make the distinction when the two frames are not the same. That is, the ICDF at the NI may not be a DSX-1 or DSX-3 frame for DS1 or DS3 UDITs respectively. This difference may impact how the CLEC designs their end-to-end services.

The CLEC must order ICDF terminations prior to ordering any UDITs!

Further details on the ICDFs, tie cable pairs, “Design-To” points and responsibilities may be found in PUB 77386.

2.6 Connections with Other Local Exchange Carriers (LECs) using M-UDIT

Qwest has agreements with other LECs to meet these LECs at a “Meet Point” for the purpose of exchanging services. These agreements are called a “Meet Point Agreement.”

An M-UDIT may be ordered between a Qwest and another LEC’s wire center as long as a Meet Point Agreement exists between the two wire centers. The specifications of the portion of the M-UDIT on the other LEC’s side of the Meet Point and the NI of the M-UDIT in the other LEC’s wire center will be provided as specified by the other LEC. The specifications in this publication do not apply to the portion of the M-UDIT beyond the Meet Point.

Acceptable NCI codes for M-UDIT at the NI in the other LEC’s wire center will be specified by the other LEC. Other chapters in this publication assume that both wire centers belong to Qwest and may not recognize this distinction. The CLEC may have to make separate arrangements with both Qwest and the other LEC to meet the CLEC’s requirements.

Meet Point UDITs are available at DS1, DS3, and OC-n levels if **both** the Meet Point Agreement **and** facilities are available. The CLEC should be aware that the Meet Point Agreements are specific as to pairs of wire centers and to services offered. Refer to the NECA #4 tariff for specific information on Meet Point Agreements.

2.7 Synchronization

UDIT is synchronized by an external clock source in accordance with the Building Integrated Timing Supply concept unless otherwise requested by the CLEC, using NC/NCI codes provided in Chapter 3. See PUB 77386 for further information.

2.8 Testing

UDIT s will be tested and will perform according to industry Standards. Digital Services will conform to ANSI Standards T1.514, *Network Performance Parameters for Dedicated Digital Services - SONET Bit Rates*, T1.510, *Network Performance Parameters for Dedicated Digital Services - Specifications* or T1.410, *Carrier-to-Customer Metallic Interface - Digital Data at 64 kbit/s and Subrates*. This includes error and availability performance. Analog interfaced circuits will conform and be tested to the parameters and objectives of Telcordia document, TR-NWT-000335, *Voice Grade Special Access Services - Transmission Parameter Limits and Interface Combinations*.

CONTENTS

| Chapter and Section | Page |
|--|-------------|
| 3. Network Channel/Network Channel Interface Codes | 3-1 |
| 3.1 Network Channel (NC) Codes | 3-1 |
| 3.1.1 General | 3-1 |
| 3.1.2 Format..... | 3-1 |
| 3.2 Network Channel Interface (NCI) Codes..... | 3-2 |
| 3.2.1 General | 3-2 |
| 3.2.2 Format..... | 3-2 |
| 3.3 Application of NC and NCI Codes..... | 3-5 |
| 3.4 NC and NCI Codes for Jumpers..... | 3-6 |

Figures

| | | |
|-----|--|-----|
| 3-1 | Format Structure for NC Codes | 3-1 |
| 3-2 | Format Structure for NCI Codes..... | 3-2 |
| 3-3 | Code Application -- Two-Point Element | 3-5 |
| 3-4 | Code Application -- Multiplexer Element..... | 3-5 |

Tables

| | | |
|-----|---|-----|
| 3-1 | NCI Impedance Values..... | 3-3 |
| 3-2 | NCI Transmission Levels..... | 3-4 |
| 3-3 | NC and NCI Codes for Ordering Jumpers | 3-6 |
| 3-4 | NC Code Definitions for Jumpers..... | 3-7 |
| 3-5 | NCI Code Definitions for Jumpers | 3-7 |

3. Network Channel/Network Channel Interface Codes

3.1 Network Channel (NC) Codes

3.1.1 General

Network Channel (NC) codes are a part of the Telcordia COMMON LANGUAGE[®] code set. The NC code is used to identify a channel used with the service.

3.1.2 Format

A NC code is a four-character code with two data elements:

Channel Code
Optional Feature Code

The format is illustrated in Figure 3-1.

| Network Channel Code | | | |
|----------------------|--------------|---|-----------------------|
| Data Element | Channel Code | | Optional Feature Code |
| Character Position | 1 | 2 | 3 4 |
| Character Key | X | X | X or - X or - |

X = Alphanumeric
- = Hyphen

Figure 3-1: Format Structure for NC Codes

The **Channel Code** (character positions 1 and 2) is a two-character alpha or alphanumeric code that describes the channel service in an abbreviated form. The channel code will frequently, but not always, be specified as the service code of the special service circuits or the transmission grade of the message trunk circuit. The NC channel code field is always filled.

The **Optional Feature Code** (character positions 3 and 4) is a two-character alpha or alphanumeric or hyphen code that represents the option codes available for each channel code. Varying combinations of this code will allow the customer to enhance the technical performance of the requested channel, or to further identify the type of service. It is also used to specify options such as conditioning, effective 4-wire, multiplexing, etc. The NC optional code field is always filled.

Further information about NC Codes may be found in ANSI T1.223-1997, *Information Interchange — Structure and Representation of Network Channel (NC) and Network Channel Interface (NCI) Codes for the North American Telecommunications System*.

3.2 Network Channel Interface (NCI) Codes

3.2.1 General

Network Channel Interface (NCI) codes are a part of the COMMON LANGUAGE® code set. The NCI code is used to identify a network interface of a service in our mechanized systems.

3.2.2 Format

An NCI code is a maximum twelve-character code that consists of five (5) data elements:

Total Conductors
Protocol
Impedance
Protocol Options
Transmission Level Point(s) (TLP)

The first three fields are required. The last two are optional. The format is illustrated in Figure 3-2.

Network Channel Interface Code

| Total Conductors | | Protocol | | I m p e d a n c e | D e l i m e t e r | Protocol Options | | | D e l i m i t e r | TLP Level | |
|------------------|---|----------|---|---|---|------------------|---|---|---|--------------------------------------|---------------------------------|
| | | | | | | | | | | T r a n s m i t | R e c e i v e |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| N | N | A | A | X | • | X | X | X | • | X or - | X or - |

A = Alpha
N = Numeric
X = Alphanumeric
• = Delimiter (normally a period)
- = Hyphen

Figure 3-2: Format Structure for NCI Codes

Total Conductors (character positions 1 and 2) is a two-character numeric code that represents the total number of physical conductors (e.g., wires or fibers) required at the interface.

Protocol (character position 3 and 4) is a two-character alpha code that defines requirements for the interface regarding signaling/transmission.

Impedance (character position 5) is a one-character alpha or numeric code representing the nominal reference impedance that will terminate the channel for the purpose of evaluating transmission performance. Values are listed in Table 3-1.

Table 3-1: NCI Impedance Values

| Impedance in Ohms (Character Position 5) | | | |
|---|------|------------|------|
| Data Value | Code | Data Value | Code |
| 600 | 2 | 75 | 6 |
| 900 | 3 | 100 | 9 |
| 135 | 5 | Fiber | F |

Protocol Options (character positions 7, 8, and 9) is a one to three-character alpha, numeric, or alphanumeric code that describes additional features (e.g., bit rate or bandwidth) on the Protocol to be used. It is an optional field that is always left justified.

Transmission Level Point(s) (character positions 8 through 12) is assigned a one or two-character alpha code corresponding to a value for Transmission Level Point(s) (TLPs) from either the Exchange Carrier/service provider or customer end. Values are listed in Table 3-2.

The convention for TLP Levels is as follows:

- Transmitting TLP Level signifies the TLP transmit signal level at the Qwest interface when transmitting to the customer.
- Receiving TLP Level signifies the TLP transmit signal level at the Qwest interface when receiving from the customer.

Further information about NCI Codes may be found in ANSI T1.223-1991.

Table 3-2: NCI Transmission Levels

| Transmission Level Point Code (Character Positions 11 and 12) | |
|--|------|
| Data Value | Code |
| -16.0 | A |
| -15.0 | B |
| -14.0 | C |
| -13.0 | D |
| -12.0 | E |
| -11.0 | F |
| -10.0 | G |
| -9.0 | H |
| Fractional TLPs | I |
| -8.0 | J |
| -7.0 | K |
| -6.0 | L |
| -5.0 | M |
| -4.0 | N |
| -3.0 | P |
| -2.0 | Q |
| -1.0 | R |
| 0.0 | S |
| +1.0 | T |
| +2.0 | U |
| +3.0 | V |
| +4.0 | W |
| +5.0 | X |
| +6.0 | Y |
| +7.0 | Z |
| Qwest Specified | - |

3.3 Application of NC and NCI Codes

Figures 3-3 and 3-4 illustrate the application of NC and NCI codes for the Unbundled Dedicated Interoffice Transport two-point and multiplex elements respectively.

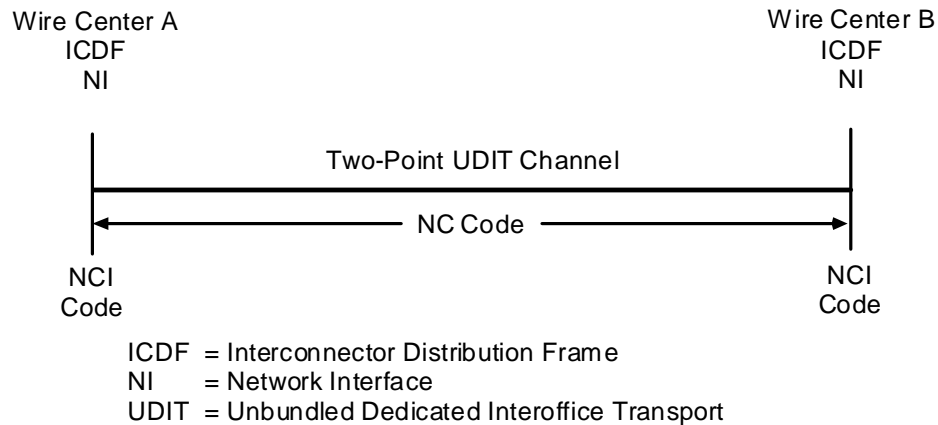


Figure 3-3: Code Application -- Two-Point Element

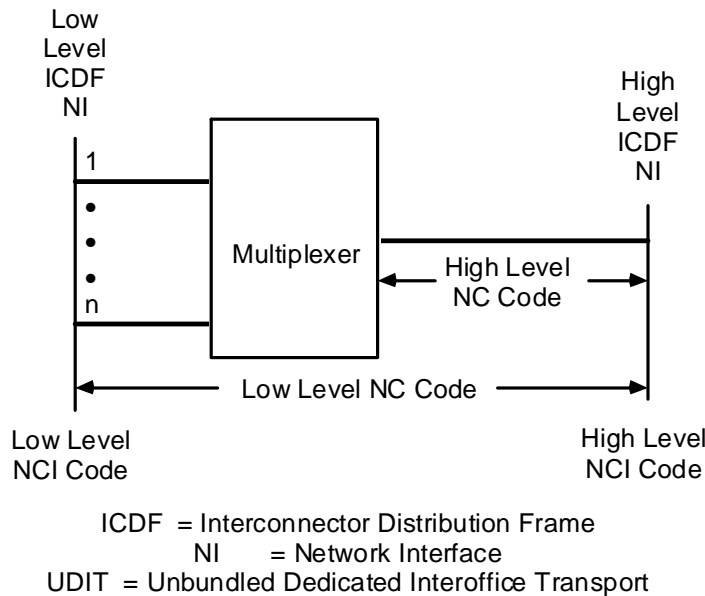


Figure 3-4: Code Application -- Multiplexer Associated with UDIT

3.4 NC and NCI Codes for Jumpers

Under certain circumstances, an Interconnector may have to order jumpers from Qwest. This may be due to contracts, regulatory orders or other circumstances.

These jumpers are connections on a cross-connect frame. These jumpers may be used to connect collocated equipment to Unbundled Network Elements (UNEs), collocated equipment to collocated equipment, UNEs to UNEs or other situations described elsewhere in this publication. Subsequent chapters should be consulted for further information about specific situations.

Unless otherwise stated, the NC and NCI codes listed in Table 3-3 should be used. Tables 3-4 and 3-5 define these NC and NCI codes respectively.

Table 3-3: NC and NCI Codes for Ordering Jumpers

| Application | Description | NC Code | NCI Code |
|--------------------|--------------------------|---------|-----------|
| DS0/Voice - HDSL * | HDSL | LX-- | 02QB9.00H |
| DS0/Voice - Other | 64 kbit/s or voice | LX-- | 02QB2.00 |
| DS1 | SF & AMI | HCX- | 04QB9.11 |
| | SF & B8ZS | HCXA | |
| | Non-ANSI ESF & AMI | HCXB | |
| | Non-ANSI ESF & B8ZS | HCXC | |
| | ANSI ESF & AMI | HCXD | |
| | ANSI ESF & B8ZS | HCXE | |
| | Free Framing & B8ZS | HCXF | |
| DS3 | 44.736 Mbit/s | HFX- | 04QB6.33 |
| Fiber or Optical | Fiber Jumper for optical | LX-- | 01QBF.LLX |

* High-bit-rate Digital Subscriber Line.

AMI = Alternate Mark Inversion

ANSI = American National Standards Institute

B8ZS = Bipolar with 8 Zero Substitution

ESF = Extended Super Frame

SF = Superframe Format

Table 3-4: NC Code Definitions for Jumpers

| NC Code | | | Description |
|---------|---|---|---|
| LX | - | - | Dedicated Facility (Without Equipment) |
| HC | | | High Capacity Channel (DS1) |
| | X | | Central Office Cross-Connect, DS1-to-DS1 Intact |
| | | * | * Fourth position defines line code and frame format as shown in Table 6-3. |
| HF | | | High Capacity Channel (DS3) |
| | X | | Central Office Cross-Connect |
| | | - | DS3-to-DS3 |

Table 3-5: NCI Code Definitions for Jumpers

| NCI Code | | | | | Description |
|----------|----|---|----|---|---|
| 01 | | | | | One Conductor |
| 02 | | | | | Two Conductors |
| 04 | | | | | Four Conductors |
| | QB | | | | Manual Cross-Connect Termination With No Subrating Capability |
| | | 2 | | | 600 Ohms |
| | | 6 | | | 75 Ohms |
| | | 9 | | | 100 Ohms |
| | | F | | | Fiber |
| | | | 00 | | Main Distribution Frame Cross-Connect * |
| | | | | H | HDSL |
| | | | 11 | | DS1-to-DS1 (This code may or may not meet DS1 signal levels as specified by GR-342-CORE.) |
| | | | 33 | | DS3-to-DS3 (This code may or may not meet DS1 signal levels as specified by GR-342-CORE.) |
| | | | LL | | Fiber Cross-Connect on Fiber Distribution Bay (or equivalent) |
| | | | | X | Dark Fiber |

* Also applies to other DS0 or Voice cross-connect frames including Intermediate Distribution Frame (IDF) and Common System Main Interconnecting Frame (COSMIC®).

CONTENTS

| Chapter and Section | Page |
|---|-------------|
| 4. DS3 Unbundled Dedicated Interoffice Transport (UDIT) | 4-1 |
| 4.1 Unbundled Network Element (UNE) Description | 4-1 |
| 4.2 Network Interfaces and Network Channel Interface (NCI) Codes... | 4-1 |
| 4.3 Network Channel (NC) Codes | 4-2 |
| 4.4 DS3 Two-Point UDIT UNE | 4-3 |
| 4.5 DS3 UDIT Multiplexer UNE..... | 4-4 |
| 4.6 Valid NC and NCI Code Combinations..... | 4-5 |
| 4.7 DS1 Low-Level Channels and Options | 4-6 |

Figures

| | |
|--|-----|
| 4-1 Typical DS3 Two-Point UDIT UNE..... | 4-4 |
| 4-2 Typical DS3 Unbundled Multiplexing | 4-5 |

Tables

| | |
|--|-----|
| 4-1 Applicable DS3 Network Channel Interface Codes -- DS3 UDIT | 4-1 |
| 4-2 Applicable DS3 Network Channel Codes -- DS3 UDIT | 4-3 |
| 4-3 Applicable DS1 Level Codes -- DS3 UDIT Multiplexer..... | 4-6 |

4. DS3 Unbundled Dedicated Interoffice Transport (UDIT)

4.1 Unbundled Network Element (UNE) Description

Unbundled Dedicated Interoffice Transport (UDIT) at the DS3 level provides a two-point DS3 (44.736 Mbit/s) channel between two Qwest wire centers. The Network Interface (NI) is at the DS3 InterConnection Distribution Frame (ICDF) cross-connect frame.

DS3-to-DS1 multiplexing associated with UDIT is available. Several options of signal format are available and are summarized in this chapter.

Full technical information about this DS3 transport service may be found in PUB 77324, *Qwest DS3 Service*. Information about the ICDF may be found in PUB 77386.

4.2 Network Interfaces and Network Channel Interface (NCI) Codes

Network Channel (NC) and Network Channel Interface (NCI) codes are used to define the channels and NIs of the DS3 UDIT. These codes are used to describe and order UDIT. Information about applicable NC codes will be found in following sections.

Table 4-1 lists the applicable DS3 level NCI codes for the DS3 UDIT. The “QB” Protocol Code denotes a Manual Cross-Connect termination with no subrating capability. The options “33” denote a DS3-to-DS3 cross-connect (which may or may not meet DS3 templated signal levels).

Table 4-1: Applicable DS3 Network Channel Interface Codes -- DS3 UDIT

| Description | NI (ICDF) | “Design-To” Point |
|---|-----------|----------------------|
| DS3 with M2/3 Multiplexer format | 04QB6.33 | 04DS6.44 |
| DS3 Unchannelized with M Framed format | 04QB6.33 | 04DS6.44R |
| DS3 with M2/3 Multiplexer format & C-Bit Parity | 04QB6.33 | 04DS6.44I |
| DS3 Unchannelized and C-Bit Parity | 04QB6.33 | 04DS6.44A |

The DS3 UDIT would also involve a “Design-To” Point as described in PUB 77386. This means that there is a DSX-3 on the network side of the NI (i.e., the ICDF). The “Design-To” Point is not a NI, but is a cross-connect frame requiring a templated DS3 signal that must be recognized when designing the DS3 connections.

The “Design-To Point may be the same frame as the ICDF. This will impact the CLEC’s design for the DS3.

The “DS” Protocol Code denotes a Digital Hierarchy Interface and the options (“44”, “44A” and “44I”) indicate the descriptive information in the table.

Some wire centers may use an Electronic DSX (EDSX) or a Digital Cross-Connect System (DCS) in place of the manual DSX.











4.3 Network Channel (NC) Codes

Table 4-2 lists the applicable Network Channel Codes for the DS3 two-point UDIT and 3/1 multiplexing associated with UDIT. The applications are illustrated in the right column.

The third position “C” denotes C-Bit Parity. C-Bit Parity is not available in all locations. “M13” denotes the DS3-to-DS1 multiplexer.

Most new-vintage multiplexers can designate the need for B8ZS on a channel-by-channel basis (i.e., HFZM or HFC1). Depending on the multiplexing options specified in the NC codes which are provided by the CLEC, Qwest may substitute these newer multiplexers for the older “by-four”, “by-seven” or unspecified types (i.e., HF-4, HFC4, HF-7, HFC7, HF-M or HFCM) since they are compatible. However, the reverse (i.e., old-for-new) substitutions are not compatible and will not be made.

Table 4-2: Applicable DS3 Network Channel Codes -- DS3 UDIT

| NC Code | Description | Options | Illustration |
|---------|---|--|---|
| HF-- | DS3, M2/3 Multiplex Format | None * |  |
| HFZM | | Central Office Multiplexing, Multiplexer can be optioned for one (1) DS1 Clear Channel at a time using B8ZS line code |  |
| HF-4 | | Central Office Multiplexing, Multiplexer can be optioned for four (4) DS1 Clear Channels at a time using B8ZS line code |  |
| HF-7 | | Central Office Multiplexing, Multiplexer can be optioned for seven (7) DS1 Clear Channels at a time using B8ZS line code |  |
| HF-M | | Central Office Multiplexing (DS1 Clear Channel Capability optioning capability not specified) |  |
| HFC- | DS3, M2/3 Multiplex Format, C-Bit Parity | None * |  |
| HFCM | | Central Office Multiplexing (DS1 Clear Channel Capability optioning capability not specified) |  |
| HFC1 | | Central Office Multiplexing, Multiplexer can be optioned for one (1) DS1 Clear Channel at a time using B8ZS line code |  |
| HFC4 | | Central Office Multiplexing, Multiplexer can be optioned for four (4) DS1 Clear Channels at a time using B8ZS line code |  |
| HFC7 | | Central Office Multiplexing, Multiplexer can be optioned for seven (7) DS1 Clear Channels at a time using B8ZS line code |  |

* M2/3 Format is optional.

4.4 DS3 Point-to-Point UDIT

Figure 4-1 illustrates a typical point-to-point DS3 UDIT between Wire Center A and Wire Center B. The NC codes, described in Section 4.3, indicate that the DS3 channel is M-Framed with optional M2/3 Multiplexer format and C-Bit Parity. The NCI codes are described in Table 4-1. The asterisks (*) show the “Design-To” Points.

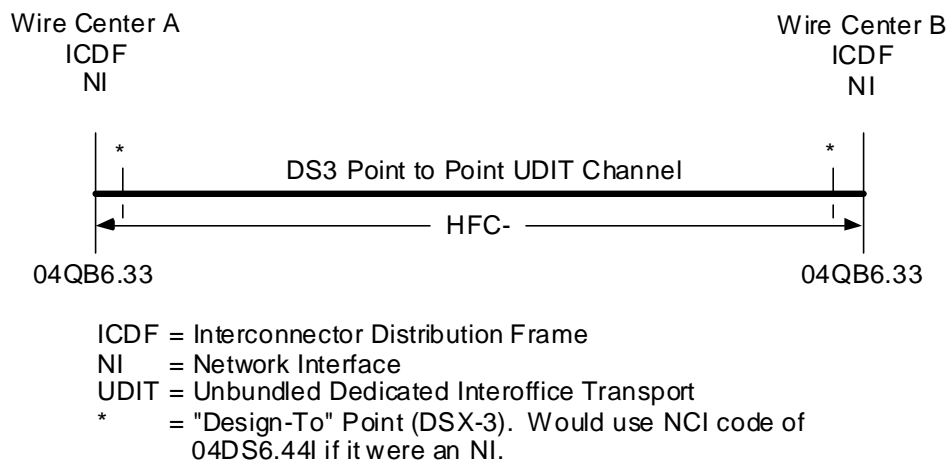



Figure 4-1: Typical DS3 Point-to-Point UDIT

4.5 DS3 Unbundled Multiplexing

Figure 4-2 illustrates an example of DS3 multiplexing associated with UDIT. The high capacity channel with multiplexing is M-Framed with M2/3 Multiplexer format and C-Bit Parity. Table 4-2 should be referenced for available multiplexing options. The NCI codes are described in Table 4-1. And the asterisks (*) shown in the figure represent the "Design-To" Points.

The NC and NCI codes associated with the DS1 Low side signals in the example in Figure 4-2 are described in Chapter 5.

The design rules described in Section 4.2 for DS3 apply to the DS3 channel. Similar design rules apply for the DS1 low-level channels. For example, when the cross-connect at the "Design-To" Point is a DSX-1 the total length limitation must be considered (i.e. DSX-1 to CLEC's equipment is 655 feet or less depending on cable type).

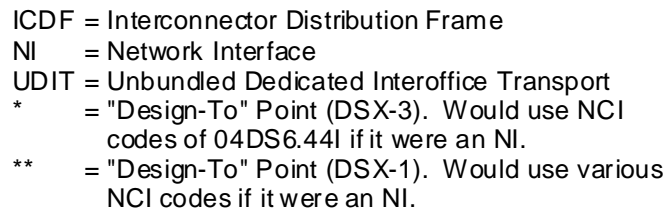

Note: Depending on the NC codes that are used by a CLEC, Qwest may substitute a 3/1 DCS for the M13 multiplexer in some wire centers. These 3/1 DCSs may not have all the same capabilities as a M13 multiplexer.

The 04QB6.33 NCI code is silent on the C-Bit Parity option. However, the NC code can be used to designate C-Bit Parity.

4.7 DS1 Low-Side Channels and Options

Table 4-3 lists the DS1 low-side NC and NCI codes for the DS3 multiplexing. Codes in the same row are compatible.

Table 4-3: Applicable DS1 Low side Codes -- DS3 Multiplexing

| Line Code and Frame Format | NCI Codes | Network Channel Codes |
|-------------------------------|--------------|--------------------------|
| | (NI at ICDF) | |
| SF & AMI | 04QB9.11 | HC-- |
| ANSI ESF & AMI | 04QB9.11 | HCD- |
| ANSI ESF & B8ZS | 04QB9.11 | HCE- |
| Non-ANSI ESF & AMI | 04QB9.11 | HCF- |
| Non-ANSI ESF & B8ZS | 04QB9.11 | HCG- |
| Free Framing and B8ZS | 04QB9.11 | HCJ- |
| SF & B8ZS | 04QB9.11 | HCZ- |

More information including NC codes and descriptions about the DS1 low-side channels may be found in Chapter 5. Only two-point DS1 NC codes would be valid for this application.

CONTENTS

| Chapter and Section | Page |
|--|-------------|
| 5. DS1 Unbundled Dedicated Interoffice Transport | 5-1 |
| 5.1 Unbundled Network Element (UNE) Description..... | 5-1 |
| 5.2 Network Channel (NC) and Network Channel Interface (NCI) Codes..... | 5-1 |
| 5.3 DS1 Level Network Channel (NC) Codes..... | 5-2 |
| 5.4 DS1 Two-Point UDIT UNE..... | 5-3 |
| 5.5 DS1 Unbundled Multiplexing..... | 5-3 |
| 5.6 Valid DS1 NC and NCI Code Combinations..... | 5-5 |
| 5.7 DS0/Voice Level Channels..... | 5-5 |
| 5.7.1 Analog Voice Channels..... | 5-5 |
| 5.7.2 Digital Data Channels..... | 5-7 |
| 5.7.3 Basic Rate ISDN Channels..... | 5-10 |
| 5.8 Application Example..... | 5-10 |
| 5.9 Generic Channel Unit Descriptions..... | 5-11 |
| 5.9.1 Foreign Exchange (2FXOG, 2FXSG) | 5-12 |
| 5.9.2 Transmission Only (ETO2G, ETO4) | 5-13 |
| 5.9.3 Dial Pulse (DPO, DPTG) | 5-14 |
| 5.9.4 Office Channel Unit-Data Port (OCU-DP) | 5-15 |
| 5.9.5 Digital Signal Level Zero-Data Port (DS0-DP)..... | 5-16 |
| 5.9.6 ISDN “U” Interface Channel Unit | 5-17 |
| 5.10 Application Example -- Continued..... | 5-19 |

Figures

| | |
|--|------|
| 5-1 Typical DS1 Two-Point UDIT UNE..... | 5-3 |
| 5-2 Typical DS1 Unbundled Multiplexing..... | 5-4 |
| 5-3 DS1 UDIT Example Configuration..... | 5-12 |
| 5-4 Worst Case ISDN Basic Access Configuration | 5-18 |

CONTENTS (Continued)

| Tables | Page |
|---|-------------|
| 5-1 Applicable DS1 Network Channel Interface Codes -- DS1 UDIT..... | 5-1 |
| 5-2 Applicable DS1 Level Network Channel Codes -- DS1 UDIT..... | 5-2 |
| 5-3 Transmission Level Point Limits | 5-5 |
| 5-4 Analog Channel Applications..... | 5-6 |
| 5-5 Digital Data Channel Applications..... | 5-9 |
| 5-6 Basic Rate ISDN Channel Applications..... | 5-10 |
| 5-7 DS1 UDIT Example Low Level (DS0) Circuits | 5-11 |
| 5-8 Typical FXOG/FXSG Channel Unit Options..... | 5-13 |
| 5-9 Typical ETO2G Channel Unit Options..... | 5-14 |
| 5-10 Typical ETO4 Channel Unit Options..... | 5-14 |
| 5-11 Typical DPO/DPTG Channel Unit Options..... | 5-15 |
| 5-12 Typical OCU-DP Channel Unit Options | 5-16 |
| 5-13 Typical DS0-DP Channel Unit Options..... | 5-17 |
| 5-14 Typical ISDN “U” Interface Channel Unit Options..... | 5-18 |

5. DS1 Unbundled Dedicated Interoffice Transport

5.1 Unbundled Network Element (UNE) Description

Unbundled Dedicated Interoffice Transport (UDIT) at the DS1 level provides a two-point DS1 (1.544 Mbit/s) channel between two Qwest wire centers. The Network Interface (NI) is the InterConnection Distribution Frame (ICDF).

DS1-to-DS0/Voice multiplexing is also available. Several options of signal format are available and are summarized in this chapter.

Information about the ICDF and the “Design-To” Point may be found in PUB 77386. Full technical information about the DS1 “Design-To” point may be found in PUB 77375, *1.544 Mbit/s Channel Interfaces*.

Some further descriptive information about the DS1 level channels may be found in PUB 77200, *Qwest DS1 Service and Synchronization Service*. Although PUB 77200 describes the Qwest DS1 Service and not UDIT, information about the Network Channel (NC) codes and related technical information would apply.

5.2 Network Channel (NC) and Network Channel Interface (NCI) Codes

NC and NCI codes are used to define the channels and the NIs of the DS1 UDIT respectively. These codes are used to describe and order UDIT. Information about applicable NC codes will be found in succeeding sections.

Table 5-1 lists the applicable NCI codes for the DS1 UDIT.

Table 5-1 Applicable DS1 Network Channel Interface Codes -- DS1 UDIT

| Line Code and Frame Format | Network Interface (ICDF) | “Design-To” Point |
|----------------------------|--------------------------|-------------------|
| SF & AMI | 04QB9.11 | 04DS9.15 |
| ANSI ESF & AMI | 04QB9.11 | 04DS9.1K |
| ANSI ESF & B8ZS | 04QB9.11 | 04DS9.1S |
| Non-ANSI ESF & AMI | 04QB9.11 | 04DS9.15K |
| Non-ANSI ESF & B8ZS | 04QB9.11 | 04DS9.15S |
| Free Framing and B8ZS | 04QB9.11 | 04DS9.15J |
| SF & B8ZS | 04QB9.11 | 04DS9.15B |

The DS1 UDIT requires a “Design-To” Point as described in PUB 77386.

The “Design-To Point may be the same frame as the ICDF. This will simplify the CLEC’s DS1 design.



The “DS” Protocol Code denotes a Digital Hierarchy Interface and the options (“15”, “1K”, etc.) indicate the descriptive information in the table.

The “QB” Protocol Code denotes a Manual Cross-Connect termination with no subrating capability. The options “11” denote a DS1-to-DS1 cross-connect (which may or may not meet DS1 templated signal levels). An appropriate NC code needs to be used in order to select the desired frame format and line code.

5.3 DS1 Level Network Channel (NC) Codes

Table 5-2 lists the applicable Network Channel Codes for the DS1 UDIT. The illustrations in the table represent the variations.

Table 5-2 Applicable DS1 Level Network Channel Codes -- DS1 UDIT

| Line Code & Frame Format | Two-Point | UDIT Multiplexer |
|-----------------------------|---|---|
| |  |  |
| SF & AMI | HC-- | HC-G |
| ANSI ESF & AMI | HCD- | HCDG |
| ANSI ESF & B8ZS | HCE- | HCEG |
| Non-ANSI ESF & AMI | HCF- | HCFG |
| Non-ANSI ESF & B8ZS | HCG- | HCGG |
| Free Framing and B8ZS | HCJ- | NA * |
| SF & B8ZS | HCZ- | HCZG |

* Unbundled Multiplexing is not available for the free framing frame format.

Customers ordering Free Framed DS1 must be aware that performance messages, such as Cyclic Redundancy Check (CRC), Slips, Loss of Frame and Out of Frame will not be visible to Qwest. Therefore, Qwest nor CLEC can monitor or collect the performance messages for maintenance purposes. All required testing on such circuits would be intrusive.

5.4 DS1 Two-Point UDIT

Figure 5-1 illustrates a typical two-point DS1 UDIT channel between Wire Center A and Wire Center B. The NC codes, described in Section 5.3, indicate that the DS1 channel is ANSI ESF and B8ZS. The NCI codes are described in Table 5-1. The asterisks (*) show the "Design-To" Points.

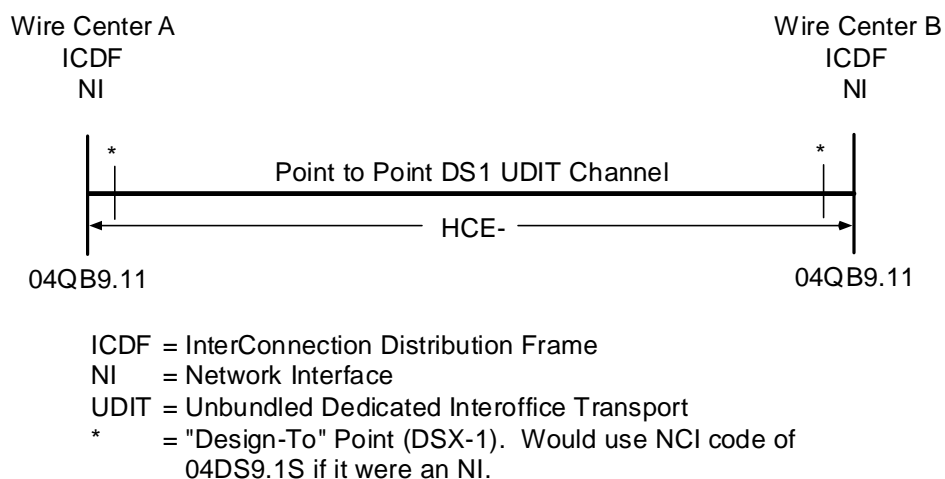


Figure 5-1 Typical DS1 Point to Point UDIT

5.5 DS1 Unbundled Multiplexing

Figure 5-2 illustrates DS1 Multiplexing. The high capacity channel with multiplexing is ANSI ESF and B8ZS. The NCI codes are described in Table 5-1. The asterisks (*) show the "Design-To" Points.

The design rules described in previous sections for DS1 apply to the DS1 channel. Similar design rules apply for the DS0 or voice low-side channels.

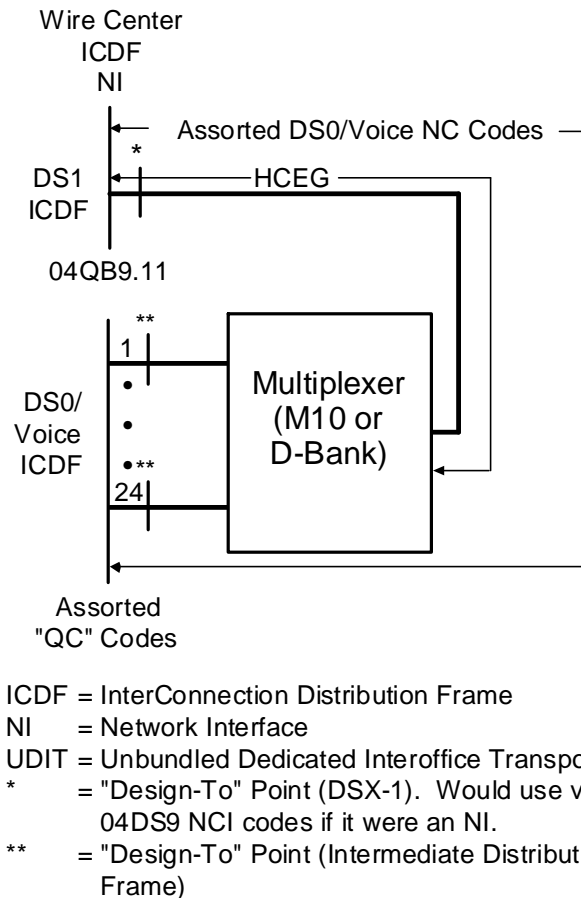


Figure 5-2 Typical DS1 Multiplexing associated with UDIT

For digital DS0 channels at a DS0-A interface, the difference is that the cross-connect at the "Design-To" Point may be a DSX-0 and the total length limitation from DSX-0 to CLEC's equipment is 1500 feet. The DSX-0 function may be located on an Intermediate Distribution Frame (IDF) or other frame rather than a separate DSX-0 cross-connect frame. However, the 1500-foot limitation still applies.

For analog voice channels, the “Design-To” point concept is not significant since the services being transported on the UDIT must be designed by the CLEC on an end-to-end basis. An IDF would be located at the “Design-To” point. See PUB 77386 for further information about analog interconnection.

The 24 channel DS1 Multiplexing will be a D4-type of channel bank commonly used in the industry. The bank will be externally synchronized to a source traceable to a Stratum I clock as discussed in PUB 77386.

5.6 Valid DS1 NC and NCI Code Combinations

DS1 Level NC and NCI codes listed with the same Description are compatible.

5.7 DS0/Voice Low Side Channels

An assortment of low side digital DS0 or analog voice channels may be ordered with the DS1 multiplexing. The information includes appropriate NC and NCI codes used to order and provide option settings for the channel units used for the low-side channels.. Further information on the channel units and their options may be found in Section 5.9.

5.7.1 Analog Voice Channels

This section contains design information to be used in designing a customer’s analog voice channels. The DS1 multiplexers make up a part of the voice channel. This information is to be used to select the channel units and their options.

Analog circuit design requires that the signal level into and out of metallic facilities fall within limits to avoid problems such as crosstalk. Table 5-3 lists the Transmission Level Point (TLP) limits. The CLEC must meet these limits when designing and selecting options for the channel units in the DS1 multiplexer.

Table 5-3 Transmission Level Point Limits

| Location | H88-Loaded Facilities | | Non-Loaded Facilities | |
|-----------------------------------|-----------------------------|------------------------------|-----------------------------|------------------------------|
| | Maximum Output To Line (dB) | Minimum Input From Line (dB) | Maximum Output To Line (dB) | Minimum Input From Line (dB) |
| At wire center | +6 | -9 | +6 | -15 |
| At PBX or other customer premises | +3 | -6 | +6 | -15 |

The D4-type of channel units used in the DS1 multiplexer use standard carrier levels of -8.5 dB transmit and +4.0 dB receive. Analog voice channels must be designed according to industry standards. Analog data channels, for example, should be designed 13 dB down from normal TLP levels. More detailed information about the channel units may be found in Section 5.9.

The requirements found in FCC Part 68 must also be met.

Table 5-4 lists the NC and NCI codes used to identify the analog channels. The table also lists the generic type of channel unit that will be provided with these NC/NCI combinations.

Table 5-4 Analog Channel Applications

| NC Code | Generic Channel Unit | Low Level NCI * | DESCRIPTION ** |
|---------|----------------------|------------------------|---|
| LD-- | 2FXOG | 02QC2.OOB 02QC3.OOB | Ground Start - Open End |
| LD-- | 2FXSG | 02QC2.OOC 02QC3.OOC | Ground Start - Closed End |
| LC-- | 2FXOG | 02QC2.OOD 02QC3.OOD | Loop Start - Open End |
| LC-- | 2FXSG | 02QC2.OOE 02QC3.OOE | Loop Start - Closed End |
| LG-- | ETO2G | 02QC2.OOF 02QC3.OOF | Transmission Only - No Signaling, 2-wire |
| LG-- | ETO4 | 04QC2.OOF | Transmission Only - No Signaling, 4-wire |
| LD-- | DPO | 02QC3.RVO | Reverse Battery Originating: Loop closure provided by the Access Customer (AC) to the Access Provider (AP); Battery provided by AP to AC. *** |
| LD-- | DPTG | 02QC3.RVT | Reverse Battery Terminating: Loop closure provided by the AP to the AC; Battery Provided by AC to AP. *** |

* All 12 positions of the NCI code are required to specify the Transmission Level Point (TLP) levels. The DS1 level NCI code is 04QB9.11 for DS1 NI.

** QC is defined as: Manual cross-connect DS0/voice termination. The Description column provides additional options.

*** The Access Provider (AP) is Qwest. The Access Customer (AC) is CLEC (or their customer).

The following paragraph and figure have been moved to Chapter 6, DS0 Unbundled Dedicated Interoffice Tran

Additional information and details regarding the functioning and technical parameters of these channels can be found in Qwest Technical Publication 77310, *Private Line Voice Grade Analog Channels for Access Service*. Relevant information is related by identical Network Channel Codes. The majority of technical specifications are in Telcordia's TR-NPL-000335, *Voice Grade Special Access Services - Transmission Parameter Limits and Interface Combinations*. Particularly, test limits and NCI descriptions are in TR-NPL-000335.

5.7.2 Digital Data Channels

Two types of low-side channels are available for digital data type of channels. One, intended to feed a metallic loop, uses an OCU-DP channel unit. The other, intended to connect to other multiplexers in a back-to-back arrangement, uses a DS0-DP channel unit. Table 5-5 lists the digital data applications.

Central Office Synchronization, described in PUB 77386, must be purchased to successfully use DS0-DP channel unit connections. The DS1 multiplexer will always be synchronized by a Stratum I-traceable clock source. It is recommended that synchronization be used for connections to OCU-DP also to minimize synchronization problems involving the transmission of digital data channels.

The signal provided by the OCU-DP card is intended to provide a 04DU5 type of NI at the End-User location. The 04QC5 and other NCI codes are defined in PUB 77312, *Qwest Digital Data Service Technical Description*. QC is defined as: Manual cross-connect DS0/voice termination. The Description column provides additional options. The data rate of the channel is identified by both NC and NCI codes.

The channel can be ordered without error correction by replacing the fourth character of the NC code with an "X". For example, a two-point 56 kbit/s channel without error correction would be XH-X. Ordering the channel without an "X" leaves the situation ambiguous.

Table 5-5 Digital Data Channel Applications

| NC Code ** | Generic Channel Unit | Low Level NCI | Description/Application * |
|---------------|----------------------|---------------|---|
| XA-- | DS0-DP | 04QC5.OOJ | 2.4 kbit/s, DS0A Level signal |
| XA-- | OCU-DP | 04QB5.00 | 2.4 kbit/s, not DS0A Level signal |
| XAB- | DS0-DP | 04QC5.OOJ | 2.4 kbit/s, with secondary channel, DS0A Level signal |
| XAB- | OCU-DP | 04QB5.00 | 2.4 kbit/s, with secondary channel, not DS0A Level signal |
| XB-- | DS0-DP | 04QC5.OOK | 4.8 kbit/s, DS0A Level signal |
| XB-- | OCU-DP | 04QB5.00 | 4.8 kbit/s, not DS0A Level signal |
| XBB- | DS0-DP | 04QC5.OOK | 4.8 kbit/s, with secondary channel, DS0A Level signal |
| XBB- | OCU-DP | 04QB5.00 | 4.8 kbit/s, with secondary channel, not DS0A Level signal |
| XG-- | DS0-DP | 04QC5.OOL | 9.6 kbit/s, DS0A Level signal |
| XG-- | OCU-DP | 04QB5.00 | 9.6 kbit/s, not DS0A Level signal |
| XGB- | DS0-DP | 04QC5.OOL | 9.6 kbit/s, with secondary channel, DS0A Level signal |
| XGB- | OCU-DP | 04QB5.00 | 9.6 kbit/s, with secondary channel, not DS0A Level signal |
| XC-- | DS0-DP | 04QC5.OOM | 19.2 kbit/s, DS0A Level signal |
| XC-- | OCU-DP | 04QB5.00 | 19.2 kbit/s, not DS0A Level signal |
| XCB- | DS0-DP | 04QC5.OOM | 19.2 kbit/s, with secondary channel, DS0A Level signal |
| XCB- | OCU-DP | 04QB5.00 | 19.2 kbit/s, with secondary channel, not DS0A Level signal |
| XH-- | DS0-DP | 04QC5.OOP | 56.0 kbit/s, DS0A Level signal |
| XH-- | OCU-DP | 04QB5.00 | 56.0 kbit/s, not DS0A Level signal |
| XHB- | DS0-DP | 04QC5.OOP | 56.0 kbit/s, with secondary channel, DS0A Level signal |
| XHB- | OCU-DP | 04QB5.00 | 56.0 kbit/s, with secondary channel, not DS0A Level signal |
| XD-- | DS0-DP | 04QC5.OOQ | 64.0 kbit/s, DS0A Level signal |
| XD-- | OCU-DP | 04QB5.00 | 64.0 kbit/s, not DS0A Level signal |

* QC is defined as: Manual cross-connect DS0/voice termination. The Description column provides additional options

QB is defined as: Manual cross-connect termination with no subrating capability. The option "00" denotes an MDF or DSX-0-like cross-connect.

** These NC codes also available with an "X" in the fourth position. See text for further information.

Default settings (Section 5.9.4) are to use error correction below 56 kbit/s and not to use error correction at 56 kbit/s and above. This choice was made based on the requirement of a second DS0 channel in the multiplexer and any DS1 high side channel for the 56 and 64 kbit/s channels using error correction.

It is recommended that the fourth character “X” be used if error correction not desired. Otherwise, error correction will be installed per the default settings.

5.7.3 Basic Rate ISDN Channels

The Basic Rate ISDN (BRI) uses a channel unit that is designed to connect to a 2-wire non-loaded metallic loop and deliver a “U” interface at the customer interface. Table 5-6 lists the applicable NC and NCI codes.

BRI requires the use of three adjacent DS0 channels on the multiplexer and any DS1 transport channels to provide the 2B+D ISDN channel.

Table 5-6 Basic Rate ISDN Channel Applications

| NC Code | Channel Unit | Low Level NCI | DESCRIPTION |
|---------|--------------|---------------|--|
| AD-- | ISDN “U” | 02QC5.OOS | Basic Rate ISDN (Digital Subscriber Line - DSL), LT function presented to Service Provider |
| | | 02QC5.OOV | Basic Rate ISDN (Digital Subscriber Line - DSL), NT function presented to Service Provider |

5.8 Application Example

This section provides an example of an application and illustrates NC and NCI code usage. Information about the option settings for the channel units may be found in Section 5.10.

For example, a CLEC is physically collocated in two wire centers (“A” and “B”) and wants to purchase a DS1 UDIT between the two offices plus DS1 multiplexing in office A. Assume the DS1 high side channel and multiplexer are B8ZS with ANSI ESF. Also, Assume the channels listed in Table 5-7 are requested. Figure 5-4 illustrates the configurations. No jumpers or Interconnector Designated Equipment are shown. This example assumes a 2.0 dB loop and normal design criteria apply in appropriate cases.

5.9 Generic Channel Unit Descriptions

This section provides a generic description of the channel units available with DS1 multiplexing.

Table 5-7 DS1 UDIT Example Low Side (DS0) Circuits Associated with Multiplexing

| Channel Number | Circuit Type (To Connect to Low Side) | NC Code | NCI Codes | | Channel Unit |
|----------------|---|---------|-----------|------------|--------------|
| | | | Low (DS0) | High (DS1) | |
| 1 | POTs line, open end | LC-- | 02QC3.OOD | 04QB9.11 | 2FXOG |
| 2 | 56 Kbit/s DDS (non-DS0A) without error correction | XH-X | 04QB5.00 | 04QB9.11 | OCU-DP |
| 3 | Trunk w/ Reverse Battery Originating | LD-- | 02QC3.RVO | 04QB9.11 | DPO |
| 4 | Trunk - Ground Start, closed end | LD-- | 02QC3.OOC | 04QB9.11 | 2FXSG |
| 5 | 2-wire PL voice, no signaling | LG-- | 02QC3.OOF | 04QB9.11 | ETO2G |
| 6 | 4-wire PL voice, no signaling | LG-- | 04QC2.OOF | 04QB9.11 | ETO4 |
| 7 | POTs line, closed end (normal loop application) | LC-- | 02QC3.OOE | 04QB9.11 | 2FXSG |
| 8 | 9.6 kbit/s w/SC DDS | XGB- | 04QC5.OOL | 04QB9.11 | DS0-DP |
| 9-11 | Basic Rate ISDN Loop, LT function | AD-- | 02QC5.OOS | 04QB9.11 | ISDN "U" |
| 12-24 | Future growth | | | 04QB9.11 | |

This material may suggest applications but makes no claims as to suitability other than the functions listed. These channel units may be of several manufacturers and vintages, and are the units normally used by Qwest in the provisioning of their services.

Qwest will select an appropriate channel unit of the generic type indicated by the NC and NCI codes to fit the channel bank.

Default settings are listed for several options. The channel units will be installed with these default settings. The options may be changed at the direction of the CLEC.

(CLEC equipment not shown)

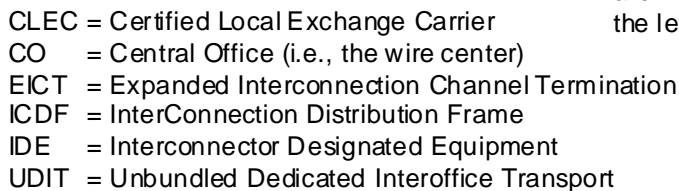


Figure 5-3 DS1 UDIT Example Configuration

5.9.1 Foreign Exchange (2FXOG, 2FXSG)

The 2-wire FXOG and FXSG channel units provide a connection between the D4-type channel unit and 2-wire circuits. The 2FXOG is for the office (open) end of a circuit. The 2FXSG is for the station (closed) end of a circuit. These units support both Loop Start and Ground Start signaling. Both channel units have Gain Transfer as indicated by the “G”.

Table 5-8 Lists the options available for the 2FXOG and 2FXSG channel units.

These channel units have an internal compromise balancing network of 600/900 ohms plus 1.15 μ f. In addition, an internal ground is provided to the make busy lead during trunk processing.

Table 5-8 Typical FXOG/FXSG Channel Unit Options

| Option * | Values | Option Setting Instruction Method |
|--------------------------------|--|--|
| Transmit & Receive Attenuators | 0 - 6.5 dB loss | Default values: Set FXSG for a 2-dB loop. Set FXOG for a 0.5 dB loop. Otherwise as indicated by CLEC. Values limited to range in Table 5-3 at wire center. |
| Network Buildout capacitor | 0.002 μ f 0.004 μ f 0.008 μ f 0.016 μ f 0.032 μ f 0.064 μ f | Default setting of 0.016 μ f unless otherwise instructed. Combinations of the values may be added up to a total value of 0.126 μ f. |
| Signaling | Loop or Ground Start | Based on positions 7 through 9 of NCI code. |
| 2-Wire Impedance | 600 or 900 | Based on position 5 of NCI code. |
| Loop length | < 600 ohms or > 600 ohms | Default is < 600 ohms. |
| Trunk Processing (GS only) | Trunk not busy after carrier failure Trunk busy after carrier failure | Default is busy during carrier failure. |

* Other options may exist.

5.9.2 Transmission Only (ETO2G, ETO4)

Transmission Only channel units provide a transmission path for analog channels and are both two and four-wire. Signaling, if required, is limited to in-band signaling.

The ETO2G is a unit for use with 2-wire connections. The ETO4 is a 600 ohm unit for use with 4-wire connections.

These channel units have an internal compromise balancing network of 600/900 ohms plus 1.15 μ f.

Tables 5-9 and 5-10 list the attenuation, gain, and loss parameters for the ETO2G and ETO4 channel units respectively.

Table 5-9 Typical ETO2G Channel Unit Options

| Option | Values | Option Setting Instruction Method |
|--------------------------------|---|---|
| Transmit & Receive Attenuators | 0 - 16.5 dB loss | Default values: Set for a 2 dB loop. Otherwise as indicated by CLEC. Values limited to range in Table 5-3 at wire center. |
| Network Buildout capacitor | 0.002 μ f 0.004 μ f 0.008 μ f 0.016 μ f 0.032 μ f 0.064 μ f | Default setting of 0.016 μ f unless otherwise instructed. Combinations of the values may be added up to a total value of 0.126 μ f. |
| Sealing Current | Sink or Source | Specified by CLEC. Default is Source (i.e., Qwest provides the sealing current). |
| 2-Wire Impedance | 600 or 900 | Based on position 5 of NCI code. |

Table 5-10 Typical ETO4 Channel Unit Options

| Option | Values | Option Setting Instruction Method |
|---|---|---|
| Transmit and Receive Attenuators and Gain | 0 - 24 dB Transmit 0 - 16.5 dB Receive | Default values: Set for a 2 dB loop. Otherwise as indicated by CLEC. Values limited to range in Table 5-3 at wire center. |
| Sealing Current | Sink Source Off | Default is Source (i.e., Qwest provides the sealing current). Otherwise, specified by CLEC. |

5.9.3 Dial Pulse (DPO, DPTG)

DPO and DPTG channel units are designed to work with metallic loops. These units use Reverse Battery signaling. The DPTG channel units may have Gain Transfer.

These channel units have an internal compromise balancing network of 600/900 ohms plus 1.15 μ f.

Table 5-11 lists the DPO/DPTG channel unit options.

Table 5-11 Typical DPO/DPTG Channel Unit Options

| Option | Values | Option Setting Instruction Method |
|--------------------------------|---|---|
| Transmit & Receive Attenuators | 0 - 6.3 dB loss | Default values: Set DPTG for a 2 dB loop. Set DPO for a 0.5 dB loop. Otherwise as indicated by CLEC. Values limited to range in Table 5-3 at wire center. |
| Network Buildout capacitor | 0.002 μ f 0.004 μ f 0.008 μ f 0.016 μ f 0.032 μ f 0.064 μ f | Default setting of 0.016 μ f unless otherwise instructed. Combinations of the values may be added up to a total value of 0.126 μ f. |
| 2-Wire Impedance | 600 or 900 | Based on position 5 of NCI code. |
| DPO Only | | |
| Signaling | Multifrequency Dial Pulse | Default is Multifrequency. The CLEC must specify if Dial Pulse is required. |
| Trunk Status During Failure | Trunk Busy (reverse battery) Trunk Not Busy (normal battery) | Default is Trunk Busy. |

5.9.4 Office Channel Unit-Data Port (OCU-DP)

Basic information and usage of OCU-DP channel units were discussed in Section 5.7.2. PUB 77312 contains some metallic loop design criteria used with Qwest's Digital Data Service. This information may aid the CLEC in designing their loop application for use with the OCU-DP.

Basically, a normal OCU-DP can be expected to work out to an actual measured loss (AML) of 34 dB at the Nyquist Frequency for distances measured from the OCU-DP out to the customer's Channel Service Unit/Data Service Unit (CSU/DSU).

These OCU-DP units also have an extended range capability for 56 and 64 kbit/s data rates, which can extend the loss beyond 34 dB. A capability of 40 dB AML can be expected although some manufacturer's products may exceed this value. The use of these OCU-DP units for loops over 40 dB AML should be considered permissive.

The OCU-DP channel units provided by Qwest treat both the transmit and the receive side in the extended range mode. Thus the End-User customer does not require a special CSU/DSU with special treatment on the receive side.

Table 5-12 lists the options normally available with OCU-DP channel units along with how they are specified.

Table 5-12 Typical OCU-DP Channel Unit Options

| Option | Values | Option Setting Instruction Method |
|-----------------------|---------------|---|
| Data Rate | See Table 5-5 | Set per NC and NCI codes. |
| Secondary Channel | Yes or No | Set per NC and NCI code options (Table 5-5) |
| Error Correction | Yes or No | Fourth position "X" in NC code for No error correction. Other fourth position values may or may not provide error correction. Default values for non-"X": 56 kbit/s and above rates, set to No, otherwise set to Yes. Provide instructions if not using the fourth position "X" and default values are not desired. Note: Error correction at 56 kbit/s data rate and above will require the use of a second adjacent DS0 channel on the multiplexer and DS1 channel. |
| Type of multiplexer | Various | Set by Qwest to match type of multiplexer |
| Zero Code Suppression | On or Off | Default value is Off for 64 kbit/s and On for other rates. Specific instructions required if not default. |
| Latching Loopback | On or Off | Default is On. If latching loopback is not required, provide specific instructions. |
| Extended Range | On or Off | Applies only to 56 and 64 kbit/s data rates. Default value is off. Provide specific instructions if On is required. * |

* Extended Range should be used only for loops exceeding a threshold value of 34 dB Actual Measured Loss measured from OCU-DP to a customer's older model Channel Service Unit/Data Service Unit (CSU/DSU). New CSU/DSUs with improved capabilities require a threshold of up to 43 dB. See ANSI T1.410-1992, *Carrier-to-Customer Metallic Interface -- Digital Data at 64 kbit/s and Subrates*, for further information. The Extended Range option must not be used for shorter loops since cross-talk may be a problem.

5.9.5 Digital Signal Level Zero-Data Port (DS0-DP)

Basic information and usage of DS0-DP channel units were discussed in Section 5.7.2. Synchronization is required for connections to this card. See PUB 77386 for further details. The DS1 multiplexer will be synchronized by Qwest.

Table 5-13 lists the options normally available with OCU-DP channel units along with how they are specified.

Table 5-13 Typical DS0-DP Channel Unit Options

| Option | Values | Option Setting Instruction Method |
|-----------------------|---------------|---|
| Data Rate | See Table 5-5 | Set per NC and NCI codes. |
| Error Correction | Yes or No | Fourth position "X" in NC code for No error correction. Other fourth position values may or may not provide error correction. Default values for non-"X": 56 kbit/s and above rates, set to No, otherwise set to Yes. Provide instructions if not using the fourth position "X" and default values are not desired. Note: Error correction at 56 kbit/s data rate and above will require the use of a second adjacent DS0 channel on the multiplexer and DS1 channel. |
| Type of multiplexer | Various | Set by Qwest to match type of multiplexer |
| Zero Code Suppression | On or Off | Default value is on for 56 kbit/s and below rates. Specific instructions required if not default. Off is the only value for 64 kbit/s data rate. |
| Latching Loopback | On or Off | Default is On. If latching loopback is not required, provide specific instructions. |

5.9.6 ISDN "U" Interface Channel Unit

These channel units are known by several names frequently based on the term "brite". The cards are designed to feed the Basic Rate ISDN 2B+D signal on a two-wire metallic non-loaded loop.

This channel unit provides an ISDN 2B1Q interface which meets all Layer 1 requirements as specified in ANSI T1.601-1992, *Telecommunications - Integrated Services Digital Network (ISDN) - Basic Access Interface for use on Metallic Loops for Application on the Network Side of the NT (Layer 1 Specification)*. Transportation of ISDN Basic Rate 2B+D information over DS1 facilities in the 3-DS0 format is specified in TR-NWT-000397, *ISDN Basic Access Transport System Requirements*.

The ISDN 3-DS0 method of Time Domain Multiplexing (TDM) method of multiplexing does conform to requirements of TR-NWT-000393, *Generic Requirements for ISDN Basic Access Digital Subscriber Lines*. It may not have the additional enhancements for *Universal Data Channel* (UDC) as proposed in Chapter 11 of TR-NWT-397.

These channel units use D4 counting in slot usage. The 2B+D channel uses three time slots on the DS1 and three slots in the channel bank. Thus, the ISDN channel unit **can not** be placed in slots 23 or 24.

Proper operation requires that matching CLEC equipment be synchronized to a clock traceable to a Stratum I source.

Table 5-14 lists the options for this channel unit.

Table 5-14 Typical ISDN “U” Interface Channel Unit Options

| Option | Values | Option Setting Instruction Method |
|-----------------------------|---------------------|--|
| Zero Byte Substitution | Disabled Enabled | Qwest will set to match the DS1 facility. Set to Disabled for B8ZS and Enabled for AML. |
| Termination Mode | LU/LT * LU/NT | Determined by NCI code. |
| If Termination Mode is LULT | Adjacent Tandem | DC sealing current is provided. (Default option) DC sealing current is not provided. |
| If Termination Mode is LUNT | Adjacent Tandem | Periodic wake-up tone is not provided. Periodic wake-up tone is provided. |

* LU/LT at adjacent-to-customer or tandem office source.
LU/NT at adjacent-to-switch or tandem office sink.
See Figure 5-5 for an illustration.

ISDN “U” type channel units have an option to describe the termination mode. Figure 5-5 is a simplification of a figure from ANSI T1.601-1992, Annex E. NI #1 is located one wire center. The second NI is located in a second wire center. The third NI is located at the customer’s location. The ANSI document should be consulted for further information.

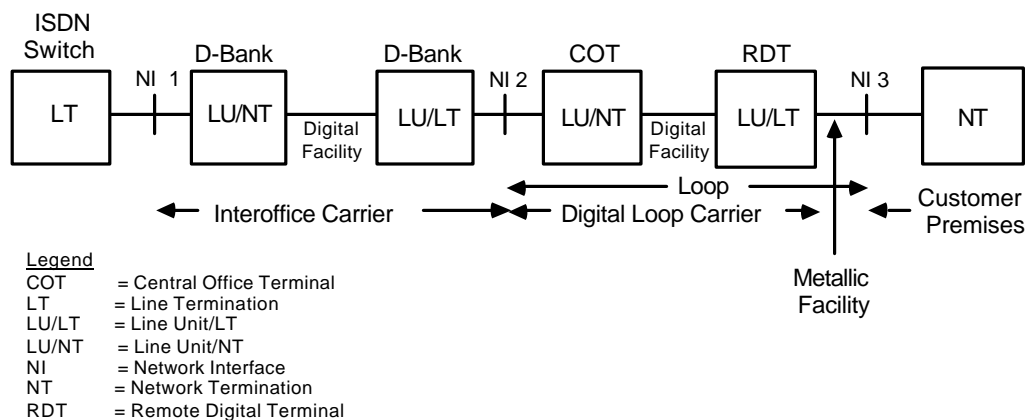


Figure 5-4 Worst Case ISDN Basic Access Configuration

5.10 Application Example -- Continued

Continuing with the example of Section 5.8, the channel unit options are set as follows:

Channel 1

The NC code LC-- identifies that this is a voice line. The NCI code 02QC3.OOD indicates that this is the open end of a line using loop start signaling. A 2-wire, 900 ohm, FXOG channel unit would be used.

Table 5-7 contains a listing of the applicable options. The Network Buildout would default to 0.016 μ f unless other instructions were provided. The attenuator would be set for a 2 dB loop unless other instructions were provided.

Channel 2

The NC code XH-X (Table 5-5) identifies that this is a 56 kbit/s digital data channel without error correction and no secondary channel. The NCI code 04QB5.00 indicates that this requires an OCU-DP channel unit. The options are listed in Table 5-11.

The options Zero Code Suppression and Latching Loopback will both default to "On" unless specific instructions are provided to Qwest to set them to "OFF".

Similarly, the Extended Range option (which applies at this data rate) will default to "Off" unless otherwise instructed.

Channel 3

The NC code LD-- identifies that this is a voice trunk. The NCI code 02QC2.RVO helps select a DPO channel unit. The NCI code position 5 indicates 900 ohm impedance. Assume that the default values for the network buildout capacitor and other options are acceptable.

Channel 4

The NC code LD-- identifies that this is a voice trunk. The NCI code 02QC3.OOC indicates that this is the closed end of a trunk using ground start signaling. A 2-wire, 900 ohm, FXSG channel unit would be used.

Table 5-7 contains a listing of the applicable options. The Network Buildout would default to 0.016 μ f unless other instructions were provided.

Channel 5

The attenuator values and impedance are taken from the NCI code 02QC3.OOF.JQ. Assuming the default values are acceptable, no additional option settings need be specified.

Channel 6

The attenuator values and impedance are taken from the NCI code 04QC2.OOF. Assuming the default values are acceptable, no additional option settings need be specified.

Channel 7

The NC code LG-- identifies that this is a voice line. The NCI code 02QC3.OOE indicates that this is the closed end of a line using loop start signaling. A 2-wire, 900 ohm, FXSG channel unit would be used.

Table 5-7 contains a listing of the applicable options. The Network Buildout would default to 0.016 μ f unless other instructions were provided.

Channel 8

The NC code XGB- (Table 5-5) identifies this as a 9.6 kbit/s channel with secondary channel. The NCI code 04QC5.OOL denotes that a DS0-DP is required to provide a DS0-A formatted signal. The options are listed in Table 5-12.

The options Zero Code Suppression and Latching Loopback will both default to "On" unless specific instructions are provided to Qwest to set them to "OFF".

The value for Error Correction will be set to "On" unless otherwise instructed.

Channel 9-11

The default values are acceptable. That is, the service level is 2B+D, D4 counting is used, B8ZS applies and the Zero Byte Substitution is disabled, and since it is adjacent to the customer, the default of DC sealing current is provided.

CONTENTS

| Chapter and Section | Page |
|--|------|
| 6. DS0 Unbundled Dedicated Interoffice Transport | 6-1 |
| 6.1 General Description..... | 6-1 |
| 6.2 Valid Network Channel/Network Channel Interface Combinations.. | 6-1 |
| 6.3 Application Examples..... | 6-3 |
| 6.3.1 Analog Voice Example..... | 6-3 |
| 6.3.2 Digital Data Example | 6-3 |

Figures

| | |
|---------------------------------|-----|
| 6-1 DS0 Level UDIT | 6-1 |
| 6-2 Open End -- Closed End..... | 6-2 |

Tables

| | |
|---------------------------------------|-----|
| 6-1 DS0 UDIT NC/NCI Combinations..... | 6-2 |
|---------------------------------------|-----|

6. DS0 Unbundled Dedicated Interoffice Transport

6.1 General Description

An Unbundled Dedicated Interoffice Transport (UDIT) at the DS0 level provides a two-point voice or DS0 channel between two Qwest wire centers. No multiplexing is available with the DS0 level UDIT.

Figure 6-1 illustrates a DS0 UDIT. The thinner lines represent Qwest infrastructure used to transport the DS0/voice channel between the two wire centers.

Combinations of Network Channel (NC) and Network Channel Interface (NCI) codes will be used to select channel units.

The NC and NCI codes, along with additional information, will be used to set the options on the channel units. The available channel units and their options are discussed in Section 5.9.

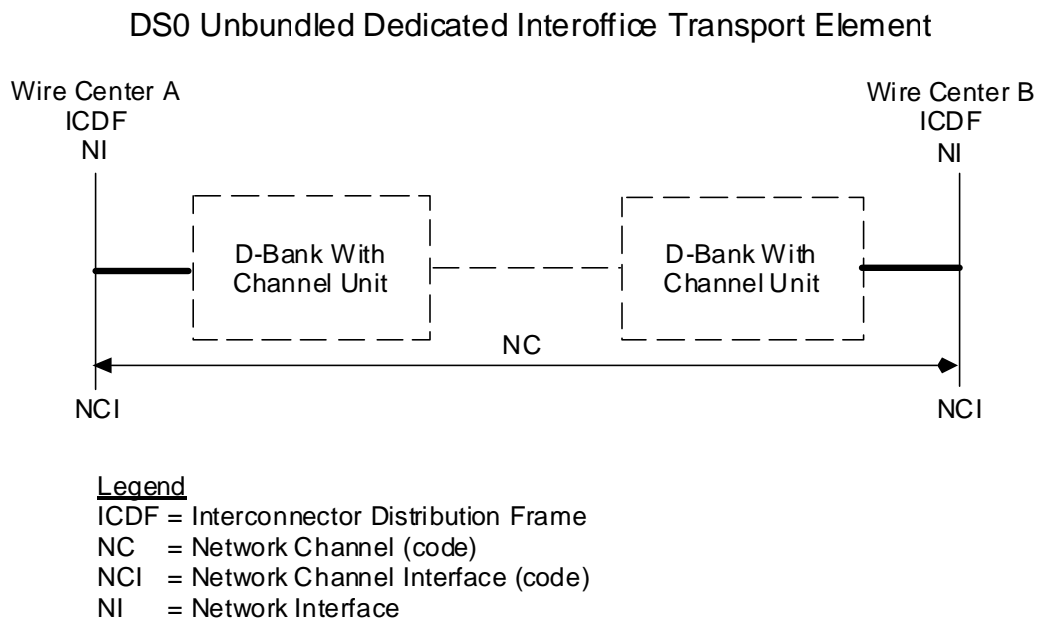


Figure 6-1: DS0 Level UDIT

The open end of a channel is the end towards the switch. The closed end is towards the terminal or telephone set and away from the switch. Figure 5-3 illustrates an application where a switch is connected to a UDIT and then to a loop. While actual NCI codes are not shown, the Open Ends and Closed Ends for each segment are marked. Each segment has both an open end and a closed end. However, the switch segment may only identify the closed end and ignore the open end at the switch.

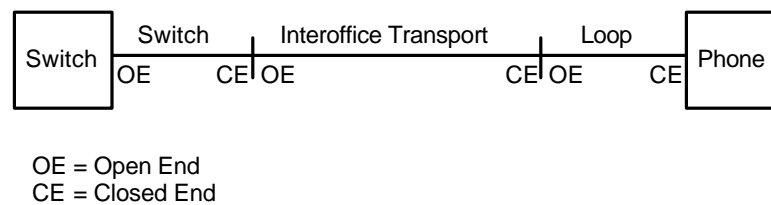


Figure 6-2 Open End -- Closed End

6.2 Valid Network Channel/Network Channel Interface Combinations

Table 6-1 contains a list of valid NC/NCI code combinations with references to Chapter 5 where further information may be found.

Table 6-1: DS0 UDIT NC/NCI Combinations

| Channel Type | NC Code | Compatible NCI Codes | | Defining Table | Channel Units | |
|---|-----------------|------------------------------------|-----------------------------------|----------------|-------------------|----------------|
| | | A-End ** | Z-End ** | | Type | Section |
| Voice, Ground Start | LD-- | 02QC2.OOB | 02QC2.OOC | 5-4 | 2FXOG, 2FXSG | 5.9.1 |
| Voice, Loop Start | LC-- | 02QC2.OOD | 02QC2.OOE | 5-4 | 2FXOG, 2FXSG | 5.9.1 |
| Voice, Transmission Only - 2-Wire | LG-- | 02QC2.OOF | 02QC2.OOF | 5-4 | ETO2G | 5.9.2 |
| Voice, Transmission Only - 4-Wire | LG-- | 04QC2.OOF | 04QC2.OOF | 5-4 | ETO4 | 5.9.2 |
| Voice, Reverse Battery | LD-- | 02QC2.RVO | 02QC2.RVT | 5-4 | DPO, DPTG | 5.9.3 |
| Digital data, 2.4 kbit/s | XA--, XA-X * | 04QB5.00 04QC5.OOJ 04QC5.OOJ | 04QB5.00 04QB5.00 04QC5.OOJ | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 2.4 kbit/s with Secondary Channel | XAB- XABX * | 04QB5.00 04QC5.OOJ 04QC5.OOJ | 04QB5.00 04QB5.00 04QC5.OOJ | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 4.8 kbit/s | XB--, XB-X * | 04QB5.00 04QC5.OOK 04QC5.OOK | 04QB5.00 04QB5.00 04QC5.OOK | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 4.8 kbit/s with Secondary Channel | XBB- XBBX * | 04QB5.00 04QC5.OOK 04QC5.OOK | 04QB5.00 04QB5.00 04QC5.OOK | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 9.6 kbit/s | XG--, XG-X * | 04QB5.00 04QC5.OOL 04QC5.OOL | 04QB5.00 04QB5.00 04QC5.OOL | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 9.6 kbit/s with Secondary Channel | XGB- XGBX * | 04QB5.00 04QC5.OOL 04QC5.OOL | 04QB5.00 04QB5.00 04QC5.OOL | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 19.2 kbit/s | XC-- XC-X * | 04QB5.00 04QC5.OOM 04QC5.OOM | 04QB5.00 04QB5.00 04QC5.OOM | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 19.2 kbit/s with Secondary Channel | XCB- XCBX * | 04QB5.00 04QC5.OOM 04QC5.OOM | 04QB5.00 04QB5.00 04QC5.OOM | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 56.0 kbit/s | XH-X * | 04QB5.00 04QC5.OOP 04QC5.OOP | 04QB5.00 04QB5.00 04QC5.OOP | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Digital data, 56.0 kbit/s with Secondary Channel | XHBX * | 04QB5.00 04QC5.OOP 04QC5.OOP | 04QB5.00 04QB5.00 04QC5.OOP | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |

| | | | | | | |
|------------------------------|--------|------------------------------------|-----------------------------------|-----|-------------------|----------------|
| Digital data, 64.0 kbit/s | XD-X * | 04QB5.00 04QC5.OOQ 04QC5.OOQ | 04QB5.00 04QB5.00 04QC5.OOQ | 5-5 | OCU-DP, DS0-DP | 5.9.4 5.9.5 |
| Basic Rate ISDN | AD-- | 02QC5.OOS | 02QC5.OOV | 5-6 | ISDN "U" | 5.9.6 |

* An X in the fourth position denotes no error correction (e.g., XA-X). See Section 5.7.2.

** The reverse combinations (Z-End to A-End) are also valid.

NCI codes on the same line are compatible. Other information is compatible in the same rows. See Section 6.3 for examples on reading the table.

Basic Rate ISDN required three (3) DS0 channels. Error correction for 56.0 and 64.0 kbit/s digital data channels is not available with the DS0 UDIT.

6.3 Application Examples

6.3.1 Analog Voice Example

If requesting an analog voice channel with loop start signaling, the second entry in Table 6-1 indicates that the channel would be ordered by the NC code LC-- and the NCI codes 02QC2.OOD and 02QC2.OOE, one at each end (open and closed end respectively). These codes are described in Table 5-4. See Section 5.7.1 for further information.

This combination would order one FXOG and one FXSG channel unit at the indicated end. These units are described in Section 5.9.1. Additional information may be required to set the options as described in Section 5.9.1.

6.3.2 Digital Data Example

If a 9.6 kbit/s digital data DS0 UDIT is desired with the intent of connecting the channel to a metallic loop at one end and a multiplexed transport system requiring a DS0-A signal at the other end. And a secondary channel is not required and error correction is optional.

The appropriate row in Table 6-1 shows compatibility for two NC codes (XG-- or XG-X) with three potential NCI code pairs. Since error correction is optional, the NC code XG-- would be selected. See Section 5.7.2 for further information.

The second of the three NCI code pairs, 04QC5.OOL - 04QB5.00, will provide the proper connections to be used for metallic loop and DS0-A respectively as described in Table 5-5. OCU-DP and DS0-DP channel units will be provided at the respective ends. Options will be set as described in Sections 5.9.4 and 5.9.5.

The first of the three NCI code pairs would provide a DS0-DP channel unit at both ends of the DS0-DP channel. The third pair would provide OCU-DP channel units at both ends.

CONTENTS

| Chapter and Section | Page |
|--|------|
| 7. Unbundled Customer Controlled Reconfiguration Element..... | 7-1 |
| 7.1 Element Description..... | 7-1 |
| 7.2 Types of Ports..... | 7-1 |
| 7.3 Types of Digital Cross-Connect Systems | 7-2 |
| 7.4 Terminations and Design Issues..... | 7-3 |
| 7.5 Applicable Network Channel and Network Channel Interface Codes..... | 7-3 |
| 7.5.1 DS1 Ports..... | 7-3 |
| 7.5.2 DS3 Ports..... | 7-4 |
| 7.5.3 Virtual Ports..... | 7-5 |
| 7.5.4 Summary of NC/NCI codes | 7-5 |
| 7.6 Establishing a Customer Network..... | 7-5 |

Figures

| | |
|--|-----|
| 7-1 Unbundled Customer Reconfiguration Element Port..... | 7-2 |
| 7-2 Example of Customer Network..... | 7-7 |

Tables

| | |
|--|-----|
| 7-1 DS1 Port Network Channel Codes | 7-4 |
| 7-2 Compatible NC and NCI Codes..... | 7-6 |

7. Unbundled Customer Controlled Reconfiguration Element

7.1 Element Description

The Unbundled Customer Controlled Reconfiguration Element (UCCRE) gives a Competitive Local Exchange Carrier (CLEC) the ability to connect elements together into a network and reconfigure the network on a near-real-time basis.

UCCRE is similar to the Qwest finished service COMMAND A LINKSM. COMMAND A LINKSM is described in PUB 77371, *COMMAND A LINKSM Technical Description And Interface Combinations*. Readers will need to review this publication to fully understand the UCCRE product.

The primary difference between UCCRE and COMMAND A LINKSM is that COMMAND A LINKSM is an option available only with finished services. UCCRE may be used with UNEs and connections to the CLEC's collocated equipment. Other differences will be identified in this chapter. Further information found in PUB 77371 would apply.

Other Interconnector Designated Equipment (IDE) and Qwest-provided UNEs may be connected at the InterConnection Distribution Frame (ICDF).

The CLEC controls the DCS by means of a Customer Controller. The CLEC accesses the controller via a dial-up line or a Qwest attendant. Additional information about the controller may be found in PUB 77371.

UCCRE is available only in selected wire centers and on selected DCSs in these wire centers. Expansion to additional wire centers or DCSs is done on an inquiry basis.

7.2 Types of Ports

There are three types of UCCRE ports: DS1, DS3 and Virtual. PUB 77371 discusses additional information about the ports. Figure 7-1 illustrates a DS1 or DS3 UCCRE port with the DCS data link connection to the Customer Controller. The port consists of a DS1 or DS3 channel connected to a DS1 or DS3 DCS port. Customer access to control the DCS connections is via the Customer Controller and data link.

The CLEC has the responsibility to order and connect UCCRE ports, other UNEs, and their own equipment that are technically compatible. The primary considerations at the DS1 and DS3 levels are the line code and frame format. See PUB 77371 for further information.

7.3 Types of Digital Cross-Connect Systems

There are two basic types of DCSs used with UCCRE. They are the 1/0 DCS and the 3/1 DCS.

The 1/0 DCS has DS1 ports and the reconfigurations are done at the DS0 level.

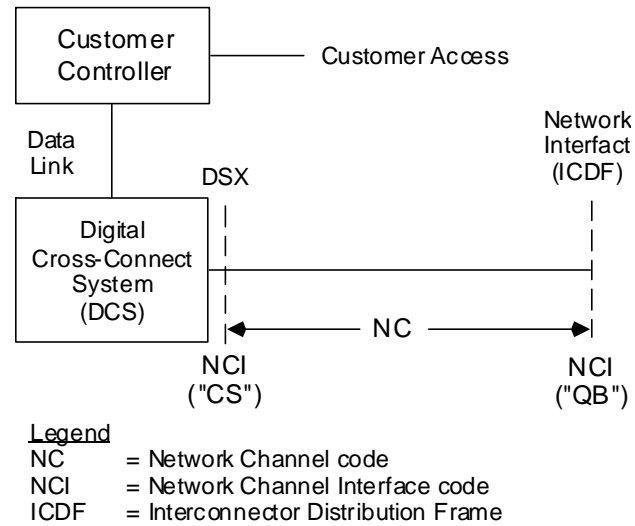


Figure 7-1: Unbundled Customer Reconfiguration Element Port

The 3/1 DCS has both DS1 and DS3 ports. The reconfigurations are done at the DS1 level.

The software system used with the Customer Controller will enable the CLEC to reconfigure groups of channels using a single command. For example, all 24 DS0 channels from a DS1 port may be reconfigured using a single command.

CLECs wishing to reconfigure DS0 level channels transported in a DS3 channel will have to use a two-step configuration. There are two alternatives.

One alternative is to demultiplex the DS3 to DS1 level and then order DS1 ports on a 1/0 DCS. The latter will give the DS0 reconfiguration capability.

The other alternative is to order DS3 and DS1 ports on a 3/1 DCS and then order DS1 ports on a 1/0 DCS. Then the DS1 ports on both DCSs must be connected together at the ICDF. The 1/0 DCS will give the DS0 reconfiguration capability.

Those CLECs requiring the COMMAND A LINKSM DS0 port functionality will have to build their own. This may be done using UNEs by purchasing a UCCRE DS1 port on a 1/0 DCS and connecting it to either their own DS1 multiplexer or to a DS1 stand alone multiplexing associated with UDIT. (described in Chapter 5). This combination of UNEs will create the equivalent of 24 DS0-level COMMAND A LINKSM ports.

7.4 Terminations and Design Issues

The DCS port will be connected to the ICDF frame using tie cables via the appropriate DSX cross-connect frame. This DSX frame serves as a Network Interface at the DCS. The CLEC may then connect the UCCRE port to other elements or IDE at the ICDF.

One exception to this arrangement is the DS1 ports on a 3/1 DCS. This exception does **not** apply to DS3 ports on 3/1 DCSs or DS1 ports on 1/0 DCSs. These DCS ports will be directly connected from the DS1 port on the 3/1 DCS to the DS1 ICDF with no intervening DSX-1. Since the DCS will be directly connected to the ICDF, the signal at the ICDF will be a templated DS1 signal.

The provisioning interval for the DS1 port on the 3/1 DCS will be longer than for other UCCRE port arrangements and other UNEs. The normal process is that Qwest places tie cables and terminations from the DSX-1 frames used by the UNEs. However, in this situation, DS1 tie cables will have to be placed between the 3/1 DCS and the DS1 ICDF when the UCCRE ports are ordered.

7.5 Applicable Network Channel and Network Channel Interface Codes

7.5.1 DS1 Ports

The Network Channel Interface (NCI) code for the DS1 port appearance on the ICDF (Figure 7-1) is 04QB9.11 as defined in Chapter 5.

The NCI code next to the DCS in Figure 7-1 is 04CS9.10R or 04CS9.31R as described in PUB 77371. This is electrically similar to the 04DS9 NCI code. Specifically, the 10R option indicates that the DS1 channel is connected to a 1/0 DCS with customer reconfiguration capability. Similarly, the 31R option applies to the DS1 port on a 3/1 DCS with customer reconfiguration capability.

.

The 04CS9.31R code should be used for the 3/1 DCS although there is no DSX-1 frame at the location. As discussed in Section 7.4, the 04QB9.11 NCI describes the network interface.

There are several Network Channel (NC) codes used depending on the line code and frame format. Not all are available in all locations. Table 7-1 defines the NC Codes.

Table 7-1: DS1 Port Network Channel Codes

| Network Channel Code | Description |
|----------------------|--|
| HC - C | Superframe, Alternate Mark Inversion, and Customer Reconfigurable |
| HCDC | ANSI T1.403-1995 Extended Superframe, Alternate Mark Inversion, and Customer Reconfigurable. |
| HCEC | ANSI T1.403-1995 Extended Superframe, B8ZS, and Customer Reconfigurable. |
| HCFC | Non-ANSI Extended Superframe, Alternate Mark Inversion, and Customer Reconfigurable. |
| HCGC | Non-ANSI Extended Superframe, B8ZS, and Customer Reconfigurable. |
| HCZC | Superframe, B8ZS, and Customer Reconfigurable. |

7.5.2 DS3 Ports

The NCI code for the DS3 port appearance on the ICDF (Figure 7-1) is 04QB6.33 as defined in Chapter 4.

The NCI code next to the DCS in figure 7-1 is 04CS6.31R as described in PUB 77371. This is electrically similar to the 04DS6 NCI code. Specifically, the 31R option indicates that the DS3 channel is connected to a DS3 port on a 3/1 DCS with customer reconfiguration capability.

The only applicable NC code is HF-- as defined in Chapter 4. This code does not explicitly identify the port as “Customer Reconfigurable” as is done with the DS1 port NC codes. However, the option “R” in the 04CS6.31R NCI code at the DCS identifies this as a UCCRE port and not another type of DS3 channel.

7.5.3 Virtual Ports

Virtual ports are used to provide cross-connections between separate customer's networks both appearing on the same DCS. This feature is useful in situations where two customers want to share information. A shared disaster recovery site is a typical application. The customers would connect a circuit to the recovery site via a virtual port.

A partition is set up by Qwest in the Customer Controller between each customer's services when circuits are initially defined. Each customer has access to only one side of the virtual port.

The ports are implemented using software and are controlled by the Customer Controller. The virtual port is internal to the DCS and has no direct network interface. The virtual port is accessed only through standard DS3 or DS1 ports into the DCS. The CLEC must have ordered standard DS3 or DS1 ports to get into the DCS. Virtual ports have no external connections.

7.5.4 Summary of NC/NCI codes

Table 7-2 summarizes the compatible NC and NCI codes. Codes in the same row are compatible subject to limitations on the specific DCS. PUB 77371 should be consulted for further information.

7.6 Establishing a Customer Network

The CLEC must arrange to become a UCCRE customer prior to ordering any UCCRE ports to build a customer network using UCCRE. Network, in this context, means a collection of UNEs and the CLEC's own equipment and facilities used to provide services to the CLEC's customers.

A Qwest Customer Controller System Administrator must establish the CLEC in the Customer Controller database. When ports are ordered, the System Administrator will establish the ports in the database and connect initial cross-connects as directed by the CLEC. Once this is done, the CLEC may reconfigure the connections as needed.

The customer makes the reconfigurations by using a dial up data connection to the Customer Controller or by calling a Qwest attendant. Full details will be provided when the customer establishes the database.

Figure 7-2 illustrates a simple UCCRE customer network with three DS1 ports. Port 1 is connected to the CLEC's IDE. Port 2 is connected to an Unbundled DS1 Capable Loop. Port 3 is connected to a DS1 UDIT to a remote wire center. In this example, the CLEC intends to connect their equipment to the loop and the DS1 UDIT. UCCRE also would permit the CLEC to connect Port 2 to Port 3.

Table 7-2: Compatible NC and NCI Codes

| Port Type | Description Line Code and Frame Format | NC Codes | NCI Codes | |
|-----------|--|----------|-----------|-------------------------------------|
| | | | ICDF | DCS * |
| DS1 | Superframe, Alternate Mark Inversion, and Customer Reconfigurable | HC - C | 04QB9.11 | 04CS9.10R 04CS9.11R 04CS9.31R |
| | ANSI T1.403-1995 Extended Superframe, Alternate Mark Inversion, and Customer Reconfigurable. | HCDC | 04QB9.11 | 04CS9.10R 04CS9.11R 04CS9.31R |
| | ANSI T1.403-1995 Extended Superframe, B8ZS, and Customer Reconfigurable. | HCEC | 04QB9.11 | 04CS9.10R 04CS9.11R 04CS9.31R |
| | Non-ANSI Extended Superframe, Alternate Mark Inversion, and Customer Reconfigurable. | HCFC | 04QB9.11 | 04CS9.10R 04CS9.11R 04CS9.31R |
| | Non-ANSI Extended Superframe, B8ZS, and Customer Reconfigurable. | HCGC | 04QB9.11 | 04CS9.10R 04CS9.11R 04CS9.31R |
| | Superframe, B8ZS, and Customer Reconfigurable. | HCZC | 04QB9.11 | 04CS9.10R 04CS9.11R 04CS9.31R |
| DS3 | DS3, M2/3 Multiplex Format | HF-- | 04QB6.33 | 04CS6.31R 04CS6.33R ** |

* Not all types of DCS connections are available in a given location. See PUB 77371 for further information about these interfaces.

** The DS3 channel to a 04CS6.33R interface may be unchannelized without M2/3 format.

This customer network is built as follows:

First, all IDE is installed and ICDF terminations are ordered.

Second, the CLEC arranges to use UCCRE on the DCS in this wire center. Qwest provides the CLEC with ID and password for the customer controller. Operating instructions are also provided.

Third, the UNEs are ordered as described (in no particular order) in the following paragraphs. Finally, the jumpers are placed on the ICDF.

The three DS1 UCCRE ports are ordered using the NC code HCEC. The CLEC tells the Qwest system administrator how to connect the initial ports together (not shown).

The three DS1 UCCRE ports are terminated on the ICDF at locations identified by the numbers 1, 2 and 3. The appropriate NCI codes used to order the three ports are shown.

The DS1 UDIT is terminated at Number 4 with the NCI code 04QB9.11. The NC code used to order this UNE is HCE-.

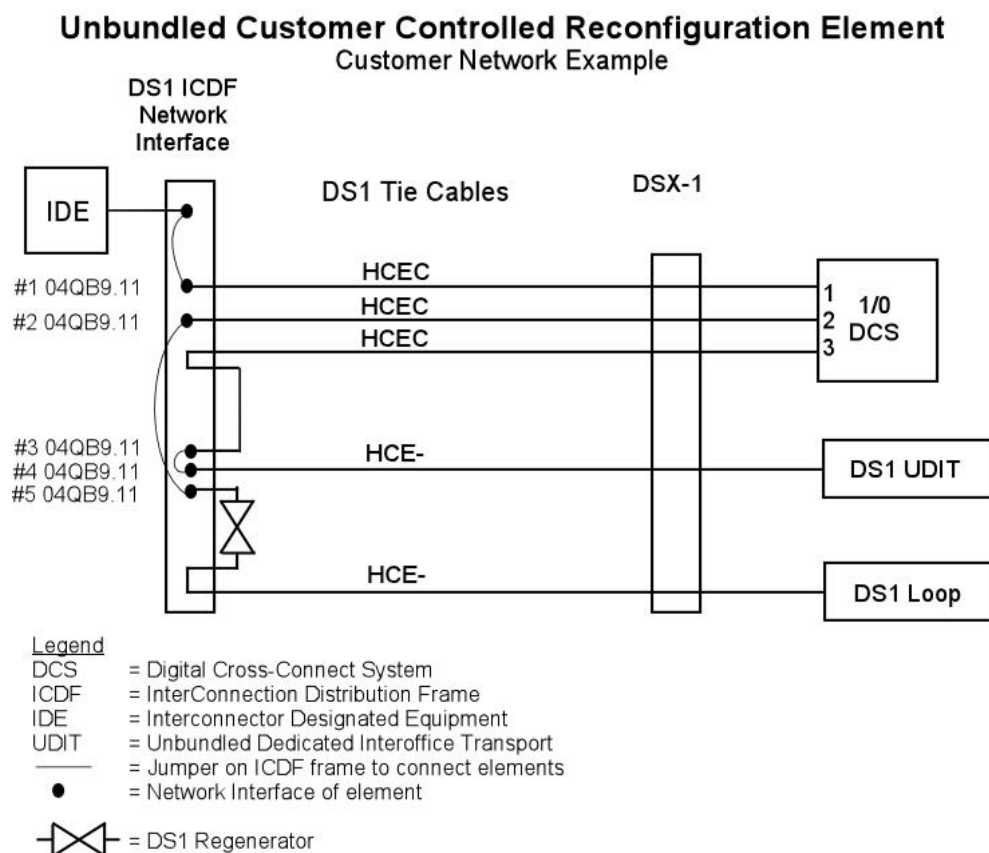


Figure 7-2: Example of Customer Network

The Unbundled DS1 capable loop is terminated at Number 5 with the NCI code 04QB9.11. The NC code used to order this UNE is HCE-.

Once the jumpers are connected, the CLEC can reconfigure this network as needed.

CONTENTS

| Chapter and Section | Page |
|---|------|
| 8. OC-n Unbundled Dedicated Interoffice Transport (UDIT) | 8-1 |
| 8.1 General Description..... | 8-1 |
| 8.2 Network Interfaces and Network Channel Interface (NCI) Codes... | 8-1 |
| 8.2.1 Optical Network Interfaces -- General..... | 8-3 |
| 8.2.2 OC-3 Interface | 8-3 |
| 8.2.3 OC-12 Interface | 8-3 |
| 8.2.4 OC-48 Interface | 8-4 |
| 8.2.5 OC-192 Interface | 8-4 |
| 8.2.6 Four Fiber OC-n Interfaces..... | 8-4 |
| 8.2.7 Optical “Design-To” Point | 8-4 |
| 8.3 OC-n Two-Point UDIT Elements..... | 8-5 |
| 8.4 Protection Configuration..... | 8-6 |
| 8.5 Application Example..... | 8-6 |

Figures

| | |
|--|-----|
| 8-1 Optical Interface Arrangements | 8-2 |
| 8-2 OC-n Two-Point UDIT Element..... | 8-5 |
| 8-3 OC-n UDIT Application Example..... | 8-6 |

Tables

| | |
|---|-----|
| 8-1 OC-n UDIT Network Interface Availability | 8-1 |
| 8-2 Interface Combinations | 8-2 |
| 8-3 Minimum Fixed Optical Power Point | 8-4 |
| 8-4 Two-Point OC-n UDIT Network Channel Codes | 8-5 |
| 8-5 OC-n UDIT Network Channel Interface Codes | 8-5 |

8. OC-n Unbundled Dedicated Interoffice Transport (UDIT)

8.1 General Description

Unbundled Dedicated Interoffice Transport (UDIT) at the Synchronous Optical NETwork (SONET) level provides two-point channels at the Optical Carrier (OC) levels of OC-3 (155.52 Mbit/s), OC-12 (622.08 Mbit/s), OC-48 (2.488 Gbit/s) and OC-192 (9.865 Gbit/s) between two Qwest wire centers.

OC-n UDIT is based on Qwest's Synchronous Service Transport (SST) Service. Further technical information about SST may be found in PUB 77346. The publication includes more detailed information about the technical characteristics of the SONET signal formats, synchronization issues, performance specifications and maintenance responsibilities. This chapter includes only selected information that applies to OC-n UDIT, including the necessary Network Channel (NC) and Network Channel Interface (NCI) codes used in ordering UDIT.

8.2 Network Interfaces and Network Channel Interface (NCI) Codes

OC-n UDIT is available with a number of different Network Interfaces (NIs). Table 8-1 lists the available NIs with each type of OC-n UDIT. Combinations of NIs are available as listed on each row. These NIs are further described in this section.

Table 8-1: OC-n UDIT Network Interface Availability

| Interface Type Combinations | OC-n UDIT Transport Capacity | | | |
|--------------------------------|------------------------------|-------|-------|--------|
| | OC-3 | OC-12 | OC-48 | OC-192 |
| OC-3 | X | | | |
| OC-12 | | X | | |
| OC-48 | | | X | |
| OC-192 | | | | X |

The following interface types may be made available on corresponding OC-n UDIT transport capacities. The interface face types would have to be purchased as a separate UNE or finished service.

Table 8-2: Interface Combinations

| INTERFACE | OC-n UDIT TRANSPORT CAPACITY |
|-----------|------------------------------|
|-----------|------------------------------|

| TYPE | OC-3 | OC-3c* | OC-12 | OC-48 | OC-192 |
|-------------------------|------|--------|-------|-------|--------|
| DS1 | YES | NO | YES | NO | NO |
| DS3/STS-1 | YES | NO | YES | YES | YES |
| OC-3 | YES | NO | YES | YES | YES |
| OC-3 with an STS-3c | NO | YES | YES | YES | YES |
| OC-12 | NO | NO | YES | YES | YES |
| DS1 & DS3/STS-1 | YES | NO | YES | NO | NO |
| DS3/STS-1 & OC-3 | NO | NO | YES | YES | YES |
| OC-3 & OC-12 | NO | NO | NO | YES | YES |
| DS3/STS-1, OC-3 & OC-12 | NO | NO | NO | YES | YES |
| OC-24 | NO | NO | NO | YES | YES |
| OC-48 | NO | NO | NO | YES | YES |

Notes: * The OC-3c Transport Capacity indicates a single OC-3 containing an STS-3c signal

Figure 8-1 illustrates the optical interface arrangement.

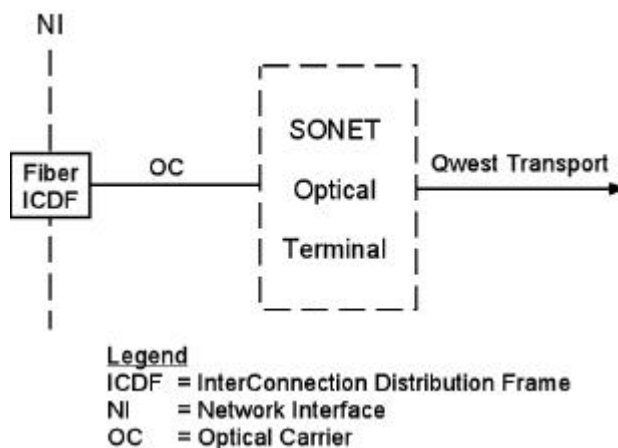


Figure 8-1: Optical Interface Arrangements

8.2.1 Optical Network Interfaces -- General

The Fiber InterConnection Distribution Frame (ICDF) cross-connect bay or frame serves as the optical NI.

The Fiber ICDF is described in PUB 77386. Connections provided will be of the appropriate type for the Fiber ICDF and the specific optical interface ordered.

Qwest will notify the CLEC as to the type of connectors so that the CLEC may obtain the appropriate jumpers.

It is the transmitting party's responsibility to achieve the minimum fixed optical power level at the interface as listed in Table 8-3. If available and appropriate, the Qwest LASER will be a short reach optic as defined in GR-253-CORE. Otherwise, an intermediate LASER will be substituted.

Table 8-3: Minimum Fixed Optical Power Point

| Interface | Rate | Minimum Fixed Power Point |
|-----------|---------------|---------------------------|
| OC-3 | 155.52 Mbit/s | - 20 dBm |
| OC-12 | 622.08 Mbit/s | - 17 dBm |
| OC-48 | 2.488 Gbit/s | - 11 dBm |
| OC-192 | 9.865 Gbit/s | - 17 dBm |

Connections with OC-n UDIT will require that the customer and Qwest do some joint engineering to communicate technical parameters beyond the capability of the NC and NCI codes.

8.2.2 OC-3 Interface

An OC-3 interface provides a high capacity channel for the bi-directional transmission of 155.52 Mbit/s, using an optical interface, delivered from Qwest owned Line Terminating Equipment. The OC-3 Interface is further described in PUB 77346.

8.2.3 OC-12 Interface

The OC-12 interface provides a high capacity channel for the bi-directional transmission of 622.08 Mbit/s, using an optical interface, delivered from Qwest owned Line Terminating Equipment. The OC-12 Interface is further described in PUB 77346.

8.2.4 OC-48 Interface

An OC-48 interface provides a high capacity channel for the bi-directional transmission of 2.488 Gbit/s, using an optical interface, delivered from Qwest owned Line Terminating Equipment. The OC-48 Interface is further described in PUB 77346.

8.2.5 OC-192 Interface

An OC-192 interface provides a high capacity channel for the bi-directional transmission of 9.865 Gbit/s, using an optical interface, delivered from Qwest owned Line Terminating Equipment. The OC-192 Interface is further described in PUB 77346.

8.2.6 Four Fiber OC-n Interfaces

The standard SONET NI is a 4-fiber interface. This NI consists of a pair of fibers for a working channel and a pair for the protection channel. See PUB 787346, ANSI T1.105.01-1995, *Synchronous Optical Network (SONET) -- Automatic Protection*, and ANSI T1.105.06-1996, *Synchronous Optical Network (SONET) --Physical Layer Specifications*, for further information.

8.2.7 Optical “Design-To” Point

The optical span between LASER and detector must be designed as a unit.

8.3 OC-n Two-Point UDIT Elements

OC-n two-point UDIT elements are available in OC-3, OC-12 and OC-48 bandwidths. Figure 8-2 illustrates the arrangement.

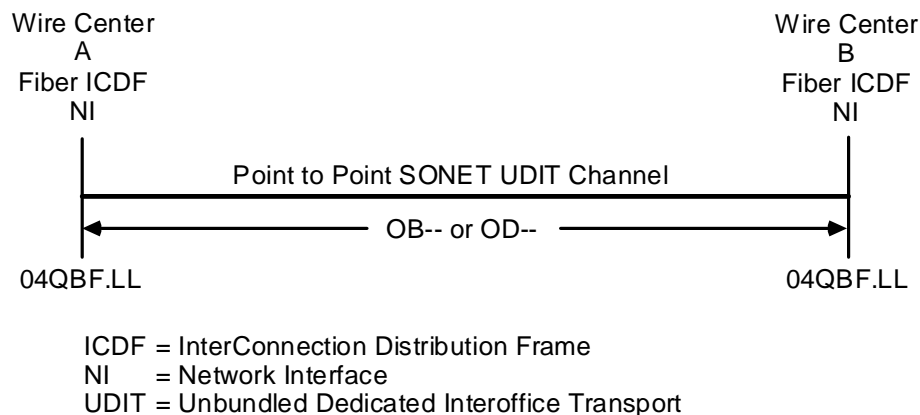


Figure 8-2: OC-n Point to Point UDIT Element

The Network Channel (NC) codes and Network Channel Interface (NCI) codes that apply are listed in Tables 8-4 and 8-5 respectively.

Table 8-4: Two-Point OC-n UDIT Network Channel Codes

| NC Code | Description |
|---------|--|
| OB-- | OC-3 SONET Point-to-Point (No Central Office Multiplexing) |
| OD-- | OC-12 SONET Point-to-Point (No Central Office Multiplexing) |
| OF-- | OC-48 SONET Point-to-Point (No Central Office Multiplexing) |
| OG-- | OC-192 SONET Point-to-Point (No Central Office Multiplexing) |

Table 8-5: OC-n UDIT Network Channel Interface Codes

| NC Code | Description |
|----------|---|
| 04QBF.LL | Manual Cross-Connect Termination With No Subranging Capability, Fiber Cross-Connect or Fiber Distribution Bay |

Table 8-6 Configuration Network Channel Interface (NCI) Codes -
SONET Optical Multiplexing associated with OC-3 or equivalent

| CONFIGURATION NCI CODE | QUANTITY OF OC-3's | QUANTITY OF DS3' s/STS-1's | QUANTITY OF DS1's |
|---|-----------------------|-------------------------------|----------------------|
| One Code must be specified for the Multiplexer Site | | | |
| 04SMF.A3 | 0 | 3 | 0 |
| 04SMF.A21 | 0 | 2 | 28 |
| 04SMF.A12 | 0 | 1 | 56 |
| 04SMF.A03 | 0 | 0 | 84 |

Table 8-7 lists NCI codes for SONET Optical Multiplexer operating at the OC-12 rate.

Table 8-7 Configuration Network Channel Interface (NCI) Codes -
SONET Optical Multiplexing associated with OC-12 or equivalent

| CONFIGURATION NCI CODE | QUANTITY OF OC-3's | QUANTITY OF DS3' s/STS-1's | QUANTITY OF DS1's |
|---|-----------------------|-------------------------------|----------------------|
| One Code must be specified for the Multiplexer Site | | | |
| 04SMF.E0 | 4 | 0 | 0 |
| 04SMF.D3 | 3 | 3 | 0 |
| 04SMF.D21 | 3 | 2 | 28 |
| 04SMF.D12 | 3 | 1 | 56 |
| 04SMF.D03 | 3 | 0 | 84 |
| 04SMF.C6 | 2 | 6 | 0 |
| 04SMF.C51 | 2 | 5 | 28 |
| 04SMF.C42 | 2 | 4 | 56 |
| 04SMF.C33 | 2 | 3 | 84 |
| 04SMF.C24 | 2 | 2 | 112 |
| 04SMF.C15 | 2 | 1 | 140 |
| 04SMF.C06 | 2 | 0 | 168 |
| 04SMF.B9 | 1 | 9 | 0 |
| 04SMF.B81 | 1 | 8 | 28 |
| 04SMF.B72 | 1 | 7 | 56 |
| 04SMF.B63 | 1 | 6 | 84 |
| 04SMF.B54 | 1 | 5 | 112 |
| 04SMF.B45 | 1 | 4 | 140 |
| 04SMF.B36 | 1 | 3 | 168 |
| 04SMF.B27 | 1 | 2 | 196 |

| | | | |
|-----------|---|----|-----|
| 04SMF.B18 | 1 | 1 | 224 |
| 04SMF.B09 | 1 | 0 | 252 |
| 04SMF.AC | 0 | 12 | 0 |

Note: Each OC-3 can provide either three DS3s or three STS-1s but not a combination of DS3s and STS-1s.

Table 8-7 Configuration Network Channel Interface (NCI) Codes -
OC-12 SONET Optical Multiplexer (Continued)

| CONFIGURATION NCI CODE | QUANTITY OF OC-3's | QUANTITY OF DS3' s/STS-1's | QUANTITY OF DS1's |
|---|-----------------------|-------------------------------|----------------------|
| One Code must be specified for the Multiplexer Site | | | |
| 04SMF.AB1 | 0 | 11 | 28 |
| 04SMF.AA2 | 0 | 10 | 56 |
| 04SMF.A93 | 0 | 9 | 84 |
| 04SMF.A84 | 0 | 8 | 112 |
| 04SMF.A75 | 0 | 7 | 140 |
| 04SMF.A66 | 0 | 6 | 168 |
| 04SMF.A57 | 0 | 5 | 196 |
| 04SMF.A48 | 0 | 4 | 224 |
| 04SMF.A39 | 0 | 3 | 252 |
| 04SMF.A2A | 0 | 2 | 280 |
| 04SMF.A1B | 0 | 1 | 308 |
| 04SMF.A0C | 0 | 0 | 336 |

Note: Each OC-3 can provide either three DS3s or three STS-1s but not a combination of DS3s and STS-1s.

Table 8-8 lists NCI codes for SONET Optical Multiplexer operating at the OC-48 rate.

Table 8-8 Configuration Network Channel Interface (NCI) Codes - SONET Optical Multiplexing associated with OC-48 or equivalent.

| CONFIGURATION NCI CODE | QUANTITY OF OC-12's | QUANTITY OF OC-3's | QUANTITY OF DS3's/STS-1's |
|---|------------------------|-----------------------|------------------------------|
| One Code must be specified for the Multiplexer Site | | | |
| 04SNF.E | 4 | 0 | 0 |
| 04SNF.D4 | 3 | 4 | 0 |
| 04SNF.D31 | 3 | 3 | 3 |
| 04SNF.D22 | 3 | 2 | 6 |
| 04SNF.D13 | 3 | 1 | 9 |
| 04SNF.D04 | 3 | 0 | 12 |
| 04SNF.C8 | 2 | 8 | 0 |
| 04SNF.C71 | 2 | 7 | 3 |
| 04SNF.C62 | 2 | 6 | 6 |
| 04SNF.C53 | 2 | 5 | 9 |
| 04SNF.C44 | 2 | 4 | 12 |
| 04SNF.C35 | 2 | 3 | 15 |
| 04SNF.C26 | 2 | 2 | 18 |
| 04SNF.C17 | 2 | 1 | 21 |
| 04SNF.C08 | 2 | 0 | 24 |
| 04SNF.BC | 1 | 12 | 0 |
| 04SNF.BB1 | 1 | 11 | 3 |
| 04SNF.BA2 | 1 | 10 | 6 |
| 04SNF.B93 | 1 | 9 | 9 |
| 04SNF.B84 | 1 | 8 | 12 |
| 04SNF.B75 | 1 | 7 | 15 |
| 04SNF.B66 | 1 | 6 | 18 |

Note: Each OC-3 can provide either three DS3s or three STS-1s but not a combination of DS3s and STS-1s.

Table 8-8 Configuration Network Channel Interface (NCI) Codes -
OC-48 SONET Optical Multiplexer. (Continued)

| CONFIGURATION NCI CODE | QUANTITY OF OC-12's | QUANTITY OF OC-3's | QUANTITY OF DS3's/STS-1's |
|---|------------------------|-----------------------|------------------------------|
| One Code must be specified for the Multiplexer Site | | | |
| 04SNF.B57 | 1 | 5 | 21 |
| 04SNF.B48 | 1 | 4 | 24 |
| 04SNF.B39 | 1 | 3 | 27 |
| 04SNF.B2A | 1 | 2 | 30 |
| 04SNF.B1B | 1 | 1 | 33 |
| 04SNF.B0C | 1 | 0 | 36 |
| 04SNF.AG | 0 | 16 | 0 |
| 04SNF.AF1 | 0 | 15 | 3 |
| 04SNF.AE2 | 0 | 14 | 6 |
| 04SNF.AD3 | 0 | 13 | 9 |
| 04SNF.AC4 | 0 | 12 | 12 |
| 04SNF.AB5 | 0 | 11 | 15 |
| 04SNF.AA6 | 0 | 10 | 18 |
| 04SNF.A97 | 0 | 9 | 21 |
| 04SNF.A88 | 0 | 8 | 24 |
| 04SNF.A79 | 0 | 7 | 27 |
| 04SNF.A6A | 0 | 6 | 30 |
| 04SNF.A5B | 0 | 5 | 33 |
| 04SNF.A4C | 0 | 4 | 36 |
| 04SNF.A3D | 0 | 3 | 39 |
| 04SNF.A2E | 0 | 2 | 42 |
| 04SNF.A1F | 0 | 1 | 45 |
| 04SNF.A0G | 0 | 0 | 48 |

Note: Each OC-3 can provide either three DS3s or three STS-1s but not a combination of DS3s and STS-1s.

Table 8-9 shows the general structure for determining NCI codes for SONET Optical Multiplexer operating at the OC-192 rate. OC-192 Multiplexers can provide OC-12 through DS3 or STS-1 interfaces. Not all logically possible combinations are available.

Table 8-9 General Configuration Network Channel Interface (NCI)
Codes -- OC-192 SONET Optical Multiplexer

| CONFIGURATION NCI CODE Positions 1 through 6 | QUANTITY OF OC-12's Position 7 | QUANTITY OF OC-3's Position 8 | QUANTITY OF DS3's/STS-1's Position 9 |
|---|--------------------------------------|-------------------------------------|--|
| 04SNF. | A = 0 | 0 = 0 | 1 = 3 |
| | B = 1 | 1 = 1 | 2 = 6 |
| | C = 2 | 2 = 2 | 3 = 9 |
| | D = 3 | 3 = 3 | 4 = 12 |
| | E = 4 | 4 = 4 | 5 = 15 |
| | F = 5 | 5 = 5 | 6 = 18 |
| | G = 6 | 6 = 6 | 7 = 21 |
| | H = 7 | 7 = 7 | 8 = 24 |
| | I = 8 | 8 = 8 | 9 = 27 |
| | J = 9 | 9 = 9 | A = 30 |
| | K = 10 | A = 10 | B = 33 |
| | L = 11 | B = 11 | C = 36 |
| | M = 12 | C = 12 | D = 39 |
| | N = 13 | D = 13 | E = 42 |
| | O = 14 | E = 14 | F = 45 |
| | P = 15 | F = 15 | G = 48 |

Table 8-9 General Configuration Network Channel Interface (NCI) Codes - OC-192 SONET Optical Multiplexer. (Continued)

| CONFIGURATION NCI CODE Positions 1 through 6 | QUANTITY OF OC-12's Position 7 | QUANTITY OF OC-3's Position 8 | QUANTITY OF DS3's/STS-1's Position 9 |
|---|--|---|--|
| 04SNF. | Q = 16 | G = 16 | H = 60 |
| | ° | H = 20 | I = 72 |
| | ° | I = 24 | J = 84 |
| | ° | J = 28 | K = 96 |
| | ° | K = 32 | L = 108 |
| | ° | L = 36 | M = 120 |
| | ° | M = 40 | N = 132 |
| | ° | N = 44 | O = 144 |
| | ° | P = 48 | P = 156 |
| | ° | Q = 52 | Q = 168 |
| | ° | R = 56 | R = 180 |
| | ° | S = 60 | S = 192 |
| | ° | T = 64 | |

Note: Each OC-3 can provide either three DS3s or three STS-1s but not a combination of DS3s and STS-1s.

Not all combinations of Table 8-9, NCI codes are physically possible or available.

Certain OC-192 nodes can drop OC48, OC12, OC3, and STS-1/DS3 services. The code set SN supports OC12, OC3, and STS-1 services. The SN code set is to be used when number of OC48s at the Node is zero. The SQ code set is used when dropping OC48s from an Oc192 Node. The following table lists NCI codes for Optical Multiplexer to an OC-192 Path, arranged to support drop rates of OC-48, OC-12, OC-3, and STS-1/DS3. This code shall be only for multiplexers that support ALL of these specified drops. Due to the quantity of possible Position combinations, only the General Format tale is listed.

Table 8-10 General Format (SQ) for Configuration Network Channel Interface (NCI)
Codes - OC-192 SONET Path -- Optical Multiplexer

| CONFIGURATION NCI CODE Positions 1 through 6 | QUANTITY OF OC-48/OC-12's Position 7 | QUANTITY OF OC-3's Position 8 | QUANTITY OF DS3's/STS-1's Position 9 |
|---|--|-------------------------------------|--|
| One Code must be specified for the Multiplexer Site | | | |
| 04SQF. | A = 1/0 | 0 = 0 | 1 = 3 |
| | B = 1/1 | 1 = 1 | 2 = 6 |
| | C = 1/2 | 2 = 2 | 3 = 9 |
| | D = 1/3 | 3 = 3 | 4 = 12 |
| | E = 1/4 | 4 = 4 | 5 = 15 |
| | F = 1/5 | 5 = 5 | 6 = 18 |
| | G = 1/6 | 6 = 6 | 7 = 21 |
| | H = 1/7 | 7 = 7 | 8 = 24 |
| | I = 1/8 | 8 = 8 | 9 = 27 |
| | J = 1/9 | 9 = 9 | A = 30 |
| | K = 1/10 | A = 10 | B = 33 |
| | L = 1/11 | B = 11 | C = 36 |
| | M = 1/12 | C = 12 | D = 39 |
| | N = 2/0 | D = 13 | E = 42 |
| | P = 2/1 | E = 14 | F = 45 |
| | Q = 2/2 | F = 15 | G = 48 |
| | R = 2/3 | G = 16 | H = 60 |

Table 8-10 General Format (SQ) for Configuration Network Channel Interface (NCI)
Codes - OC-192 SONET Path -- Optical Multiplexer (Continued)

| CONFIGURATION NCI CODE Positions 1 through 6 | QUANTITY OF OC-48/OC-12's Position 7 | QUANTITY OF OC-3's Position 8 | QUANTITY OF DS3's/STS-1's Position 9 |
|---|---|--|--|
| One Code must be specified for the Multiplexer Site | | | |
| 04SQF. | S = 2/4 T = 2/5 U = 2/6 V = 2/7 W = 2/8 X = 3/0 Y = 3/1 Z = 3/2 1 = 3/3 2 = 3/4 3 = 4/0 | H = 20 I = 24 J = 28 K = 32 L = 36 M = 40 N = 44 P = 48 Q = 52 R = 56 S = 60 T = 64 | I = 72 J = 84 K = 96 L = 108 M = 120 N = 132 O = 144 P = 156 Q = 168 R = 180 S = 192 |

Note: Each OC-3 can provide either three DS3s or three STS-1s but not a combination of DS3s and STS-1s.

Certain OC192 nodes can drop OC48, OC12, and OC3 services. The code set SP supports OC-48, OC12, and OC3 services. This code set applies only for multiplexers that support ALL of these specified drops. Due to the quantity of possible Position combinations, only the General Format table is listed.

Table 8-11 General Format (SP) for Configuration Network Channel Interface (NCI)
Codes - OC-192 SONET Path -- Optical Multiplexer

| CONFIGURATION NCI CODE Positions 1 through 6 | QUANTITY OF OC-48s Position 7 | QUANTITY OF OC-12's Position 8 | QUANTITY OF OC-3's Position 9 |
|---|-------------------------------------|--------------------------------------|-------------------------------------|
| One Code must be specified for the Multiplexer Site | | | |
| 04SPF. | A = 0 | 0 = 0 | 1 = 1 |
| | B = 1 | 1 = 1 | 2 = 2 |
| | C = 2 | 2 = 2 | 3 = 3 |
| | D = 3 | 3 = 3 | 4 = 4 |
| | E = 4 | 4 = 4 | 5 = 5 |
| | | 5 = 5 | 6 = 6 |
| | | 6 = 6 | 7 = 7 |
| | | 7 = 7 | 8 = 8 |
| | | 8 = 8 | 9 = 9 |
| | | 9 = 9 | A = 10 |
| | | A = 10 | B = 11 |
| | | B = 11 | C = 12 |
| | | C = 12 | D = 16 |
| | | | E = 20 |
| | | | F = 24 |
| | | | G = 28 |

Table 9-11 General Format (SP) for Configuration Network Channel Interface (NCI)
Codes - OC-192 SONET Path -- Optical Multiplexer (Continued)

| CONFIGURATION NCI CODE Positions 1 through 6 | QUANTITY OF OC-48s Position 7 | QUANTITY OF OC-12's Position 8 | QUANTITY OF OC-3's Position 9 |
|---|---|--|---|
| One Code must be specified for the Multiplexer Site | | | |
| 04SPF. | | | H= 32 I= NA J= 36 K= 40 L= 44 M= 48 N= 52 O= NA P= 56 Q= 60 R= 64 |

CONTENTS

| Chapter and Section | Page |
|--|-------------|
| 9. Extended-UDIT (E-UDIT)..... | 9-1 |
| 9.1 Introduction..... | 9-1 |
| 9.2 General Description..... | 9-1 |
| 9.3 Basic Transport Facility..... | 9-4 |
| 9.3.1 Establishing the Facility..... | 9-4 |
| 9.3.2 Description of Optical Interfaces | 9-5 |
| 9.3.3 Description of DS1 Metallic Interfaces..... | 9-6 |
| 9.3.4 NCI Codes in Qwest Wire Center..... | 9-7 |
| 9.3.5 Channel/Interface Level Relationships | 9-8 |
| 9.4 Compatible NC and NCI Codes..... | 9-8 |
| 9.5 E-UDIT Parameters..... | 9-8 |
| 9.6 Entrance to Other Carrier's Wire Center..... | 9-8 |
| 9.7 Example of NC and NCI Code Usage | 9-9 |
| 9.8 SONET Optical Multiplexer Configuration NCI Codes..... | 9-11 |

Figures

| | | |
|-----|---|------|
| 9-1 | Typical E-UDIT Arrangement | 9-2 |
| 9-2 | Typical E-UDIT Plus UDIT Arrangement..... | 9-3 |
| 9-3 | Example – Jointly Provided Facility | 9-11 |

CONTENTS (Continued)

| Tables | Page |
|---|-------------|
| 9-1 Optical Interface NCI Codes (SONET) | 9-5 |
| 9-2 DS1 Metallic NCI Codes | 9-7 |
| 9-3 NCI Codes in Qwest Wire Center | 9-7 |
| 9-4 E-UDIT Compatible NC and NCI Codes | 9-9 |
| 9-5 UNEs Ordered by CLEC -- Jointly Provided Facility | 9-10 |

9. Extended-UDIT (E-UDIT)

9.1 Introduction

Extended-UDIT (E-UDIT) is unbundled dedicated interoffice transport between a Qwest *Serving* Wire Center and a CLEC's wire center within Qwest territory. E-UDIT may be connected to the CLEC's Interconnector Designated Equipment (IDE) collocated in the Qwest *Serving* Wire Center.

9.2 General Description

E-UDIT provides a two-point dedicated transport channel at the DS1, DS3, or OCn levels.

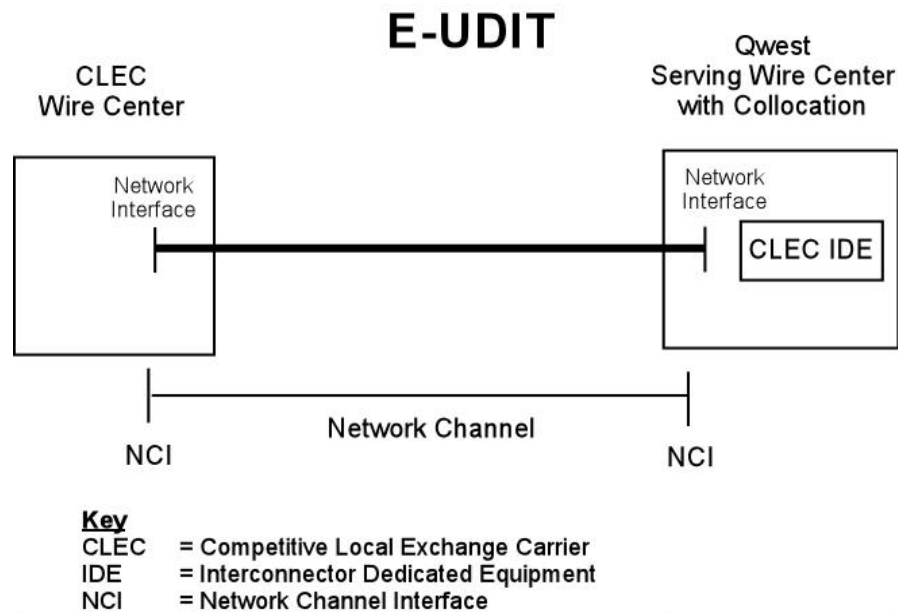


Figure 9-1: E-UDIT Arrangement

There is no unbundled multiplexing available with E-UDIT. Qwest will not place any electronic equipment in the CLEC's wire center beyond the NI. The CLEC is responsible for providing any additional multiplexing or other electronic equipment.

The channels available with E-UDIT are generally the same as the DS1 or above channels available with UDIT. The Network Interfaces (NIs) in the Qwest wire center are the same as the NIs available with UDIT. An E-UDIT and a UDIT can be established at the same time. The following figure illustrates that type of situation.

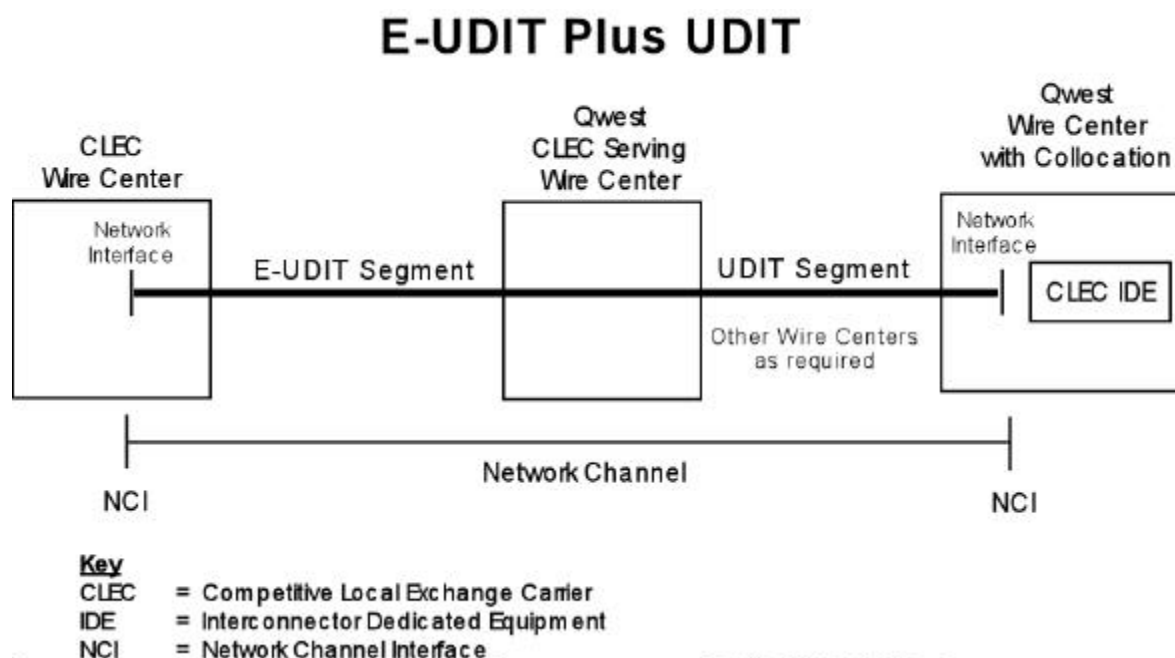


Figure 9-2: E-UDIT and UDIT Arrangement

The NIs available at the CLEC's wire center will depend on the existing facility and equipment. The Network Channel Interface (NCI) codes listed in this chapter list the NIs available.

The CLEC is responsible for all facilities and equipment on their side of the NI.

9.3 Basic Transport Facility

9.3.2 Description of Optical Interfaces

The optical NIs are all Synchronous Optical NETwork (SONET) interfaces.

OC-3 Interface

An OC-3 interface provides a high capacity channel for the transmission of 155.52 Mbit/s channels. This NI requires joint engineering. The physical NI could be a FDP or a splice depending on the location of the NI. Table 9-1 lists the descriptions of the SONET NIs available. Additional information about this interface may be found in PUB 77346.

Table 9-1: Optical Interface NCI Codes (SONET)

| NCI Code | Description | Application |
|----------|---|--|
| 04SOF.F | SR-MLM (Short Reach - Multi-Longitudinal Mode) | Digital fiber optic interface: OC-3 and OC-12 * |
| 04SOF.D | IR1-SLM (Intermediate Reach - Single-Longitudinal Mode) | Digital fiber optic interface: OC-3, OC-12 and OC-48 * |
| 04SOF.B | LR1-SLM (Long Reach - Single-Longitudinal Mode) | Digital fiber optic interface: OC-3, OC-12, OC-48 and OC-192 * |

* An NC Code is required in addition to the Optical Interface NCI Code to identify the service application and effective rate of OC-3, OC-12, OC-48 or OC-192. Not all interfaces are available for every SONET rate.

OC-12 Interface

An OC-12 interface provides a high capacity channel for the transmission of 622.08 Mbit/s channels. This NI requires joint engineering. The physical NI could be a FDP or a splice depending on the location of the NI. Table 9-1 lists the descriptions of the SONET NIs available. Additional information about this interface may be found in PUB 77346.

OC-48 Interface

An OC-48 interface provides a high capacity channel for the transmission of 2.488 Gbit/s channels. This NI requires joint engineering. The physical NI could be a FDP or a splice depending on the location of the NI. Table 9-1 lists the descriptions of the SONET NIs available.

OC-192 Interface

An OC-192 interface provides a high capacity channel for the transmission of 9.865 Gbit/s channels. This NI requires joint engineering. The physical NI could be a FDP or a splice depending on the location of the NI.

Table 9-1 lists the descriptions of the SONET NIs available. Additional information about this interface may be found in PUB 77346.

9.3.3 Description of DS1 Metallic Interfaces

A DS1 interface provides a high capacity channel for the transmission of 1.544 Mbit/s channels. The DS1 NI available is the “DJ” NI. This NI is described in PUB 77375. Sections of PUB 77375 pertaining to *end-user customer location* **DO NOT** apply to E-UDIT. This section contains excerpts from the pub.

The “DJ” NI requires joint engineering. This NI provides a *jointly designed* signal and is not templated. The physical NI is normally a splice or connecting block and can be located remotely from the CLEC’s premises. Qwest will not place regeneration equipment on CLEC’s premises. The “DJ” NI will work with metallic facilities.

Table 9-2 lists the descriptions of the DS1 NIs available.

Table 9-2: DS1 Metallic NCI Codes

| Line Code and Frame Format | NCI Code with Other Carrier |
|--|-----------------------------------|
| SF & AMI | 04DJ9.15 |
| ANSI ESF & AMI | 04DJ9.1K |
| ANSI ESF & B8ZS | 04DJ9.1S |
| Non-ANSI ESF & AMI | 04DJ9.15K |
| Non-ANSI ESF & B8ZS | 04DJ9.15S |
| Free Framing and B8ZS (May not be available in all situations *) | 04DJ9.15J |
| SF & B8ZS | 04DJ9.15B |

* See PUB 77375 for additional information.

9.3.4 NCI Codes in Qwest Wire Center

Table 9-3 lists the NCI codes available in the Qwest wire center.

Table 9-3: NCI Codes in Qwest Wire Center

| Level | Description | NCI Code |
|--------|--|----------|
| OC-192 | Manual Cross-Connect Termination With No Subrating Capability, Fiber Cross-Connect or Fiber Distribution Bay | 04QBF.LL |
| OC-48 | Manual Cross-Connect Termination With No Subrating Capability, Fiber Cross-Connect or Fiber Distribution Bay | 04QBF.LL |
| OC-12 | Manual Cross-Connect Termination With No Subrating Capability, Fiber Cross-Connect or Fiber Distribution Bay | 04QBF.LL |
| OC-3 | Manual Cross-Connect Termination With No Subrating Capability, Fiber Cross-Connect or Fiber Distribution Bay | 04QBF.LL |
| DS3 | Manual Cross-Connect Termination with no subrating capability | 04QB6.33 |
| | | |
| DS1 | Manual Cross-Connect Termination with no subrating capability | 04QB9.11 |
| | | |

..

9.4 Compatible NC and NCI Codes

Table 9-4 lists the compatible NC and NCI codes to be used when ordering E-UDIT.

The additional Description column includes information such as line code and frame format. The DS1 level line codes include Alternate Mark Inversion (AMI) and Bipolar with Eight Zero Substitution (B8ZS). The frame formats include Superframe (SF) and Extended Superframe (ESF). ESF has both American National Standards Institute (ANSI) and non-ANSI versions.

9.5 E-UDIT Parameters

Technical and performance parameters for E-UDIT are the same as UDIT. The Technical Publications mentioned in this chapter also describe other services. However, some performance parameters, guarantees, etc. that apply to these other services do not apply to E-UDIT unless specifically mentioned.

The technical parameters of Qwest's portion of E-UDIT will be as described in this publication. The parameters of the CLEC's portion will depend on their standards.

9.6 Entrance to CLEC's Wire Center

In the arrangement where Qwest provides a facility to the CLEC's wire center, Qwest will provide one entrance facility to one location at the non-Qwest property. The CLEC will have to arrange for any additional entrance(s) with the property owner.

Table 9-4: E-UDIT Compatible NC and NCI Codes

| Level | Additional Description | NC Code | NCI Codes Qwest's Wire Center | NCI Codes Other Carrier's End | |
|--------|--|---------|-------------------------------------|-------------------------------------|-------------------------|
| OC-192 | None | O G - - | 04QBF.LL | 04SOF.B | |
| OC-48 | None | O F - - | 04QBF.LL | 04SOF.D | 04SOF.B |
| OC-12 | None | O D - - | 04QBF.LL | 04SOF.F 04SOF.D | 04SOF.B |
| OC-3 | None | O B - - | 04QBF.LL | 04SOF.F 04SOF.D | 04SOF.B |
| DS3 | DS3 with M2/3 Multiplexer format | H F - - | 04QB6.33 | 04SOF.F 04SOF.D | 04SOF.B |
| | DS3 with M2/3 Multiplexer format and C-Bit Parity | H F C - | | 04SOF.F 04SOF.D | 04SOF.B |
| | DS3 - Unchannelized | H F - - | | 04SOF.F 04SOF.D | 04SOF.B |
| | DS3 - Unchannelized, With C-Bit Parity | H F C - | | 04SOF.F 04SOF.D | 04SOF.B |
| DS1 | AMI and SF | H C - - | 04QB9.11 | 04SOF.F 04SOF.D | 04SOF.B 04DJ9.15 ** |
| | ANSI ESF and AMI | H C D - | | 04SOF.F 04SOF.D | 04SOF.B 04DJ9.1K ** |
| | ANSI ESF and B8ZS | H C E - | | 04SOF.F 04SOF.D | 04SOF.B 04DJ9.1S ** |
| | Non-ANSI ESF and AMI | H C F - | | 04SOF.F 04SOF.D | 04SOF.B 04DJ9.15K ** |
| | Non-ANSI ESF and B8ZS | H C G - | | 04SOF.F 04SOF.D | 04SOF.B 04DJ9.15S ** |
| | Free Framing and B8ZS (May not be available in some locations.) | H C J - | | 04SOF.F 04SOF.D | 04SOF.B 04DJ9.15J ** |
| | SF and B8ZS | H C Z - | | 04SOF.F 04SOF.D | 04SOF.B 04DJ9.15B ** |

** Metallic cable only. The 04SOF NCI codes apply to fiber cable only.

ENTIRE SECTION, DIAGRAMS, AND CHARTS Moved to Chapter 8, OCn UDIT.

Moved Section 9.8 to Chapter 8, OC-n UDIT (reference new section 8.6)

CONTENTS

| Chapter and Section | Page |
|----------------------------|-------------|
| 10. Definitions..... | 10-1 |
| 10.1 Acronyms..... | 10-1 |
| 10.2 Glossary | 10-2 |

10. Definitions

10.1 Acronyms

| | |
|--------|---|
| AMI | Alternate Mark Inversion |
| ANSI | America National Standards Institute |
| APOT | Actual Point Of Termination |
| B8ZS | Bipolar with 8 Zero Substitution |
| CFA | Connecting Facility Assignment Carrier Facility Assignment |
| CLEC | Competitive Local Exchange Carrier |
| CLFI™ | Common Language® Facility Identification |
| CO | Central Office |
| dB | Decibel |
| DS | Digital Signal |
| DS1 | Digital Signal Level 1 (1.544 Mbit/s) |
| DS3 | Digital Signal Level 3 (44.736 Mbit/s) |
| DS0 | Digital Signal Level 0 (64 kbit/s) (1 voice channel) |
| DSX-1 | Digital Signal Level 1 Cross-connect |
| DSX-3 | Digital Signal Level 3 Cross-connect |
| EICT | Expanded Interconnection Channel Termination |
| ESF | Extended Super Frame |
| FDP | Fiber Distribution Panel |
| E-UDIT | Extended-Unbundled Dedicated Interoffice Transport |
| FOC | Firm Order Confirmation |
| Gbit/s | Gigabit per Second |
| Hz | 1 Hertz (formerly 1 cycle per second) |
| ICDF | InterConnection Distribution Frame |
| IDF | Intermediate Distribution Frame |
| ISDN | Integrated Services Digital Network |
| kbit/s | kilobits per second (1,000 bit/s) |
| LASER | Light Amplification by Stimulated Emission of Radiation |

| | |
|--------|---|
| LEC | Local Exchange Carrier |
| Mbit/s | Megabit per Second |
| NC | Network Channel |
| NCI | Network Channel Interface |
| NI | Network Interface |
| OC | Optical Carrier |
| OC-3 | Optical Carrier level 1 |
| OC-12 | Optical Carrier level 12 |
| OC-48 | Optical Carrier level 48 |
| OC-192 | Optical Carrier level 192 |
| SF | Superframe Format |
| SONET | Synchronous Optical Network |
| STS-1 | Synchronous Transport Signal level 1 |
| TLP | Transmission Level Point |
| UCCRE | Unbundled Customer Controlled Rearrangement Element |
| UDIT | Unbundled Dedicated Interoffice Transport |
| UNE | Unbundled Network Element |
| μf | Micro Farad |

10.2 Glossary

Alternate Mark Inversion (AMI)

A one (mark) pulse which is the opposite polarity as its predecessor.

American National Standards Institute (ANSI)

An organization supported by the telecommunications industry to establish performance and interface standards.

Bandwidth

The range of frequencies that contain most of the energy or power of a signal; also, the range of frequencies over which a circuit of system is designed to operate.

Bipolar With 8 Zero Substitution (B8ZS)

Bipolar 8 Zero Substitution is an application of BPRZ and is an exception to the Alternate Mark Inversion (AMI) line-code rule. It is one method of providing bit independence for digital transmission by providing a minimum 1s density of 1 in 8 bits.

C-Bit Parity

An M-framed application in which the C bits are used for network management and maintenance functions instead of denoting the presence or absence of stuff bits.

Carrier

An organization whose function is to provide telecommunications services. Examples are: Local Exchange Carriers, Interexchange Carriers, Cellular Carriers, etc.

Central Office (CO)

A local switching system (or a portion thereof) and its associated equipment located at a wire center. It is also commonly used to refer to the building that houses the equipment. See Wire Center.

Competitive Local Exchange Carrier (CLEC)

A Local Exchange Carrier certified to do business in a state.

Channel

An electrical or photonic, in the case of fiber optic based transmission systems, communications path between two or more points of termination.

Channelize

The process of multiplexing-demultiplexing channels using analog or digital techniques.

Clear Channel Capability (CCC)

A characteristic of a transmission path in which the bit positions allocated for customer data may represent any combination of zeroes and ones.

Closed-end

The end of a switched service which transmits address signals.

Customer Premises

Denotes a building or portion(s) of a building occupied by a single customer or End-User either as a place of business or residence. Adjacent buildings and the buildings on the same continuous property occupied by the customer and not separated by a public thoroughfare, are also considered the same customer's premises.

Decibel (dB)

A unit measurement of transmission loss, gain, or relative level. It is the logarithmic unit of signal power ratio most commonly used in telephony. It is used to express the relationship between two signal powers, usually between two acoustical, electrical, or optical signals; it is equal to ten times the common logarithm of the ratio of the two signal powers.

Digital Hierarchy Level

The level in the digital hierarchy. The levels and the respective bit rates are:

| <u>Level</u> | <u>Bit Rate</u> | <u>Level</u> | <u>Bit Rate</u> |
|--------------|-----------------|--------------|-----------------|
| DS0 | 64.0 kbit/s | DS3 | 44.736 Mbit/s |
| DS1 | 1.544 Mbit/s | DS4NA | 139.264 Mbit/s |
| DS1C | 3.152 Mbit/s | DS4 | 274.176 Mbit/s |
| DS2 | 6.312 Mbit/s | | |

DS1 Clear Channel

Denotes that 1.536 Mbit/s of a 1.544 Mbit/s DS1 facility are available for customer information. The remaining 8 kilobits, or overhead, are for error correction, framing, and network performance/status/information.

End Office

A designation of a Qwest switching system that occupies the lowest level of the public switched network hierarchy. It is the designation of a switching system that connects lines to lines, and lines to trunks (a local switching system).

End-User (EU)

The term "End-User" denotes any customer of telecommunications service that is not a carrier, except that a carrier shall be deemed to be an "End-User" to the extent that such carrier uses a telecommunications service for administrative purposes without making such service available to others, directly or indirectly. The term is frequently used to denote the difference between a Carrier interface and an interface subject to unique regulatory requirements at non-Carrier customer premises (FCC Part 68, etc.)

Exchange

A unit established by Qwest for the administration of communications service in a specified geographic area that usually embraces a city, town, or village and its environs.

Extended Superframe (ESF) Format

An Extended Superframe consists of twenty-four consecutive DS1 frames. Bit one of each frame (the F-bit) is time shared during the 24 frames to describe a 6 bit frame pattern, a 6 bit Cyclic Redundancy Check (CRC) remainder, and a 12 bit data link. The transfer rate of each is 2 kbit/s, 2 kbit/s, and 4 kbit/s respectively.

Facilities

Facilities are the transmission paths between the demarcation points serving customer locations, a demarcation point serving a customer location and a Qwest Central Office, or two Qwest offices.

Gigabit per Second (Gbit/s)

One billion (1,000,000,000) bits per second.

Impedance

The total opposition offered by an electric circuit to the flow of an alternating current of a single frequency. It is a combination of resistance and reactance and is measured in ohms.

InterConnection Distribution Frame (ICDF)

The generic name for a cross-connect frame(s) designated as the Network Interface between Qwest and a collocated Certified Local Exchange Carrier. ICDFs are generally level-specific (e.g., DS0/voice, DS1, DS3 or optical). These frames typically serve other purposes and normally will have a more specific name depending on usage in a specific location.

Kilobit/Second (kbit/s)

One thousand (1000) bits/second

Local Exchange Carrier (LEC)

Any company or corporation engaged for hire in providing Access and intraLATA communications services.

Loop

The facility which connects the Local Wire Center to the customer's location.

Loop Signaling

Loop signaling uses a DC path, or loop, to convey address and supervisory signaling information.

Meet Point

A meet point is a point of interconnection between two networks, designated by two telecommunications carriers, at which one carrier's responsibility for service begins and the other carrier's responsibility ends.

Meet Point Interconnection Arrangement

A meet point interconnection arrangement is an arrangement by which each local exchange carrier builds and maintains its network to a meet point.

Megabit per Second (Mbit/s)

One million (1,000,000) bits per second

Multiplexer (Mux)

An equipment unit to multiplex, or do multiplexing: Multiplexing is a technique of modulating (analog) or interleaving (digital) multiple, relatively narrow bandwidth channels into a single channel having a wider bandwidth (analog) or higher bit-rate (digital). The term Multiplexer implies the demultiplexing function is present to reverse the process so it is not usually stated.

Network Channel (NC) Code

The Network Channel (NC) code is an encoded representation used to identify both switched and non-switched channel services. Included in this code set are customer options associated with individual channel services, or feature groups and other switched services.

Network Channel Interface (NCI) Code

The Network Channel Interface (NCI) code is an encoded representation used to identify five (5) interface elements located at a Point of Termination (POT) at a central office or at the Network Interface at a customer location. The Interface code elements are: Total Conductors, Protocol, Impedances, Protocol Options, and Transmission Level Points (TLP). (At a digital interface, the TLP element of the NCI code is not used.)

Network Interface (NI)

The point of demarcation on the customer's premises at which Qwest's responsibility for the provision of service ends.

Ohm

The unit of electric resistance.

Open-end

The end of a switched service from which dial tone is drawn.

Optical Carrier (OC)

Optical carrier; the nomenclature for the line rate of the optical transmission signal described in this document.

Premises

Denotes a building or portion(s) of a building occupied by a single customer or End-User either as a place of business or residence.

Protocol

The rules for communication system operation which must be followed if communication is to be effected; the complete interaction of all possible series of messages across an interface. Protocols may govern portions of a network, types of service, or administrative procedures.

Protocol Code

The Protocol (character positions 3 and 4 of the Network Channel Interface [NCI] Code) is a two-character alpha code that defines requirements for the interface regarding signaling and transmission.

Signaling

The transmission of information to establish, monitor, or release connections and/or provide Network Control.

SONET

Synchronous Optical Network (SONET): A standard providing electrical and optical specifications for the physical and higher layers, the first stage of which is at 51.84 Mbit/s, the Optical Channel 1 (OC-1) level. Other rates, defined as OC-n where n=3, 12, 24, 48, or 192.

SONET Optical Terminal (SOT)

A terminal which uses SONET multiplexing to interleave the lower rate payloads, thereby creating a high rate synchronous signal.

Superframe Format (SF)

A superframe consists of 12 consecutive DS1 frames. Bit one of each frame (the F-bit) is used to describe a 12-bit framing pattern during the 12 frames.

Transmission Level Point (TLP)

A point in a transmission system at which the ratio, usually expressed in decibels, of the power of a test signal at that point to the power of the test signal at a reference point, is specified. For example, a zero transmission level point (0 TLP) is an arbitrarily established point in a communication circuit to which all relative levels at other points in the circuit are referred.

Wire Center

A building in which one or more central offices, used for the provision of local exchange services, are located. Also, see Central Office.

CONTENTS

| Chapter and Section | Page |
|--|------|
| 11. References | 11-1 |
| 11.1 American National Standards Institute Documents | 11-1 |
| 11.2 Telcordia Documents | 11-1 |
| 11.3 Qwest Technical Publications..... | 11-1 |
| 11.4 Ordering Information | 11-2 |
| 11.5 Trademarks | 11-3 |

11. References

11.1 American National Standards Institute Documents

- ANSI T1.102-1993 *Digital Hierarchy-Electrical Interfaces.*
- ANSI T1.105.01-1995 Synchronous Optical Network (SONET) -- Automatic Protection
- ANSI T1.105.06-1996 Synchronous Optical Network (SONET) --Physical Layer Specifications.
- ANSI T1.223-1997 *Information Interchange — Structure and Representation of Network Channel (NC) and Network Channel Interface (NCI) Codes for the North American Telecommunications System.*
- ANSI T1.410-1992 *Carrier-to-Customer Metallic Interface -- Digital Data at 64 kbit/s and Subrates.*
- ANSI T1.510-1999 *Network Performance Parameters for Dedicated Digital Services - Specifications.*
- ANSI T1.514-2001 *Network Performance Parameters for Dedicated Digital Services - SONET Bit Rates.*
- ANSI T1.601-1992 *Telecommunications - Integrated Services Digital Network (ISDN) - Basic Access Interface for use on Metallic Loops for Application on the Network Side of the NT (Layer 1 Specification).*

11.2 Telcordia Documents

- GR-253-CORE *Synchronous Optical Network (SONET) Transport Systems: Common Generic Criteria. Issue 2, December 1995.*
- TR-NWT-000335 *Voice Grade Special Access Services - Transmission Parameter Limits and Interface Combinations. Issue 3, May 1993.*
- TR-NWT-000397 *ISDN Basic Access Transport System Requirements. Issue 3, December 1993.*

11.3 Qwest Technical Publications

- PUB 77200 *Qwest DS1 Service and Qwest DS1 Rate Synchronization Service. Issue F, September 2001*

| | |
|-----------|---|
| PUB 77204 | <i>Qwest Digital Data Service Product Description, Applications and Interface Combination.</i> Issue E, September 2001 |
| PUB 77310 | <i>Private Line Voice Grade Analog Channels For Access Service.</i> Issue C, September 2001 |
| PUB 77312 | <i>Qwest Digital Data Service Technical Description.</i> Issue G, September 2001 |
| PUB 77324 | <i>Qwest DS3 Service.</i> Issue E, September 2002 |
| PUB 77344 | <i>Qwest Diversity and Avoidance.</i> Issue B, September 2001 |
| PUB 77346 | <i>Synchronous Service Transport (Synchronous Optical Transport).</i> Issue H, March 2002 |
| PUB 77371 | <i>COMMAND A LINKSM Technical Description And Interface Combinations.</i> Issue D, September 2001 |
| PUB 77375 | <i>1.544 Mbit/s Channel Interfaces.</i> Issue E, September 2001 |
| PUB 77384 | <i>Interconnection - Unbundled Loop.</i> Issue K, March 2002 |
| PUB 77386 | <i>Interconnection and Collocation for Transport and Switched Unbundled Network Elements and Finished Services.</i> Issue H, August 2002. |

11.4 Ordering Information

All documents are subject to change and their citation in this document reflects the most current information available at the time of printing. Readers should check the status and availability of all documents.

Those who are not Qwest employees may order;

American National Standards Institute (ANSI) documents from:

American National Standards Institute
Attn: Customer Service
11 West 42nd Street
New York, NY 10036
Phone: (212) 642-4900
Fax: (212) 302-1286

ANSI has a catalog available that describes their publications.

Telcordia documents from:

Telcordia Customer Relations
8 Corporate Place, PYA 3A-184
Piscataway, NJ 08854-4156
Fax: (732) 699-2559
Phone: (800) 521-CORE (2673) (U.S. and Canada)
Phone: (908) 699-5800 (Others)
Web: www.telcordia.com

Qwest Technical Publications from:

<http://www.qwest.com/techpub>

Federal Communications Commission (FCC) documents may be obtained from:

Superintendent of Documents
Government Printing Office
Washington, D. C. 20402
Phone: 202 783-3238

Employees of Qwest should complete Form RG 31-0033.

11.5 Trademarks

| | |
|-----------------|---|
| CLFI | Trademark of Telcordia |
| COMMAND A LINK | Service Mark of Qwest Communications International Inc. |
| COMMON LANGUAGE | Registered Trademark of Telcordia. |
| Qwest® | Registered Trademark of Qwest Communications International Inc. |

CONTENTS

| Chapter and Section | Page |
|---|------|
| A. Combining Unbundled Network Elements..... | A-1 |
| A.1 General | A-1 |
| A.2 Example 1 -- Loop Only, Connection to Collocated Equipment | A-2 |
| A.3 Example 2 -- Non-Loaded Loop Only For DS1 Transport | A-3 |
| A.4 Example 3 -- Loop and DS1 Transport with Collocation | A-4 |
| A.5 Example 4 -- Loop, Collocated Equipment and Finished Service..... | A-5 |
| A.6 Example 5 -- Loop, Multiplexers and DS3 Transport..... | A-6 |
| A.7 Example 6 -- Loop, Switch and DS1 Transport..... | A-8 |
| A.8 Typical Ordering Process -- An Example..... | A-10 |
| A.8.1 General | A-10 |
| A.8.2 The Steps -- Single Collocation Example..... | A-10 |
| A.8.3 The Steps -- Collocation in Both Wire Centers Example..... | A-13 |

Figures

| | |
|--|------|
| A-1 Unbundled Loop to Collocated Equipment..... | A-2 |
| A-2 Unbundled Loop for DS1 and Collocation..... | A-3 |
| A-3 Unbundled Loop, Collocation and DS1 UDIT | A-4 |
| A-4 Connections With Finished Services..... | A-5 |
| A-5 Loop, Multiplex and DS3 Transport Example..... | A-7 |
| A-6 Loop, Switch and DS1 Transport Example..... | A-9 |
| A-7 Typical Ordering Process Example..... | A-11 |

A. Combining Unbundled Network Elements

A.1 General

Competitive Local Exchange Carriers (CLECs) will use combinations of various Unbundled Network Elements (UNEs) provided by Qwest along with their own facilities and equipment to provide service to their customers.

This appendix is provided to illustrate proper Network Channel (NC) and Network Channel Interface (NCI) code usage when ordering several UNEs with the intent of combining them into a service. Only the portion of these services provided by Qwest and limited connections provided by the CLEC are included in these illustrative examples. The CLEC is responsible for the end-to-end design of any combination of elements and/or their equipment to ensure that the resulting service meets their customer's needs.

There are a number of UNEs included in these examples. They include:

- Unbundled Loop as described in PUB 77384, *Interconnection - Unbundled Loop*.
- Unbundled Dedicated Interoffice Transport (UDIT) as described in Qwest Tech Pub 77389, *Unbundled Dedicated Interoffice Transport*.
- Interconnection and Collocation as described in this technical publication, 77386.
- Unbundled Switch Ports are described in PUB 77391, *Unbundled Switch Elements*.

These publications should be consulted for further information about the respective UNEs.

PUB 77386, *Interconnection and Collocation for Transport and Switched Unbundled Network Elements and Finished Services*, describes the basic issues related to Interconnection and Collocation.

Another document, PUB 77398, *Local Interconnect Service (LIS)*, describes a Finished Service (not a UNE) that may be encountered by a CLEC.

Certain tariffs, catalogs, contracts or regulatory orders may impact the issues related to these services that could modify the following examples. However, the examples should be applicable in most situations. These examples are not intended to provide specific ordering instructions for the UNEs.

The Network Interface (NI) in the Qwest wire center with these UNEs is a cross-connect frame called an InterConnection Distribution Frame (ICDF) frame or a Dedicated ICDF depending on the Interconnection arrangement. See PUB 77386, Chapter 3 for further information. The remainder of this appendix assumes the ICDF Interconnection arrangement is in effect.

The UNEs and their Network Interfaces are described by NC and NCI codes. Some information about the codes used in these examples is included but the appropriate technical publication should be consulted for further information.

These examples omit some detail about the “Design-To” point. See PUB 77386, Chapter 5 for further information on the design requirements related to the “Design-To” point.

A.2 Example 1 -- Loop Only, Connection to Collocated Equipment

Figure A-1 illustrates a situation where the CLEC is collocated in the Qwest wire center and purchases Unbundled Loop elements to reach their customer. It is assumed that there is collocated equipment.

The CLEC has purchased an Unbundled Loop with Loop-Start signaling. The 02QC3.OOD NCI code at the DS0/Voice ICDF NI denotes that it is the open end of the Loop-Start channel. The NI at the End-User’s location is 02LS2 indicating the standard Loop-Start closed end interface. Further information about the Unbundled Loop may be found in PUB 77384.

A jumper is placed to connect the loop to previously placed cables connecting to their collocated Interconnector Designated Equipment (IDE). Further information about the cable and collocation may be found in PUB 77386, Chapter 3.

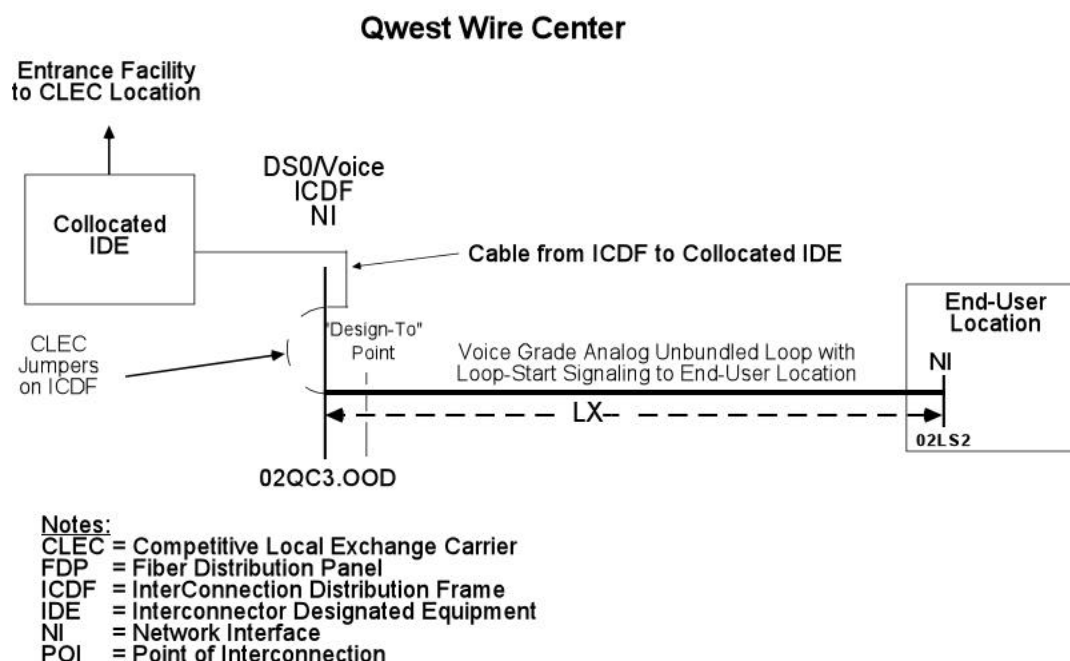


Figure A-1: Unbundled Loop to Collocated Equipment

The entrance facility is probably a Fiber Entrance Facility. This and other types of entrance facilities are described in PUB 77386, Chapter 2.

In this example, the IDE would probably consist of multiplexers and fiber terminal equipment. This equipment is needed to multiplex the loop signal and place it on the fiber cable that would extend the loop to the CLEC's location containing their switch.

A.3 Example 2 -- Non-Loaded Loop Only For DS1 Transport

This example (Figure A-2) is similar to Example 1 in that the CLEC purchases a Non-Loaded Unbundled Loop element from Qwest. The loop, however, is to be used to transport a DS1 to their customer's location using their High-bit-rate Digital Subscriber Line (HDSL) technology. It is assumed that there is collocated IDE.

The NC code LX-N for the Unbundled Loop element denotes a non-loaded Dedicated Facility (without equipment). The two NCI codes denote this facility as being used for HDSL. This designation is used to caution technicians to be aware of higher than normal voltages. Any performance parameters are as described in PUB 77384.

The HDSL equipment is placed by the CLEC in their IDE space and at the End-User's location on their respective sides of the NIs.

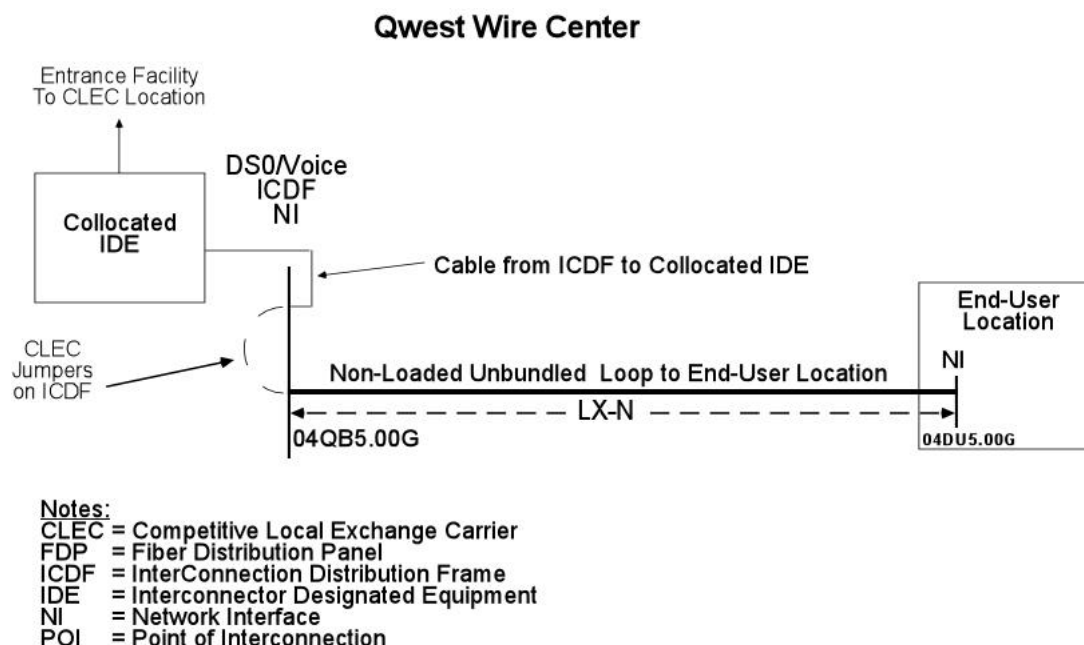



Figure A-2: Unbundled Loop for DS1 and Collocation

A.4 Example 3 -- Loop and DS1 Transport with Collocation

This example (Figure A-3) is similar to Example 1 except that the CLEC does not have an Entrance facility and cable to their location. Instead, the CLEC has purchased a DS1 UDIT to a distant wire center. Further details at the distant wire center are beyond the scope of this example.

It is assumed that there is some IDE collocated in the wire center. The IDE would probably include DS1 multiplexers to multiplex the analog Unbundled Loop up to the DS1 level.

In this example, the collocated IDE would include multiplexing equipment to channelize the DS3 for the voice channel that the CLEC connects to the Unbundled Analog Loop.

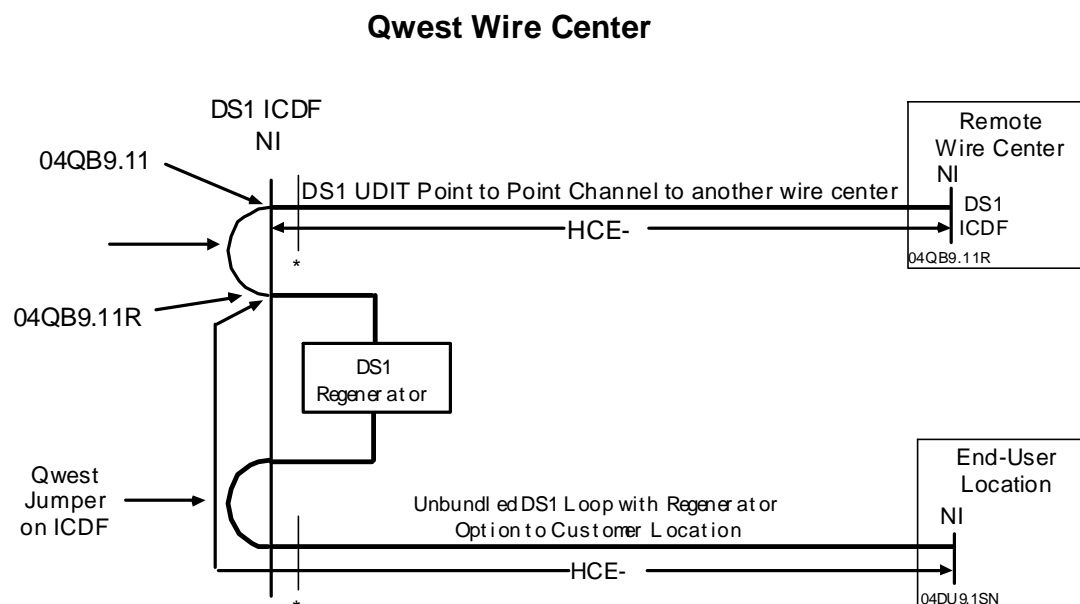

Notes:

CLEC = Certified Local Exchange Carrier
ICDF = Inter Connection Distribution Frame
NI = Network Interface
UDIT = Unbundled Dedicated Inter office Transport

* "Design-To" Point

Figure A-3: Unbundled Loop, Collocation and DS1 UDIT

A.5 Example 4 -- Loop, Collocated Equipment and Finished Service

This example, illustrated in Figure A-4, is similar to Example 1 (Section A.2, Figure A-1). The main difference is that the CLEC is using a DS3 Finished Service (PUB 77324) to enter the Qwest wire center instead of an entrance facility. The DS3 service goes from the CLEC-Point Of Termination (POT) out to the customer (i.e., the CLEC) location. The NC code is HF--. The NCI code at the POT is 04DS6.44. The NCI code at the customer location in this example is not shown.

The POT is similar to an Interexchange Carrier-POT except that it is located in the wire center near the collocated IDE or near the ICDF. It is not located on the ICDF.

Since the DS3 is a Finished Service, Qwest has full design responsibility to the POT. The CLEC provides appropriate equipment and cable to connect the DS3 from the POT to their IDE.

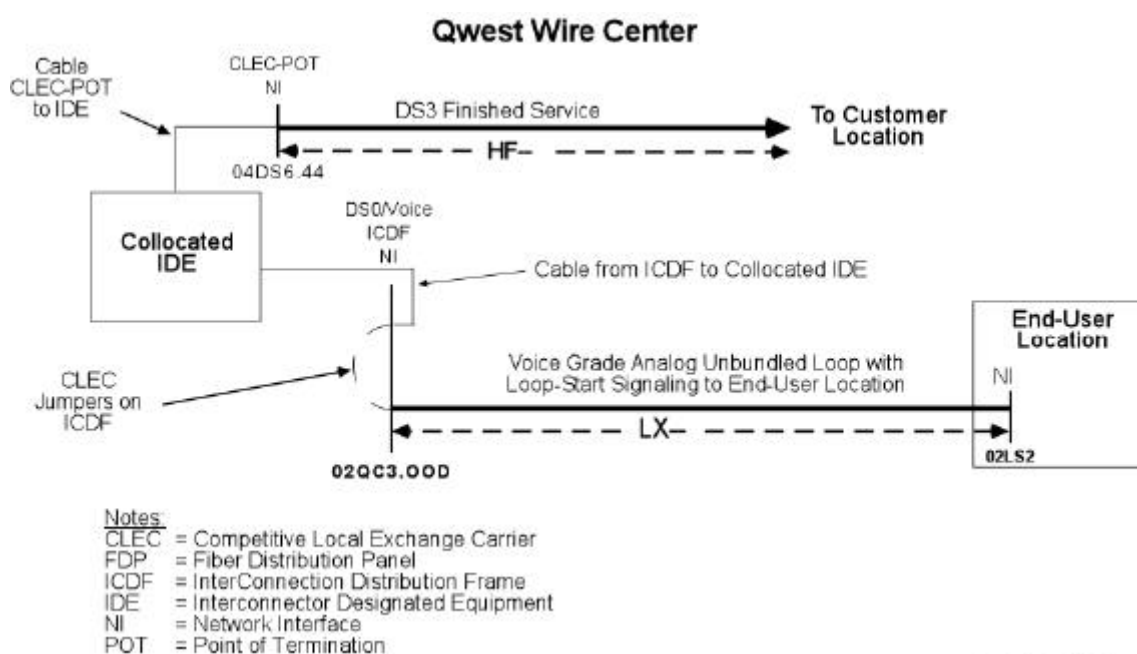


Figure A-4: Connections With Finished Services


A.6 Example 5 -- Loop, Multiplexers and DS3 Transport

Figure A-5 illustrates a situation where the CLEC orders unbundled loops and DS3 level UDIT point to point channels to another Qwest wire center. Multiplexers associated with UDIT at both the DS1 and DS3 levels are ordered to multiplex the loops up to the DS3 level. It is assumed that there is also collocated equipment connected to the DS1 channels from the DS3 Multiplexer.

The unbundled loop is the same as in Example 1. The CLEC wants to connect (using jumper 6) the loop to channel 24 on the DS1 Multiplexer and issues instructions on channel unit selection, placement and options accordingly.

This low-level channel (slot 24) with the NC code LC-- is described as a Voice Line. The NCI code is 02QC2.OOE (the closed end).

The DS1 Multiplexer is described by the NC code HCEG that denotes a DS1 with Voice

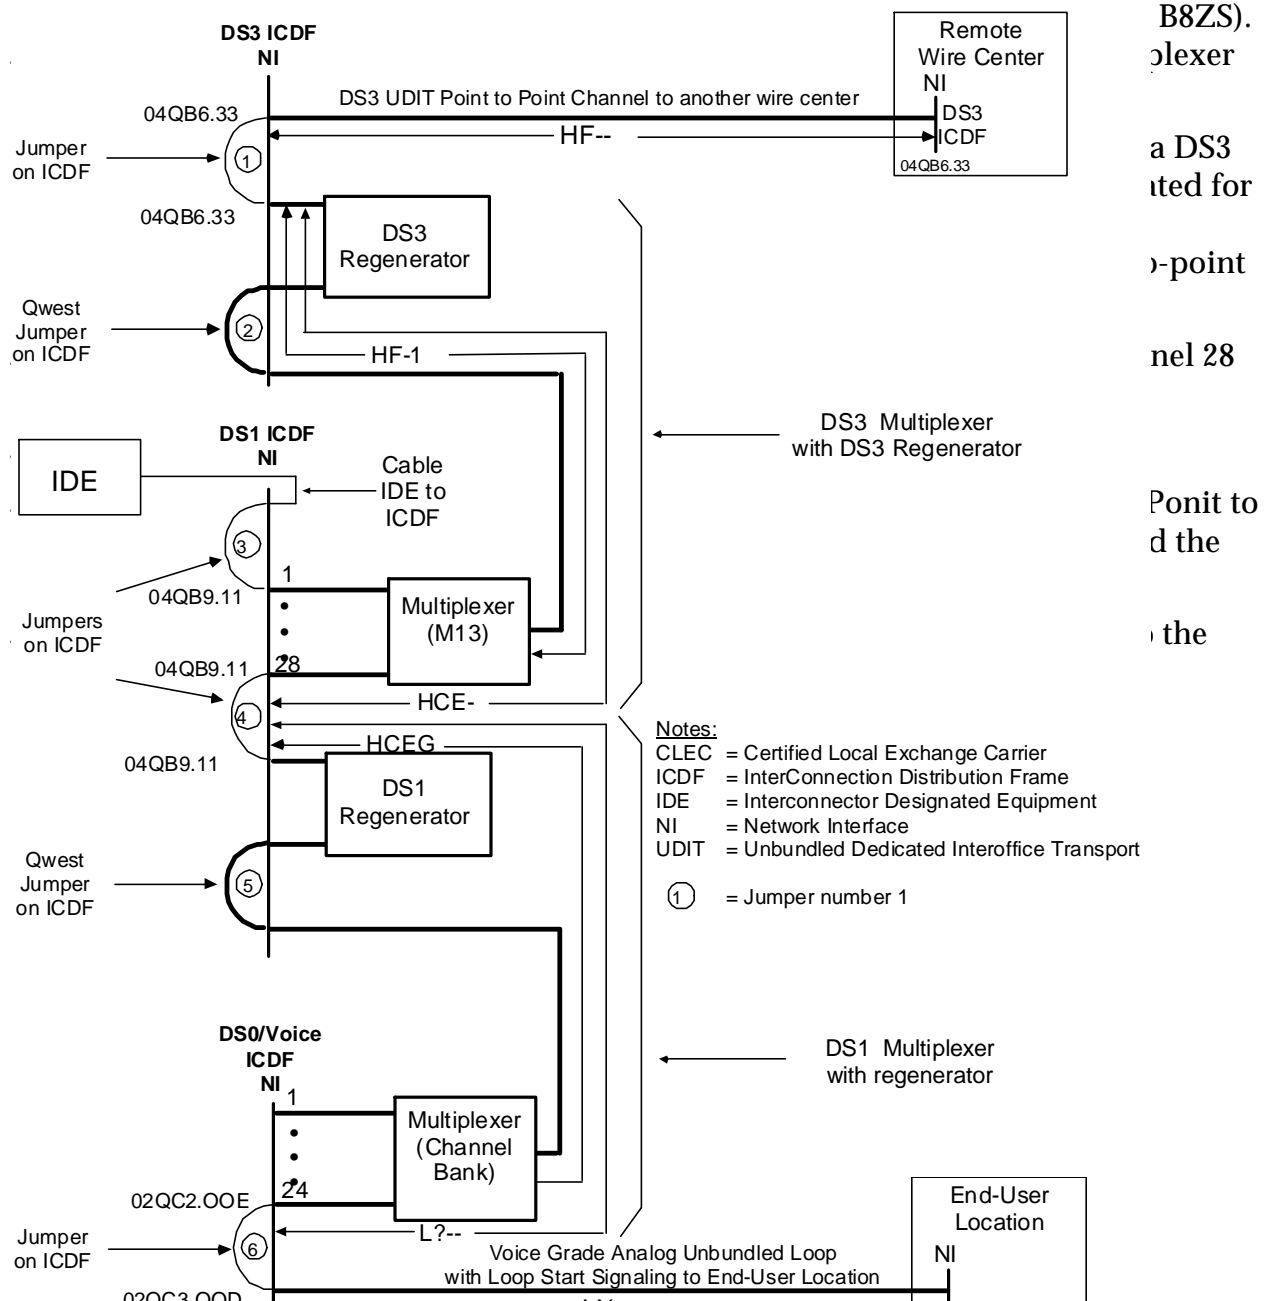

A.7 Example 6 -- Loop, Switch and DS1 Transport

This example illustrates the situation where a CLEC wants to purchase Unbundled Loops and Unbundled Line-side Switch Ports from Qwest. The CLEC also needs to purchase Unbundled DS1 Trunk Ports and DS1 UDIT point to point channel elements to the distant wire center. The trunk port and UDIT requirement is to enable the line-side switch ports to originate calls outside the switch. Similar trunks and UDIT channels are required to other central offices in the same free-calling area but are not included in this example. Custom routing would also be required. It is assumed that there is no collocated equipment and that DS1 regenerators are required on the DS1 UDIT in both wire centers. Figure A-6 illustrates the arrangement. Further details at the distant wire center are beyond the scope of this example.

The point to point UDIT DS1 channel between this wire center and the distant wire center is defined by the NC code HC--. Chapter 5 of this publication defines this DS1 as having Superframe (SF) and Alternate Mark Inversion (AMI). The matching NCI codes, 04QB9.11, designate that the NIs are Manual Cross-Connect terminations with no subrating capability and that the connections are for DS1-to-DS1 cross-connects. . The UDIT channel starts at the DS1 ICDF, goes through the DS1 Regenerator, back to the ICDF, and on to the distant wire center. The channel continues in the distant wire center in the reverse manner. The details are not shown in the distant wire center.

The Unbundled DS1 Switch Port is designated by the NC code SNBT. This code denotes the port as a Switched Access Port Termination using 4-wire local transmission parameters and a trunk termination. The 04QB9.11 NCI code applies at the NI. Further information about this port (along with Custom Routing and the line-side port) may be found in PUB 77391.

The dashed lines indicate a CLEC-provided jumper connecting the UDIT DS1 transport UNE to the DS1 Unbundled DS1 Switch trunk port. It is assumed that further connections will be required at the distant office. The result of this combination of Qwest-provided UNEs and CLEC-provided elements and equipment would be an interoffice trunk group(s) of up to 24 trunks assuming the CLEC ordered multiple trunks.

The situation on the other side of the switch is similar. The NC code SNAL describes an Unbundled Switch Port described as Switched Access Port Termination with 2-wire local transmission parameters with a line termination. The NCI code 02QC3.OOE denotes the NI as a Manual Cross-Connect DS0/Voice termination with the closed end of Loop-Start signaling.

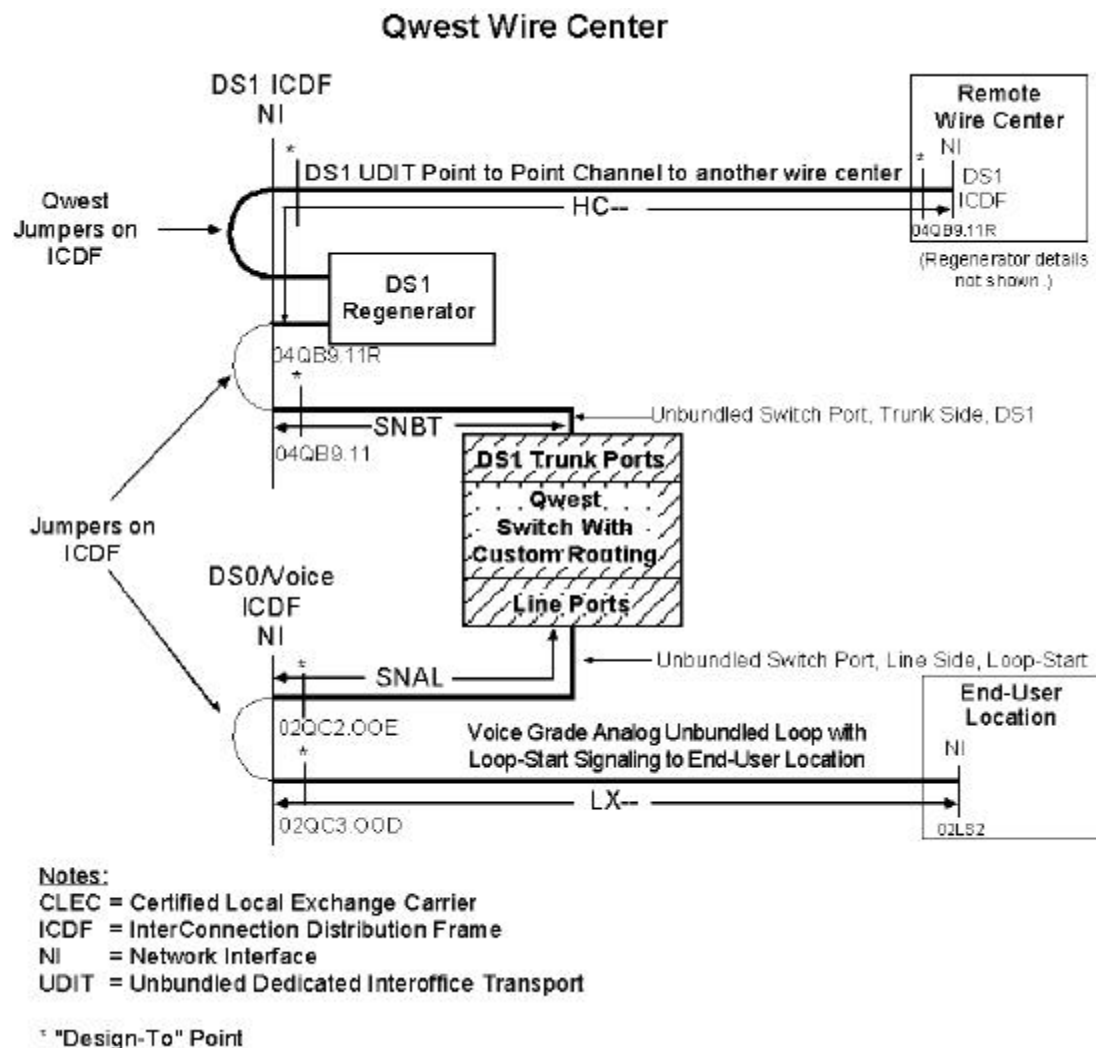


Figure A-6: Loop, Switch and DS1 Transport Example

The CLEC has also purchased an Unbundled Loop with Loop-Start signaling. The 02QC3.OOD is similar to the 02QC3.OOE except that it is the open end. The NI at the End-User's location is 02LS2 indicating the standard Loop-Start closed end interface. Further information about the Unbundled Loop may be found in PUB 77384.

The figure shows the CLEC connecting these two UNEs together to form a standard Plain Old Telephone Service (POTS) line out to their customer.

A.8 Typical Ordering Process -- An Example

A.8.1 General

The process or procedure used to implement a service using combinations of UNEs obtained from Qwest will vary depending on specific situations and normal CLEC processes. This section is intended, by means of an example (with two variations), to illustrate one possible scenario that could be used to implement service to a CLEC customer using UNEs. More detailed information on the specific processes is available during the normal ordering processes.

This example assumes that a CLEC is collocated in a Qwest wire center with a fiber entrance facility connected to transport equipment or IDE. Assume that the CLEC has a small number of customers located in a nearby wire center area wanting DS1 service, but the quantities required are not enough to justify collocating IDE in the nearby wire center.

The solution is to purchase a DS3 point to point UDIT channel between the wire centers, a DS3 multiplexer associated with UDIT in the distant wire center, and DS1 Unbundled Loops as required to meet the demand. The CLEC would connect the DS3 point to point UDIT channel to their collocated IDE at the DS3 level in the collocation wire center.

Since most of the activity takes place in the nearby wire center, designate the wire center containing the collocated IDE as the "Collocation Wire Center". Figure A-8 illustrates the layout of the arrangement similar to the other examples in this appendix. The entrance facility and IDE are not shown in the collocation wire center. The figure illustrates a DS1 Unbundled Loop using Alternate Mark Inversion (AMI) line code and Superframe (SF) format. This arrangement would allow the CLEC to provide a standard DS1 service to their customer

This example also shows a contrasting method of delivering the DS1 services by placing IDE in both wire centers. In this variation, the DS1 line code and frame format are ANSI Extended Superframe (ANSI ESF) with B8ZS line coding, respectively. Assume the DS3 multiplexing function is provided by the IDE in the nearby wire center. This contrasting example yields the same results, but illustrates the use of regenerators.

A.8.2 The Steps -- Single Collocation Example

The following steps could be followed to provide service with no IDE in the wire center. The circled numbers in Figure A-8 indicate the step numbers. Similar steps will be required at the collocation wire center where the CLEC is collocated.

1. Order and install any IDE in the collocation wire center.

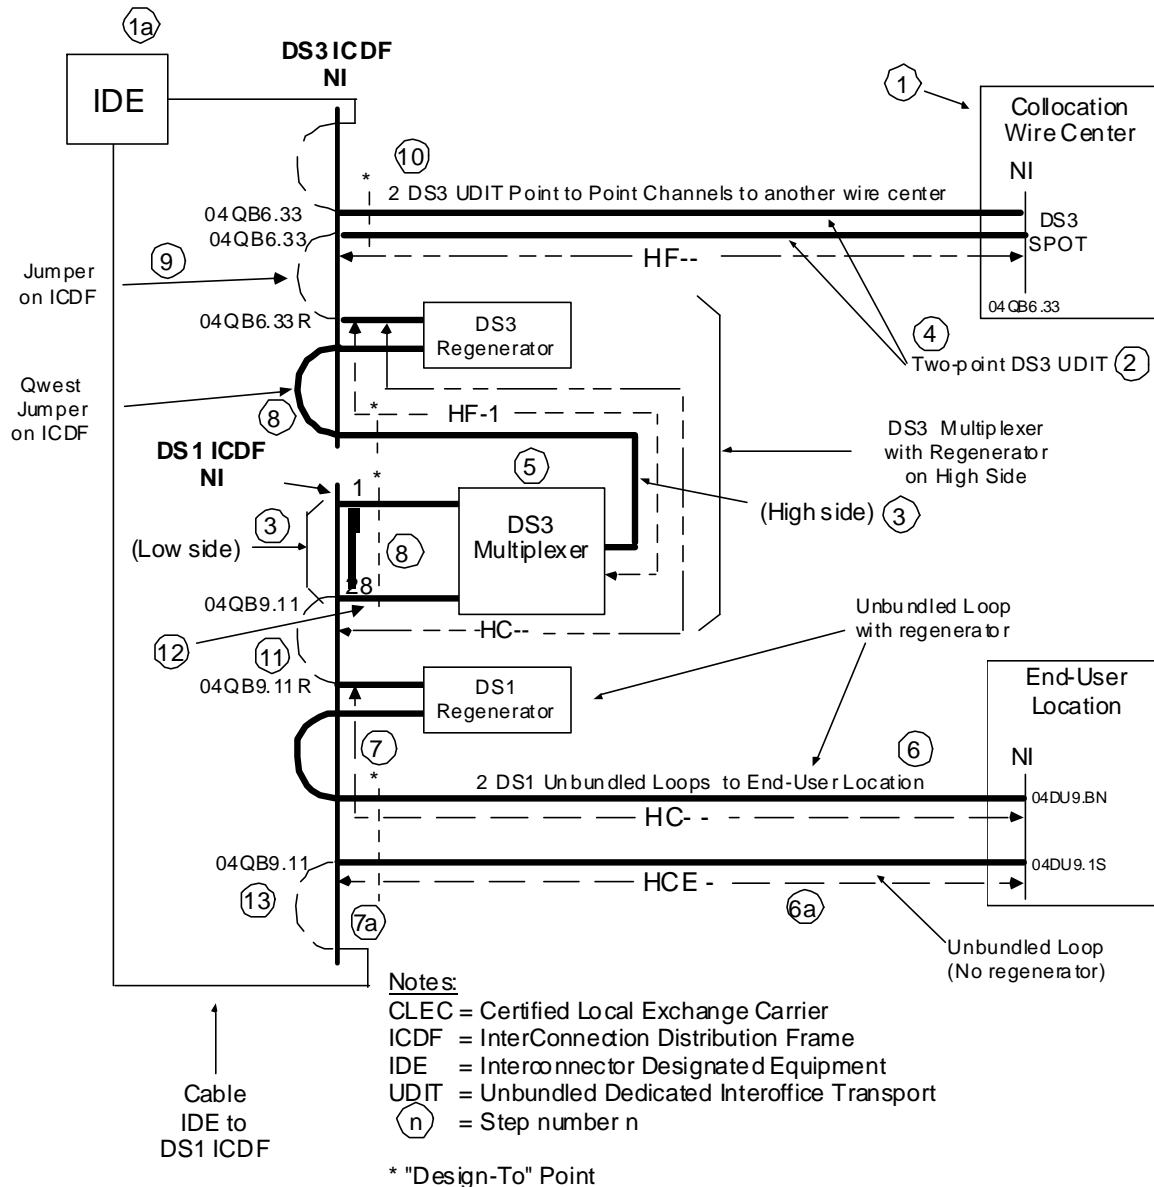


Figure A-7 Typical Ordering Process Example

- Order the UDIT point to point DS3. The NC code is HF-- and the NCI codes at both ends are 04QB6.33. Order cooperative testing if desired for step 10. Make sure to request a Design Layout Report (DLR) to obtain characteristics and termination information needed by the CLEC to make their jumper connections on the DS3 ICDF.

3. Order the DS3 multiplexer associated with UDIT on the high side and all 28 low side DS1 channels. Request DLRs for all 29 orders. Connecting Facility Assignments will specify the multiplexer and identify the channel.

Order cooperative testing if desired for step 10.

The 28 low side DS1 channels are ordered with the NC code HC-- (AMI and SF). Thus, the 28 NCI codes on the DS1 ICDF will all be 04QB9.11. The 28 NCI codes at the DS3 ICDF at the other end of the DS1s will be the same 04QB6.33 NCI code used with the DS3 HFZM channel. .

4. Receive the Firm Order Confirmation (FOC) for the DS3 UDIT from Qwest with the assigned carrier system identification in the form of a Common Language[®] Facility Identification (CLFI[™]) code.
5. Receive information via DLRs about DS3 channels from the multiplexer (high side) including characteristics and terminations on DS3 ICDF.

Receive information via DLRs about the 28 DS1 channels from the multiplexer (low side) including characteristics and terminations on DS1 ICDF.

6. Order the DS1 Unbundled Loop element and request DLR. The NC code is HC-. The NCI code is 04QB9.11 at the DS1 ICDF and 04DU9.BN at the End-User location. The DLR will provide information needed by the CLEC to make their jumper connections on the DS1 ICDF.
7. Receive information (via a DLR) about Unbundled DS1 Loop characteristics and termination on ICDF.
8. Qwest will install DS3 point to point UDIT and DS3 multiplexer UNEs including 28 sets of jumpers on the DSX-1 "Design-To" frame and one set of jumpers on the DSX-3 frame. The jumper connecting the DS3 regenerator to the multiplexer (high side) will be placed. Loop backs will be placed on the 28 DSX-1 frame cross-connects to prevent office alarms until the CLEC completes connections and places a signal on the channels. See Chapter 4 for further information.
9. Jumpers are placed on DS3 ICDF to connect UDIT point to point DS3 transport channel to the DS3 multiplexer (high side).
10. CLEC and Qwest can do cooperative testing to turn up DS3 system end-to-end.
11. Jumpers are placed on DS1 ICDF to connect Unbundled DS1 Loop with regenerator to low-level channel of the multiplexer element.
12. CLEC may request cooperative testing with Qwest to turn up end-to-end DS1 channel. Qwest will remove the loop back from the DSX-1 placed in Step 8 during cooperative testing.

The CLEC will call Qwest through the trouble report process to remove the loop back if cooperative testing was not requested.

The CLEC will keep records of cross-connections and other information about their end-to-end service. The proper selection of NC and NCI codes will enable the CLEC engineers to achieve compatibility with their equipment for their end-to-end service.

The CLEC ordered the following UNEs in this example:

- DS3 UDIT point to point channel (with DLR) between two wire centers
- DS3 Multiplexer (high side, with DLR) associated with UDIT with regenerator
- Twenty-eight (28) Low side DS1 channels of the DS3 Multiplexer (with DLRs)
- DS1 Unbundled Loop (with DLR)

A.8.3 The Steps -- Collocation in Both Wire Centers Example

This variation of the example assumes that the CLEC chooses to place IDE in both wire centers. The CLEC will order only the DS3 UDIT point to point UDIT channel between the wire centers and the DS1 Unbundled Loop. The additional IDE will provide the DS3 multiplexer function.

The step numbers in the following scenario are reused from the previous variation and appear in Figure A-8. Steps have been added or deleted as required.

1. Order and install any IDE in the collocation wire center.
- 1a. Order and install the IDE in the other wire center.
2. Order the UDIT point to point DS3. NC code is HF-- and the NCI codes at both ends are 04QB6.33. Order cooperative testing if desired for step 10. Make sure to request a Design Layout Report (DLR) to obtain characteristics and termination information.
4. Receive the Firm Order Confirmation (FOC) for the DS3 UDIT from Qwest with the assigned carrier system identification in the form of a Common Language[®] Facility Identification (CLFI[™]) code.
- 6a. Order the Unbundled DS1 Loop element with a DLR. The NC code is HCE-. The NCI code is 04QB9.11 at the DS1 ICDF and 04DU9.1S at the End-User location.
- 7a. Receive information (via a DLR) about Unbundled DS1 Loop characteristics and termination on ICDF.
8. Qwest will install DS3 point to point UDIT including one set of jumpers on the DSX-3 "Design-To" frame.
- 9a. Jumpers are placed on DS3 ICDF to connect UDIT point to point DS3 transport channel to their IDE.
10. CLEC and Qwest can do cooperative testing to turn up DS3 system end-to-end.

13. Jumpers are placed on DS1 ICDF to connect Unbundled DS1 Loop to their DS1 IDE.

CLEC may request cooperative testing with Qwest to turn up end-to-end DS1 channel.

The CLEC will keep records of cross-connections and other information about their end-to-end service. The proper selection of NC and NCI codes will enable the CLEC engineers to achieve compatibility with their equipment for their end-to-end service.

The CLEC ordered the following UNEs in this example:

- DS3 UDIT point to point channel (with DLR)
- DS1 Unbundled Loop (with DLR)